AN-150SR AM/FM Antenna Instructions

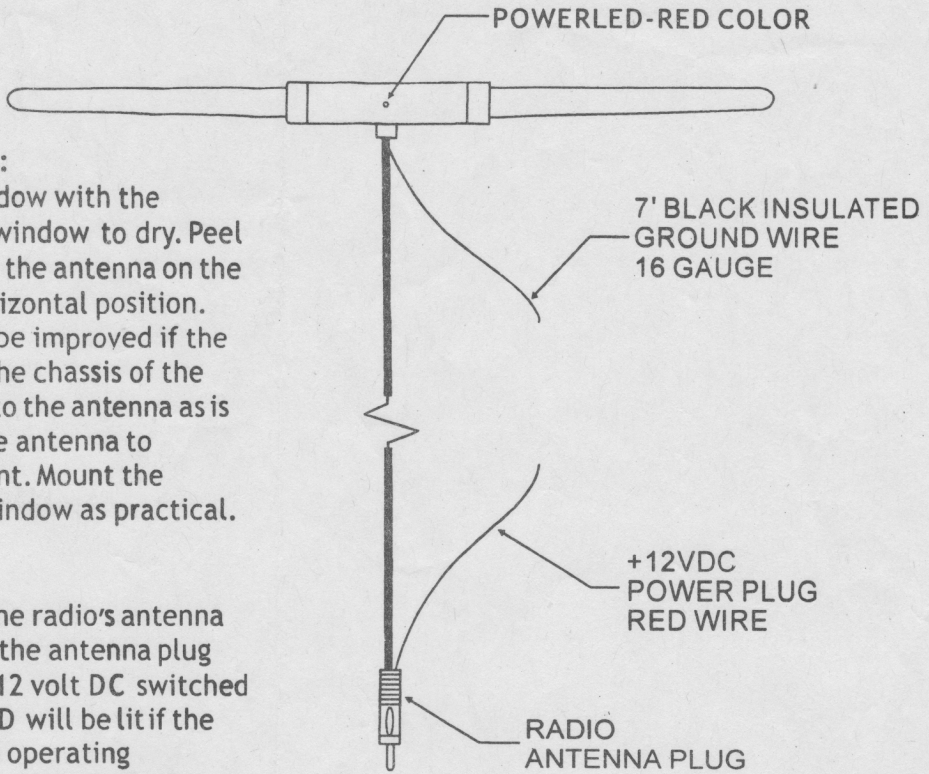

Installation Instructions:
Clean the inside of the window with the supplied towelette. Allow window to dry. Peel off the adhesive and mount the antenna on the inside of the window in horizontal position. Antenna performance will be improved if the ground wire is secured to the chassis of the vehicle as physically close to the antenna as is practical. Do not mount the antenna to windows with metalized tint. Mount the antenna as high up in the window as practical.

Wiring Instructions :
Insert the radio plug into the radio's antenna input. The short wire near the antenna plug must be connected to a + 12 volt DC switched ignition circuit. The red LED will be lit if the antenna is powered up and operating properly. The antenna will not operate if the LED is not illuminated .

Rev. B.12/2000

AN150SR (EGU891B-10)