SERENITY

Owner's Manual



LEISURE
TRAVEL VANS

⚠ WARNING

Operating, servicing and maintaining a passenger vehicle, pickup truck, van, or off-highway motor vehicle can expose you to chemicals including engine exhaust, carbon monoxide, phthalates, and lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. To minimize exposure, avoid breathing exhaust, do not idle the engine except as necessary, service your vehicle in a well-ventilated area and wear gloves or wash your hands frequently when servicing your vehicle.
For more information go to www.P65Warnings.ca.gov/passenger-vehicle

TABLE OF CONTENTS

INTRODUCTION 5
- Owner's Manual 5
- Motorhome Information Kit 6
- Options and Equipment 6
- Vehicle Certification Labels 6
  - Reference Number Codes 6
  - Certification Label Samples 7
- Serenity Floor Plans 8
- Service Assistance 11
- Reporting Safety Defects 11
- Coach Specifications 12

SAFETY 13
- General Safety 13
- Alarms 14
  - Combination Carbon Monoxide / LP Gas Alarm 14
  - Fuel and Propane Safety 15
  - Smoke Alarm 16
- Fire Prevention 16
  - Fire Safety Tips 16
  - Emergency Escape 17
- Fire Extinguisher 17

MOTORHOME OPERATION 19
- Motorhome Preparation 19
- Motorhome Loading and Weights 19
- Towing 20
- Auxiliary Vehicle Towing 20
- Pre-Trip Inspection 21
- Emergency Equipment Checklist 21
- Final Checks 22
- Maximum Occupancy 22
- Seat/Shoulder Belts 22
- Driver/Passenger Seat Controls 24
- Traveling 25
- Driving Characteristics 25
  - Controls 25
  - General Handling 25
  - High Wind Handling 25
  - Mountain Driving 25
- Driving Safety Tips 26
- Travel Tips 26
- Severe Weather Information 27
- Emergencies While Driving 28
  - Hazard Warning Lights 28
  - Flat Tire 28
  - When the Vehicle is Disabled 28
- Parking 29
  - Parking 29
  - Backing Up 29
- Extended Occupancy 30
- Leveling the Motorhome 30
  - Stabilizers 31
- Refueling the Vehicle Chassis 31
  - Fuel Tank Capacity 31
  - Fuel Types 31

Removing The Fuel Cap 32
Filling The Tank 32
Door Locks 32
Locking and Unlocking Procedures 32
Keys 33
Door Strut 33
Entry Door Step 34
Entry Step Electrical Diagram 35
Step Override Switch 35
LIGHTING 36
Cab Entry Light 36
Interior Overhead Light Dimmer Switch 36
Exterior/Interior Light Switches 36
Awning 36
Extending the Awning 36
Retracting the Awning 37
Auto-Retract 37

APPLIANCE AND EQUIPMENT OPERATION 39
Refrigerator 39
Operating the Refrigerator 39
Refrigerator Operating Tips 40
Exterior Refrigerator Compartment 40
Stove Top 40
Lighting Burners 40
Microwave/Convection Oven 41
Operating the Microwave/Convection Oven 41
Microwave/Convection Oven Operating Tips 41
Exterior BBQ Connection 42
Operating the Exterior BBQ Connection 42
LP Gas Furnace 42
Operating the LP Gas Furnace 42
LP Gas Furnace Operating Tips 42
Dometic Comfort Control Center 43
Operating the Thermostat 43
Roof Air Conditioner with Heat 43
Pump 43
Heat Pump 43
Maintaining the Roof Air Conditioner/Heat Pump 44
Coach Power Roof Vent 44
Operating Controls 44
Cleaning Instructions 45
Bathroom Roof Vent 45
Operation Controls 45
Side Window Vents 46
Manual Roof Vent 46
Opening the Roof Vent 46
Closing the Roof Vent 47
Day/Night Roller Shade Controls 47
Positioning Device 47
Tension 47
Entertainment Systems 47
Operating the TV 47
SOundbar Operation 48
BluRay Operation 48
TV Utility Panel 48
External Cable TV Connection 48
External Satellite TV Connection 49
WIFI EXTENDER 49
Entertainment System Schematics 50
Satellite Pre-wire Schematic 51
Forward Bed 52
Double Bed 52
Single Bed 52
Electric Rear Sofa 53
Converting to a Bed 53
Manual Operation 53
Removable Table 54

ELECTRICAL SYSTEM OPERATION 55
Electrical Supply 55
Shore Power 55
Battery Disconnect Switch 55
Wiring Schematic 55
System Monitor 57
Electrical System Components 58
Power Distribution Panel 58
120 Volt AC Circuit Breakers 58
12 Volt DC Coach Fuses 59
12 Volt DC Chassis Fuses 59
Ground Fault Circuit Interrupter (GFCI) 60
Auxiliary LP Gas Generator (Optional) 60
Operating the Auxiliary LP Gas Generator 60
Starting the Auxiliary LP Gas Generator 61
Stopping the Auxiliary LP Gas Generator 61
Auxiliary Diesel Generator (Optional) 61
Starting the Auxiliary Diesel Generator 62
Stopping the Auxiliary Diesel Generator 62
Generator Safety 63
Automatic Power Transfer Switch 63
12 Volt DC system 64
Chassis Battery 64
Coach Batteries (12 Volt DC Power Supply) 64
Coach Battery Condition Meter 65
Battery Maintenance 65
Battery Problems 65

Long-Term Storage 66
Additional Battery Maintenance Suggestions 66
Inverter 67
Inverter Remote Control Panel 68
Surge Guard (Optional) 68
Accidental 240 volt Protection 69
Troubleshooting Guide 69
Solar Power Unit 69
Lighting Maintenance 70
Exterior Lighting 70
Interior Lighting 71

WATER AND PLUMBING SYSTEM 75
Water Supply 75
Fresh Water System 75
City Water Supply 75
Filling the Fresh Water Tank 76
Water Pump Switch 77
Disinfecting the Water Tank 77
Water Pump 78
Water Pump Initial Startup 78
Water Pump Troubleshooting 78
Water Pump Electrical Diagram 79
Draining the Fresh Water System 80
Draining The Hot and Cold Water Systems 80
Water Filter 80
Waste Systems 81
Grey Water Waste Holding Tank 81
Black Water Waste Holding Tank 81
Dumping Holding Tanks 81
Black Water Waste Tank Rinse 81
Macerator 82
Waste Water Holding Tank Do's and don'ts 83
Using On-Site Sewer Hook-Ups 83
Water Heater 84
Water Heater Operation 84
Winterizing 84
Switching ON the Appliance 85
Operating Modes 85
LED Rotary Switch 85
Operating mode / Description 85
Water Fixtures 86
Fresh Water Toilet 86
Manual Flush Toilet 86
Cleaning the Manual Flush Toilet 86
Showers 87
Interior Shower 87
Exterior Shower 87

LIQUID PROPANE GAS SYSTEM 89
LP Gas Control Valve 89
Safe Use of LP Gas 89
Precautions for the Safe Use of LP Gas 89
How LP Gas Works 90
Selecting Fuel Types 90
LP Gas Tank System 90
Refilling the LP Gas Tank 90
After Refilling the LP Gas Tank 91
Air in the LP Gas Tank 91
Traveling with LP Gas 91
LP Gas Tank Regulator 92
LP Gas Leaks 92
Avoiding Asphyxiation 93

MOTORHOME MAINTENANCE 95
Exterior Care and Maintenance 95
Roof 95
Underbody 95
Washing, Waxing and Polishing 95
Stripes and Decals 95
Exterior Lighting 95
Solar Panels 96
Interior Care 96
Carpets 96
Upholstery 96
Spots and Stains 96
Vinyl Fabrics 96
Draperies, Curtains and Bedspreads 96
Walls 97
Cabinetry, Tables and Countertops 97
Refrigerator 97
Stove Top - General 97
Stove Top - Burners 97
Microwave/Convection Oven 98
Bathroom - General 98
Toilet 98
Doors and Windows 98
Storage and Winterization 98
Storage Checklist 98
Cold Temperature Storage 99
Spring Startup 100
Cold Temperature Operation 100
Chassis 100
LP Gas 100
Waste System 100
Water System Winterization 100

Draining the Water System....100
Adding Plumbing Anti-Freeze....101
Blowing Out the Air Lines....101
De-Winterizing the Water Systems....102
Maintenance and Servicing....102
LP Gas Tank Valve....102
Stabilizers....102
Entry Door Step....103

NEW VEHICLE LIMITED WARRANTY 105

INTRODUCTION

Congratulations! Thank you for selecting a Leisure Travel Vans Motorhome.

Welcome to the exciting world of motorhome travel and camping, with all the comforts of home with you, while you travel and enjoy the outdoors.

Your motorhome has been designed and manufactured to enhance your travel and camping experience and to provide you with safe, efficient and trouble-free operation.

Before your first drive, become familiar with the operation of the vehicle chassis and all functions and operations of the motorhome. Spend adequate time with your dealer when you take delivery to learn all you can about your new motorhome.

OWNER'S MANUAL

This manual was prepared to aid the operator and occupants in the operation and care of the motorhome. There are many options to Leisure Travel Vans, so ensure that you are familiar with your motorhome's systems and equipment. All operators and occupants of the motorhome should read, understand and follow the instructions in this manual, the vehicle chassis manual & the information contained in the Motorhome Information Kit provided with your new motorhome.

Your motorhome contains a number of systems, components, equipment and appliances manufactured by vendors that supply components for Triple E RV. These vendors are unrelated to Triple E RV.

Before operating the motorhome for the first time – even if an experienced motorhome operator – read and become familiar with all of the relevant manuals to your motorhome, components, equipment and appliances provided in the Motorhome Information Kit. Your familiarity with the detailed operation of your motorhome will assist in your safe, efficient and trouble-free motorhome operation.

KEEP the Motorhome Information Kit within your motorhome for readily available reference.

PASS this manual, the Chassis Operation Manual and the Motorhome Information Kit to any subsequent operator or owner.

For clarification or further details on any of the enclosed information, please contact:

Your Leisure Travel Vans Dealer or Triple E RV Customer Service at:

Email:	info@tripleerv.com
TollFree:	877-992-9906
Telephone:	204-325-4361
Fax:	204-325-5241

MOTORHOME INFORMATION KIT

The Motorhome Information Kit includes but isn't limited to information on the components, equipment and appliances listed below.

- Refrigerator
- Stove top
- Furnace
- Electrical Panel
- Toilet
- Water Heater
- Water Pump
- Water Filtration
- Vent (roof)
- Fire Extinguisher
- Smoke Detector
- Thermostat
- CO Detector
- Propane Detector
- Gas Regulator
- TV Antenna
- TV/DVD
- Chassis
- Air Conditioner
- Generator
- Stabilizers
- View Monitor
- Inverter
- Entertainment System
- Safety
- Flooring and Countertops
- Electric Step
- Solar Panel
- Surge Protector
- Safe

OPTIONS AND EQUIPMENT

Leisure Travel Vans are available in various sizes and floor plan configurations and with differing optional equipment. The equipment, accessories and components described in this manual may not apply in all respects to your motorhome. Read the material and manuals provided in the Motorhome Information Kit for detailed instructions regarding the equipment specific to your motorhome.

VEHICLE CERTIFICATION LABELS

The vehicle certification labels affixed to your motorhome contain vehicle identification and other important reference information. Never remove or destroy these labels. The labels are located on the driver & passenger door frames. See location details on the following page.

REFERENCE NUMBER CODES

Manufacture/Conversion Date
The date on which the coach portion of your motorhome was built.

GROSS VEHICLE WEIGHT RATING (GVWR)
The maximum permissible weight of this fully loaded motorhome.

SLEEPING CAPACITY WEIGHT RATING (SCWR)
The manufacturer's designated number of sleeping positions multiplied by 154 lbs (70 Kgs).

OCCUPANT AND CARGO CARRYING CAPACITY (OCCC)
The value equal to the GVWR minus UVW and full LP Gas weight. In other words, OCCC is the amount of weight in occupants, cargo, water and trailer tongue weight that can be added to the motorhome without exceeding the GVWR.

GROSS COMBINED WEIGHT RATING (GCWR)
The Gross Combined Weights Rating of the motorhome, i.e., combined weight of the Motorhome and any towed vehicle.

DESIGNATED SLEEPING CAPACITY
The manufacturer's designated number of sleeping positions.

GROSS AXLE WEIGHT RATING (GAWR)
The value specified as the load carrying capacity of a single axle system, as measured at the tire-ground interface.

TIRE SPECIFICATION
Recommended tires specification to meet handling, loading and safety requirements. Replacement tires must meet these specifications.

COLD TIRE INFLATION PRESSURE
Inflation pressures recommended (while cold) for the tires originally installed on your motorhome. These tire pressure levels must be maintained to ensure proper handling, safety and fuel economy.

CARGO CARRYING CAPACITY(CCC)(CANADA)
Equal to GVWR minus each of the following: UVW, full fresh (potable) water weight (including water heater), full LP-Gas weight and SCWR.

UNLOADED VEHICLE WEIGHT (UVW)
The weight of this motorhome as manufactured at the factory with full fuel, engine oil and coolants.

MASS OF WASTE WATER TANKS
Total weight of the black and grey water tanks when filled to capacity.

VEHICLE IDENTIFICATION NUMBER (VIN)
This number identifies the chassis on which the motorhome is built.

TYPE
The National Highway Traffic Safety Association (NHTSA) designated usage classification for your Motorhome. MPV signifies a Multi-purpose vehicle.

CERTIFICATION LABEL SAMPLES


RECREATIONAL VEHICLE SPECIFICATION NAMEPLATE
PLAQUE SIGNALÉTIQUE POUR VÉHICULE RÉCRÉATIF
DO NOT REMOVE
NE PAS ENLEVER
FACTORY INSTALLED APPLIANCES / APPAREILS INSTALLÉS À L'USINE
WARNING:
AVERTISSEMENT:

LOCATED IN WARDROBE CLOSET (CANADA MODELS ONLY)

CARGO-CARRING CAPACITY: KG. CALCULATED WITH THE FRESH WATER TANKS FULL (COLD) KG. HOT KG.) AND THE WASTE WATER TANKS EMPTY		CAPACITÉ DE CHARGEMENT: KG. CALCULÉE AVEC LES RESERVOIRS D'EAU DOUCE PLEINS (FROID) KG. CHAUD KG.) ET LES RÉSERVOIRS D'EAUX USÉES VIDES.	
MASS OF WASTE WATER TANKS FULL:	KG. KG.	MASSE DES RÉSERVOIRS D'EAUX USÉES PLEINS:	KG. KG.

LOCATED ON DRIVER-SIDE DOOR FRAME (CANADA MODELS)

TIRE AND LOAD INFORMATION

SEATING CAPACITY	TOTAL	FRONT	REAR

The combined weight of occupants and cargo should never exceed kg or Lbs.

TIRE	SIZE	COLD TIRE PRESSURE
FRONT		
REAR		
SPARE		

SEE OWNER'S MANUAL FOR ADDITIONAL INFORMATION

LOCATED ON DRIVER-SIDE DOOR FRAME (US MODELS)

Motor Home OCCC Label

LABEL #1
VIN:
Weight of occupants and cargo should never exceed: kg or lbs
Safety belt equipped seating capacity:
A full load of water equals kg or lbs of cargo @ 1 kg/L (8.3 lb/gal)

LOCATED ON PASSENGER-SIDE DOOR FRAME (US MODELS)

MANUFACTURED BY / FABRIQUE PAR: DATE:

DESIGNATED SEATING CAPACITY /
NOMBRE DÉSIGNÉ DE PLACES ASSISE: X 70 KG = KG
GVWR/PNBV KG (LB)

GAWR/PNBE	TIRES/PNEU	RIMS/JANTE	COLD INFL. PRESS./PRESS. DE GONFL. A FROID
FRONT/ AVANT KG (LB)			KPA SINGLE DUAL (PSI/LPC) ☐ ☐
FRONT/ INTERM KG (LB)			KPA SINGLE DUAL (PSI/LPC) ☐ ☐
REAR/ ARRIERE KG (LB)			KPA SINGLE DUAL (PSI/LPC) ☐ ☐

THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S. FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE. THIS VEHICLE CONFORMS TO ALL APPLICABLE STANDARDS PRESCRIBED UNDER THE CANADIAN MOTOR VEHICLE SAFETY REGULATIONS IN EFFECT ON THE DATE OF MANUFACTURE. - CE VEHICULE EST CONFORME A TOUTES LES NORMES QUI LUI SONT APPLICABLES EN VERTU DU REGLEMENT SUR LA SECURITE DES VEHICULES AUTOMOBILES DU CANADA EN VIGUEUR A LA DATE SA FABRICATION.
V.I.N./N.I.V.: TYPE/TYPE:

LOCATED ON DRIVER-SIDE DOOR FRAME (ALL MODELS)

This vehicle contains composite wood products that comply with the applicable California Code of Regulations Section 93120.2(a) Phase 2 (P2) formaldehyde emission standards specified on the above date of manufacture.

LOCATED IN WARDROBE CLOSET (ALL MODELS)

Custom paint colors

LOCATED ON PASSENGER SIDE PILLAR (ALL MODELS)

SERENITY FLOOR PLANS

S24CB PASSENGER SIDE VIEW

1. Light
2. Refrigerator Vents
3. External Receptacles
4. Entrance Step
5. BBQ Hook-Up
6. Storage Compartment
7. Furnace Exhaust
8. Awning

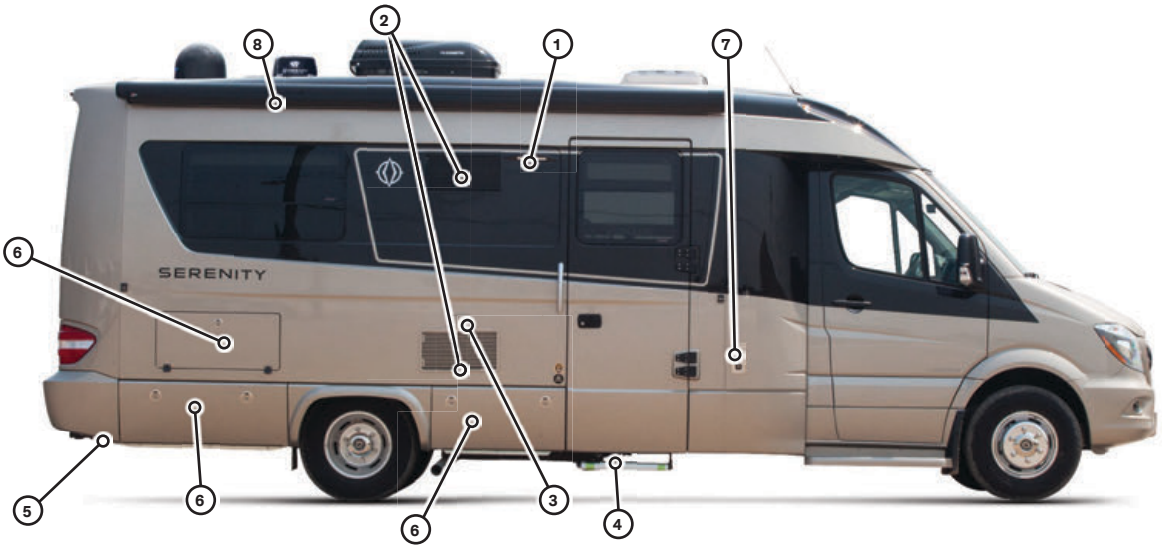

S24CB DRIVER SIDE VIEW

1. Inverter and Storage Compartment
2. Battery Compartment
3. Water Heater
4. Diesel Fill
5. Generator Compartment
6. Sewer Hose (Behind Doors)
7. Shore Power Connection
8. Utility Center



S24CB TOP SIDE VIEW

1. Solar Panel
2. Roof Vent
3. Skylight
4. Air Conditioner
5. Radio Antenna
6. TV/Wifi Antenna
7. Stack Vent
8. Satellite
9. Roof Vent

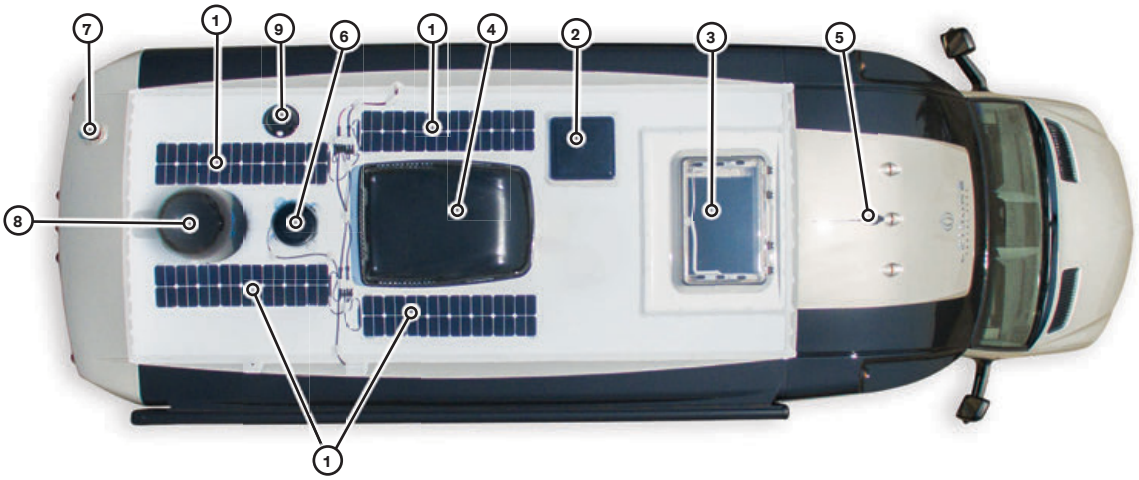

S24CB REAR VIEW

1. Rear View Camera
2. Awning
3. Storage Compartment
4. 7-Pin connector
5. Towing Hitch
6. Stack Vent
7. High Mount Brake Light

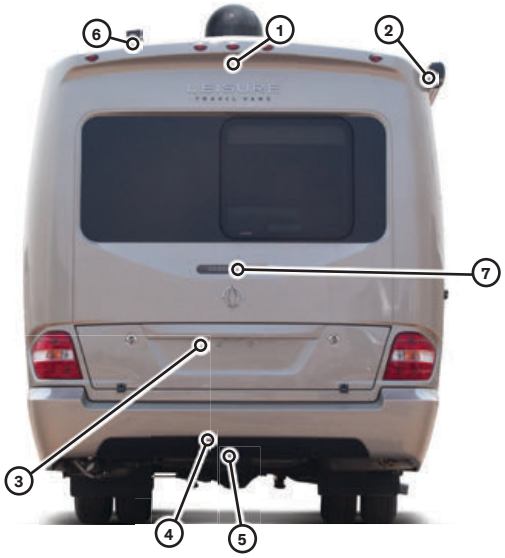

S24CB SOFA FLOOR PLAN

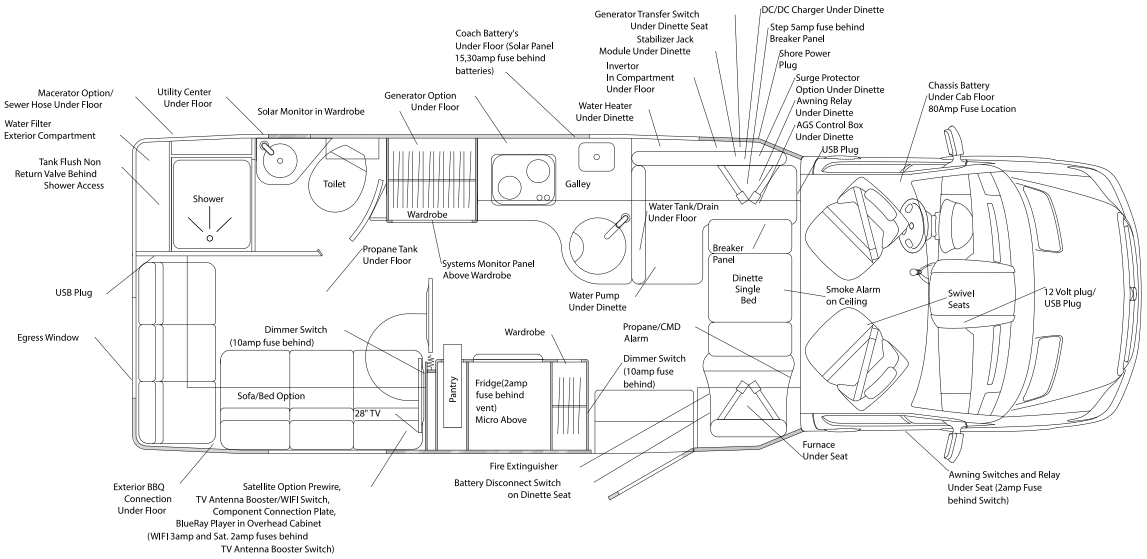

S24CB DOUBLE BED FLOOR PLAN

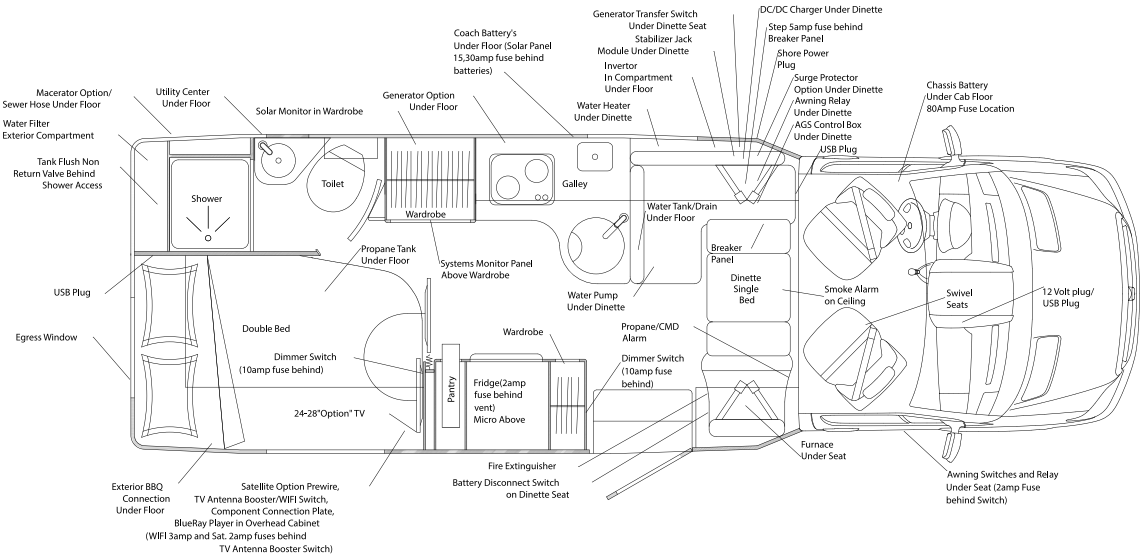

SERVICE ASSISTANCE

Your dealer will assist you with any additional information you need and will answer any questions you have about the operation of your motorhome. When it's time to service the vehicle, remember that your dealer knows your motorhome best and is dedicated to your satisfaction. Your dealer will provide quality maintenance and assistance during your period ownership. Triple E RV strongly recommends that you follow a regular maintenance schedule to keep your motorhome functioning at its best.

Call the following numbers if you require warranty assistance while traveling:

Triple E RV: 1-877-992-9906

Canada Sprinter Customer Service:
1-800-387-0100 www.thesprinter.ca

US Sprinter Customer Service:
1-877-762-8267 www.mbsprinterusa.com

Emergency Roadside Service* Call:
1-877-219-3831
4287 Beltline Road, Box 198
Addison, Texas 75001

*This Emergency Roadside Service is available to owner of the motorhome during the first two years after purchase.

REPORTING SAFETY DEFECTS

If you suspect your motorhome has a safety defect that could cause injury or death, immediately contact Triple E RV. Also, contact the National Highway Traffic Safety Administration (NHTSA) in the US or Transport Canada to report your concern.

NHTSA will investigate the concern if there are a number of similar complaints. NHTSA has the authority to order a recall and repair campaign depending on the nature and severity of the problem.

You can reach the NHTSA by calling the Auto Safety Hotline at 1-800-424-9393 (202-366-0123 in the Washington, DC, area) or by writing to NHTSA, US Department of Transportation, Washington, DC 20590. The hotline also will provide you with additional information on motor vehicle safety.

In Canada, call 1-613-993-9851 or write to Transport Canada and Road Safety, 2780 Sheffield Road, Ottawa, Ontario K1B 3V9.

COACH SPECIFICATIONS

Chassis 3500 Sprinter Engine - 3.0L V6 Blue TEC Diesel 188hp / 325 lb-ft Torque Transmission - 5 Speed Automatic Turning Circle - 54.5' Axel Ratio - 3.92:1 Tires - LT215/85R16	S24CB
GVWR - lbs (kg)	11,030 (5003)
GCWR - lbs (kg)	15,250 (6917)
GAWR Front- lbs (kg)	4,410 (2000)
GAWR Back - lbs (kg)	7,720 (3502)
Wheelbase - in (mm)	170" (4326)
***Length - ft (mm)**	24'6"(7467)
****EXT. Width - ft (mm)**	8'1"(2463)
INT. Width - ft (mm)	7'5"(2260)
*****EXT. Height Incl. A/C- ft (mm)**	10'3"(3125)
INT. Height - ft (mm)	6'3"(1905)
Fresh Water Tank Cap. - gal (L)	24 (91)
Black Holding Tank Cap. - gal (L)	29 (110)
Grey Holding Tank Cap. - gal (L)	37 (140)
Fuel Cap. - gal (L)	26.4 (100)
Propane Cap. - gal (L)	15 (57)
Exterior Storage Capacity	40 CU. FT.
* Bumper to bumper ** Outside to outside of widest point of body *** Add 3" for Roadtrip Satellite Option	

1. The height of the motorhome is measured from the ground to the top of the highest standard component and is based on the UVW of a typically equipped motorhome. The actual height of your motorhome may vary depending on chassis, equipment, build variations or tire pressures. It is important that you know the actual height of your motorhome.
2. The load capacity of your motorhome is designated by weight, not by volume, so you cannot necessarily use all available space when loading your motorhome.
3. Tank capacities are based on measurements prior to tank installation. Slight variations may occur due to tank shrinkage or expansion.
4. Actual filled propane tank capacity is 80% of listed capacity due to overfilling prevention device on tank.
5. Exterior storage capacity is approximate. Total volume will decrease if motorhome is equipped with a generator.

SAFETY

Safety, comfort and ease of operation are key considerations during the design and manufacture of all Triple E RVs.

It is the responsibility of the owner and operator to read, understand and follow all instructions in this manual, the chassis manual, all appliance/equipment system manuals located in the Motorhome Information Kit, and on safety labels or signs on the motorhome. Specific items, procedures or instructions are identified with the key words Danger, Warning and Caution which emphasize areas of special concern. These key words are defined as follows:

⚠ DANGER

Danger - Indicates a hazardous situation which, if not avoided, WILL result in death or serious injury.

⚠ WARNING

Warning - Indicates a hazardous situation which, if not avoided, COULD result in death or serious personal injury and/or damage to the motorhome.

⚠ CAUTION

Caution - Indicates a hazardous situation which, if not avoided, COULD result in minor or moderate personal injury and/or damage to the motorhome.

⚠ NOTICE

Notice - Identifies hazards not related to personal injury.

The safety symbol, ⚠ used in conjunction with the Danger, Warning and Caution symbols, identifies an area that involves the personal safety of the operator, passengers or bystanders. Read, understand and follow the instructions and information in the safety label or sign or manual. Do not take chances with safety. Most accidents are preventable.

Follow the safety precautions outlined in this section of the manual, but keep in mind that the manual may not cover all situations. Every person who occupies the motorhome or operates any of its components, devices or sub-assemblies must be familiar with this manual and the manuals in the Motorhome Information Kit. Every operator and occupant is responsible for following all safety items covered in this and other manuals.

GENERAL SAFETY

- The most important safety feature on your motorhome is a safe and knowledgeable operator. It is the operator's responsibility to read, understand and follow all the safety and operating instructions in the operator's, chassis, appliance, and system manuals. Most accidents that involve motorhomes are preventable.
- An operator who has not read and understood all operating and safety instructions is not qualified to operate the motorhome.
- Untrained or uninformed operators and occupants expose themselves, passengers and other drivers to possible injury or death, and they subject the motorhome, other vehicles and property to potential damage.
- Do not modify the motorhome in any way. Unauthorized modifications may impair the function and/or safety of the motorhome.
- All driver and passenger seats are equipped with seatbelts. Occupied seats must be locked in the forward facing direction when the motorhome is moving, and passengers may occupy only approved seats with the seatbelt securely fastened. Do not allow any passengers to travel in the motorhome unless they are in an approved seat with the seatbelt secured. Motorhome seats with seatbelts installed by the manufacturer are the only seats approved and safe for travel.
- Always fasten the seatbelt low on the torso and keep it snug to transmit the force from the belt into the hip/pelvic region of the body. Pregnant women should wear a lap/shoulder belt whenever possible. Wear the belt snug and low throughout the pregnancy.
- Establish a monthly fire extinguisher inspection program to ensure the extinguisher is fully charged and in proper working condition. Inspect the extinguisher prior to each time you operate or occupy the motorhome.

ALARMS

All models are equipped with a combination LP gas, carbon monoxide, and smoke alarm as standard safety equipment.

⚠ CAUTION

Recurring alarms indicate the slow accumulation of LP gas, carbon monoxide or smoke and may warn of low battery levels. Have an authorized service center check the system and identify the source of the alarm. Correct the problem before using the motorhome. Keep all alarms in good working order. For detailed information, refer to the alarm manuals provided in the Motorhome Information Kit.

COMBINATION CARBON MONOXIDE / LP GAS ALARM

The Combination Carbon Monoxide/Liquid Propane Alarm ① location can be found on the floorplan for your particular motorhome.

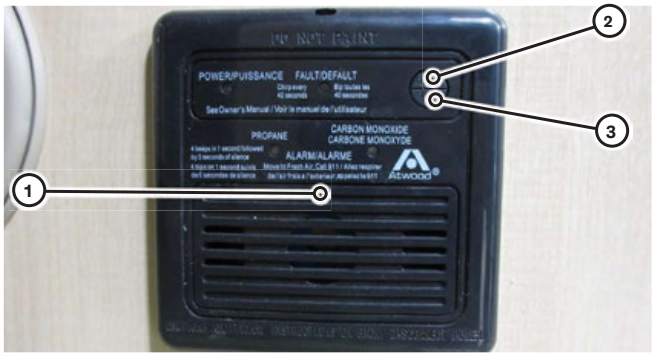

The LP alarm sounds whenever there is an unsafe amount of LP gas in the motorhome. If the LP gas monitor sounds an alarm, follow these steps:

6. Follow instructions on the safety sign next to the stove and air out the vehicle and press the “Reset” button ② to silence the alarm.
7. Have a qualified service center find the leak and correct the problem before using the motorhome.
8. Refer to the “Liquid Propane Gas System” section in this manual and LP Gas Alarm owner’s manual located in the Motorhome Information Kit for further details.
9. Test the CO/LP gas alarm before each trip by depressing the test button ③. Test the CO/LP alarm after removing the motorhome from storage, before each trip and weekly thereafter.

⚠ WARNING

If you smell gas, immediately follow these steps:

1. **Extinguish open flames, pilot lights and all smoking materials.**
2. **Do not touch any electrical switches.**
3. **Shut off the LP gas tank valve.**
4. **Open doors, windows and roof vents after making sure the roof vent fans are “OFF”.**
5. **Leave the motorhome and its immediate vicinity until odor is gone.**
6. **Have a qualified service technician check the system for leaks and make any necessary corrections and repairs.**

NOTE: Do NOT remove the label from the glass stove top cover.

⚠ DANGER

Carbone Monoxide is a colorless and odorless gas that is lethal to humans and pets.

Do not breathe heating or cooking fumes or engine exhaust to prevent asphyxiation.

VISUAL AND AUDIBLE ALARM SIGNALS

This Atwood™ CO/Propane Gas Alarm is designed to be easy to operate. The alarm has four indicator lights that display a specific color for each monitored condition. There is also a distinct sound pattern for each alarm condition.

CO ALARM

The Red CO LED will flash and the alarm will sound 4 “beeps” then will become silent for 5 seconds. These signals indicate that the CO is at a dangerously high level. Immediate action is required. See procedure and warning information at start of “Combination Carbon Monoxide/LP Gas Alarm” section for procedures in the event of an alarm. This alarm cycle will continue until the Reset button on the front of the alarm is pressed. Ventilate the RV. The RED light will stay ON until the CO has cleared, or the alarm will reactivate in approximately 6 minutes if the CO is still present. Do not re-enter the

RV. This alarm will cease and return to normal operation after the RV is properly ventilated.

PROPANE GAS ALARM

The Red Gas LED will Flash and the alarm will sound 6 “beeps” then will become silent for 5 seconds whenever a dangerous level of propane gas is detected. Immediate action is required. See procedure and warning information at start of “Combination Carbon Monoxide/LP Gas Alarm” section for procedures in the event of an alarm. The detector will continue to alarm until the Test/Mute button on the front of the alarm is pressed. Ventilate the RV. The RED Gas LED will continue to flash until the gas has cleared, or the gas alarm will reactivate in approximately 6 minutes if the gas is still present. Do not re-enter the RV. This alarm will cease and return to normal operation after the RV is properly ventilated.

MALFUNCTION/SERVICE SIGNAL

If any malfunction is detected,the LP or C.O lights will flash depending on which alarm is malfunctioning and the alarm will sound (refer to the table for the corresponding audible signal.) Press the Test/Mute button. If the Test/Mute button does not clear the alarm, check the coach battery voltage. If the battery voltage is not low and the unit will not return to normal operation, immediately remove the alarm and return for service or warranty replacement. See the warranty section in this manual.

⚠ WARNING

Use of the motorhome is not recommended without a working CO/LP Gas detector installed.

OPERATION	AUDIBLE SIGNAL	VISUAL SIGNAL
Normal	None	Steady Green
C.O. Alarm	4 beeps 5 seconds off	Steady red C.O light
Propane Alarm	6 beeps 5 seconds off	Steady red LP Light
Alarm Malfunction	Beep every 40 seconds	Flashing LP or C.O. light
End of Life	Beep every 20-30 seconds	Steady LP and CO light
Warm-Up Cycle	No sound	Flashing green

⚠ WARNING

Test this alarms operation after each storage period, before each trip and at least once per week during use.

FUEL AND PROPANE SAFETY

⚠ DANGER

Turn off all pilot lights, appliances, and appliance igniters before refueling motorhome diesel or propane tanks. Failure to comply could result in death or serious injury.

⚠ DANGER

Never use a flame to check for LP gas leaks.

⚠ WARNING

Do NOT place or store gasoline, propane or any other flammable liquids on board the motorhome, because fire or explosion may result. Failure to comply could result in serious injury or death.

Propane containers are equipped with safety valves that relieve excess pressure by discharging explosive gas into the atmosphere.

SMOKE ALARM

The smoke alarm ① sounds whenever there is an unsafe amount of smoke in the motorhome. Always open the roof vent before cooking.



- Open doors, windows and roof vents to air out motorhome and silence the alarm. Identify and eliminate the source of the smoke.
- Replace the battery at least once per year, and test the battery after replacement. Remove the cover to replace the battery.
- Clean and vacuum opening on smoke alarm once a month.

⚠ WARNING

Do not remove the battery to silence the alarm. If the alarm "beeps" every minute, the battery is weak and requires replacement. Do not allow the battery to go dead. Use only recommended replacement batteries (see Smoke Detector operator's manual in Motorhome Information Kit for detailed instructions).

- Test the smoke alarm before each trip by depressing the test button ②. Test the smoke alarm after removing the motorhome from storage, before each trip and weekly thereafter. Test the smoke alarm sensor by blowing smoke (from a safe, fire-free source) past the sensor. If the alarm does not sound, identify and correct the source of the problem or replace the smoke alarm.
- Make sure the wires are properly connected to the device battery. Position and close cover.
- If you suspect the smoke alarm is not functioning properly, replace the alarm - do NOT attempt to repair it.

⚠ NOTICE

Smoke alarms are not perfect and do not respond in all situations. The best safeguard is fire prevention.

FIRE PREVENTION

Fires can start in a variety of ways including, but not limited to, smoking, malfunctioning appliances or equipment, placing flammable materials on hot surfaces, etc. It is best to prevent fires, but be prepared to extinguish a fire if necessary. Review the following sections with all operators and occupants on a regular basis.

⚠ CAUTION

Any exterior heat source (BBQs, space heaters, etc.) must be positioned away from the sidewall and directed away from the motorhome.

FIRE SAFETY TIPS

1. Establish and maintain good housekeeping practices. Never allow combustible materials to accumulate in or around the motorhome.
2. Store flammable liquids in approved containers in a well-ventilated space.
3. Have fully charged fire extinguishers readily available.
4. Avoid using flammable products in the motorhome.
5. Never smoke in bed or when relaxing on the couch.
6. Do not overload electrical outlets.
7. Do not leave food unattended while cooking.
8. Keep children away from electrical outlets and LP gas controls.
9. If there is a fire, evacuate everyone from the motorhome. Use your fire extinguisher if safe to do so, and close all LP gas valves if possible. Call the fire department and stay a safe distance away from the motorhome. Do not re-enter the motorhome until the fire officials declare that it's safe.

EMERGENCY ESCAPE

EGRESS WINDOWS

Use the side entry doors or rear emergency egress window exit as emergency escape routes. Escape routes are easily identified by the exit decals.

To open the rear emergency egress window exit, pull up the two handles ③, and push out the window.

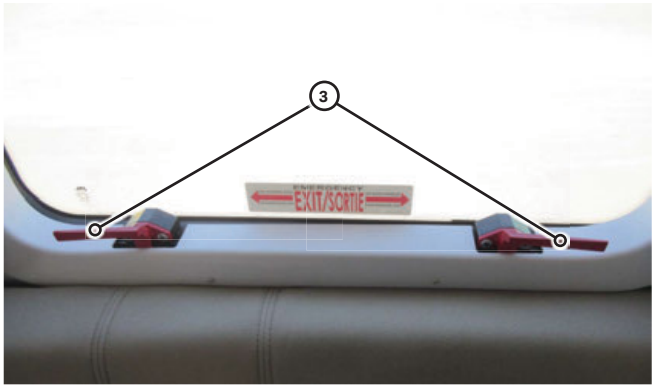

FIRE EXTINGUISHER

The fire extinguisher is located at the motorhome entrance. In case of fire, use the following PASS method to extinguish the flames:

1. **Pull**
2. **Aim**
3. **Squeeze**
4. **Sweep**



⚠ WARNING

Stay a safe distance from the fire and near an exit. Stay close to the floor to avoid heat and fumes. The chemical from the fire extinguisher will shoot at least 10 feet (3 m).

OPERATION

1. Pull the safety pin and grasp the fire extinguisher firmly while holding it in an upright position.
2. Aim the fire extinguisher nozzle at the base of the fire. Do NOT spray at the smoke or flames.
3. Squeeze the handle to release the extinguishing agent.
4. Sweep the fire extinguisher from side to side until the fire appears to be out.

⚠ WARNING

After the fire is out, beware of flashback. Flashback occurs when flammable vapors from combustible liquids spread back to the ignition source and reignite the fire.

5. Once the fire is completely extinguished, discharge the fire extinguisher entirely and get it recharged or replaced immediately. For detailed information, refer to the fire extinguisher manual provided in the Motorhome Information Kit.

⚠ WARNING

Use of the motorhome is not recommended without a working fire extinguisher installed.

FUNCTION

Fire extinguishers are designed to put out a fire in its initial stages. Once you cannot get within 10 feet (3 m) of the fire, it is out of control and too big to fight with your extinguisher.

Do not discharge your fire extinguisher to test it. Once it is discharged, even for a few seconds, it will lose pressure and become useless.

Periodically check the pressure gauge ① on your fire extinguisher. If it loses pressure, the dry chemical will not effectively discharge. Do not operate or occupy the motorhome without a fully charged fire extinguisher.



⚠ NOTICE

If the pointer on the pressure gauge ① is not in the operating range (pointer in the green portion of the gauge), immediately replace the extinguisher. Record the inspection date on the tag provided.

MOTORHOME OPERATION

MOTORHOME PREPARATION

Before beginning an extended trip, ensure you are thoroughly familiar with your motorhome's condition, components, features, appliances and limitations. Take ample time to read the operator's manual and the material in the Motor Information Kit, and ensure you understand the operation of all the components.

Adequate preparation is essential for an enjoyable and successful trip. Your motorhome provides the freedom to do what you want, where you want and when you want. The time you spend getting to know your motorhome will enhance your enjoyment, maximize your experience and contribute to a more successful trip.

MOTORHOME LOADING AND WEIGHTS

The components of your motorhome are designed to perform if the motorhome is not loaded in excess of the Gross Vehicle Weight Rating (GVWR), the maximum front and rear Gross Axle Weight Rating (GAWR) or the Gross Combined Weight Rating (GCWR). These ratings are listed on the Canada and U.S. Department of Transport labels located on the driver's pedestal behind the skirting.

The GVWR is the maximum permissible weight of the fully loaded motorhome.

The Unloaded Vehicle Weight (UVW) is the weight of your motorhome as manufactured at the factory with full fuel, engine oil and coolants.

The Cargo Carrying Capacity (CCC) (Canada) is equal to the GVWR minus each of the following: UVW, full fresh (potable) water weight (including water heater), full LP gas weight, and Sleeping Capacity Weight Rating (SCWR).

The Occupant and Cargo Carrying Capacity (OCCC) is equal to the GVWR, minus UVW, plus full LP gas weight. In other words, OCCC is the amount of weight in occupants, cargo, water, and trailer tongue weight that can be added to the motorhome without exceeding the GVWR. Refer to the Certification Labels Samples section on page 7 for visual appearance and relevant locations in the motorhome

The Gross Combination Weight Rating (GCWR) is the maximum allowable loaded weight of the motorhome and any towed vehicle.

The Gross Axle Weight Rating (GAWR) is the value specified as the load carrying capacity of a single axle system, as measured at the tire-ground interface.

To determine that your motorhome is properly loaded, drive the fully loaded vehicle to a scale and weigh as follows:

1. Drive only the front wheels onto the scale to obtain the front gross axle weight.
2. Next, place the entire vehicle (both axles) onto the scale to obtain the gross vehicle weight.
3. Drive forward until only the rear wheels are on the scale, and obtain the rear gross axle weight.
4. To obtain the corner weight for your motorhome, drive each tire individually onto the scale and record the weight.

Compare the gross vehicle weight with the GVWR on the label. If the gross vehicle weight exceeds the GVWR, you must reduce the total vehicle load. If the gross vehicle weight is less than the GVWR on the label, check the front and rear gross axle weights against the front and rear GAWRs on the label. If either axle weight exceeds the GAWR for that axle, redistribute the load to ensure that loads on front and rear axles are within the required limits.

Load heavier items as centrally and as low as possible. Store lighter items in cabinets, closets and drawers. Secure luggage or similar cargo inside your motorhome to prevent it from shifting and causing damage or injury.

⚠ CAUTION

Total vehicle load must NOT exceed the maximum GVWR/GAWR/GCWR of the chassis.

TOWING

Towing a trailer can affect the handling, durability, performance and fuel economy of your motorhome. The factory-installed class III towing hitch is rated as follows:

A. 500 lb (227 kg) - maximum hitch or tongue weight
B. 5000 lb (2270 kg) - maximum trailer weight.

The combined weight of the motorhome and any towed vehicle must not exceed the Gross Combined Weight Rating (GCWR). Also, the combined weight of the motorhome and any towed vehicle hitch weight must not exceed the motorhome's Gross Vehicle Weight Rating (GVWR) or its rear Gross Axle Weight Rating (GAWR) as listed on the vehicle certification label.

To ensure the correct weight balance, take your loaded motorhome to a weigh scale to determine the actual weight distribution. After you have done this once, you will have a better understanding about how to load your vehicle in the future.

Remember, your motorhome will handle differently when towing a trailer, and stopping distances will be longer. Make sure your trailer is equipped with a braking system and is properly connected to your motorhome.

When descending a steep or long grade, reduce speed and shift to a lower gear to control speed. Avoid prolonged or frequent application of brakes to prevent overheating and possible brake system failure. Refer to the chassis manual in the Motorhome Information Kit for further information.

AUXILIARY VEHICLE TOWING

If you are planning to tow another vehicle or a trailer with your motorhome, contact your local department of transportation for towing information.

⚠ CAUTION

For safe towing and vehicle handling, maintain proper motorhome and trailer weight distribution. The total weight of the motorhome and the towed vehicle must not exceed the GCVW rating as stated on the vehicle certification label.

It is the responsibility of the operator to ensure that motorhome loading specifications and limits are not exceeded. Always weigh and reload if required. Keep all frame members level or the tow hitch angled slightly upward for the best results. Be familiar with and comply with all applicable laws and regulations.

Always provide lights on the towed vehicle by connecting to the 7-pin plug on the rear of the motorhome. This plug will provide power to the lights for brakes, flashers, turn signals and running lights.



PRE-TRIP INSPECTION

1. Ensure the motorhome and all of its components, devices, systems and subsystems are serviced and ready for travel.
2. Inspect wheel lugs for tightness. Examine tires for signs of damage and wear. Ensure that all tires are properly inflated.
3. Check All Fluids:
   - Engine/crankcase oil
   - Power steering fluid
   - Radiator recovery system
   - Battery electrolyte level
   - Windshield washer reservoir
   - Diesel exhaust fluid (DEF)
4. Check the oil level in the generator power plant (if installed). Refer to the generator instruction and maintenance manual located in the Motorhome Information Kit for details on pre-use requirements.
5. Consult the chassis manual in the Motorhome Information Kit for a list of pre-trip inspection requirements.
6. Verify that all lights are in working order.
7. Check the engine compartment for wildlife.

⚠ NOTICE

Wildlife and pets like the warmth of the engine compartment and can become entangled in the moving engine components.

8. Sanitize and fill the fresh water tank if required. Turn off the water pump unless using water. Turn off the water pump if leaving the unit unattended for an extended period of time. (Refer to the "System Monitor" section in the "Electrical System Operation" section for details.)
9. Start the refrigerator a day ahead of time so it will be cold for your trip.
10. Fill the LP gas tank to a maximum of 80% of its capacity. Be careful not to overfill the LP gas tank. An overfilled LP gas tank will cause the gas regulator to fail, and may result in problems with LP gas components. Turn off the LP gas valve control located in the utility center. Make sure all LP gas controls are turned off (furnace, stove top and refrigerator). Check for LP gas leaks regularly using soapy water.

⚠ DANGER

Turn off all appliances while refueling any motorhome or LP gas tanks. Do NOT smoke while refueling.

11. Check that sewer connections are properly stored and all external compartments and filler openings are closed and/or locked.
12. Ensure the roof vent opens and closes.
13. Be sure that all doors are closed and latched with travel locks in place, and ensure all loose objects are secured including cabinet and refrigerator contents.
14. Deodorize the waste holding tank. (Refer to the "Black Water Waste Holding Tank" section in the "Water and Plumbing System" section for details.)
15. Check that all blocks and chocks are removed and stowed.
16. Check that there are no obstructions in the motorhome's pathway before moving. Ensure there is proper clearance between adjacent and overhead objects to prevent making contact.
17. Disconnect and stow the shoreline power cord (Refer to details in this section).
18. Lock exterior compartment doors.
19. Check that the fire extinguisher is in good condition and fully charged. (Refer to the "Safety" section for details.)

EMERGENCY EQUIPMENT CHECKLIST

The following list describes the minimum amount of emergency equipment required, but additional items may be appropriate for your specific personal needs:

1. First aid kit
2. Emergency flares
3. Toolbox and tools
4. Plastic bucket
5. Tow rope or chain
6. Wheel blocks or jacks
7. Water hose
8. Electrical cord extension
9. Fire extinguisher

FINAL CHECKS

1. Secure all objects in the motorhome. Tie, latch or lock all loose objects as appropriate.

⚠ CAUTION

Unsecured objects can become dangerous projectiles in a sudden maneuver or accident.

2. Securely close and lock all doors to minimize the chance of a door coming open in an accident.
3. Adjust all rear-view mirrors to provide the best rearward visibility.
4. Set the driver's seat to provide the desired leg to pedal spacing for your personal comfort.
5. Fasten seatbelts, position low on the torso, and ensure they are snug. All passengers must be in a seat that is equipped with a seatbelt. All pregnant riders should be in a seat equipped with a shoulder strap for maximum safety.
6. Strap small children into a rear-facing car seat. Refer to the "Child Restraints" section for details.
7. Do NOT carry any passengers unless they are in a seat that is equipped with a seatbelt and the seatbelt is properly fastened.

MAXIMUM OCCUPANCY

The belted seating positions in your motorhome may be different than the stated sleeping capacity. This is referred to as the Occupant and Cargo Carrying Capacity (OCCC) in the U.S. or the Cargo Carrying Capacity (CCC) in Canada.

Triple E RV uses belted seating positions to determine the OCCC or CCC. You may use all the belted seating positions available in your motorhome, provided you stay within the GVWR listed on your vehicle certification label.

⚠ WARNING

All occupants must be in seats equipped with lap or shoulder harness seatbelts with the seatbelt fastened when the motorhome is in motion. Small children must always be placed in a certified child restraint system and secured with a seatbelt

SEAT/SHOULDER BELTS

Every occupant must be seated in an approved seat with the seatbelt properly fastened whenever the motorhome is in motion. Accident statistics prove the importance of using seatbelts. Vehicle occupants not seated in an approved seat and restrained with a seatbelt are likely to suffer more serious injuries than those who are properly restrained.

LAP/SHOULDER BELTS

The driver and passenger seats are equipped with a combination lap and shoulder belt ① for maximum restraint.



LAP BELTS

The dinette is equipped with lap belts ②. Never allow occupants to travel in a seat that is not equipped with a lap or shoulder belt.



PREGNANCY

Pregnant occupants of the motorhome should wear the lap belts low on their torso and should position the shoulder strap diagonally across their chest. Do not position the shoulder strap against the neck. Wearing a seat or shoulder/lap belt properly will protect both the mother and the unborn child.

CHILD RESTRAINTS

Child restraint systems are legally required in many jurisdictions in North America. Statistics prove that children not secured with a certified and appropriately sized child restraint system experience more severe injuries than those who are properly restrained. The National Highway Traffic Safety Administration (and Canadian equivalent), mandates anchors and tethers for child restraint systems in passenger vehicles, but these NHTSA rules do NOT apply to your motorhome. Therefore, your motorhome is not equipped with any anchor or tether restraint system for use with child restraint seats. In evaluating and providing the safest conditions for your young passengers, you must take into account the following considerations:

1. Familiarize yourself with the laws and regulations of all states and provinces in which you will use the motorhome. Laws governing the transport of children and the use of child restraint and anchor systems vary in different jurisdictions.

⚠ CAUTION

Placing a child or child restraint system in a rear-facing or side-facing seat is not safe under any circumstances.

2. In accordance with applicable law, your motorhome is not equipped with any anchor or tether system on any of its forward facing seats.
3. Obtain a child restraint that is labeled as certified to comply with all applicable U.S. and Canadian laws, rules and regulations applicable to child car seat, harness, anchor and/or tethering systems before allowing any child to travel in your motorhome.
4. Ensure that any child restraint system you use conveniently and safely attaches to the structural elements of your motorhome and provides safety for a child every time it is used.
5. Ensure that your child restraint system is suitable and adequate for your child's age, weight and height. Check your child's restraint system instructions and labels to verify that it is suitable and adequate.
6. Carefully review the labels and instructions supplied with your child restraint system and correctly and appropriately install your child restraint system in accordance with the labels and instructions and all applicable laws and regulations.
7. If anchors or tethers are required for the safe or legal use of your child restraint system or for your child's age, weight and height, you may have a difficult time safely transporting a child in the motorhome, because no anchors or tethers are installed on your motorhome as manufactured.

DRIVER/PASSENGER SEAT CONTROLS

SWIVEL FUNCTION

1. To activate the swivel function of a seat, push the door control seat switch ① forward to slide the seat forward. It is essential that the seat is moved forward to prevent damage to the door panel and post when swiveling the seat.



2. Move armrest ② into upright position.



⚠ WARNING

All seatbelts retractors are equipped with locks that engage when the belt extends too quickly. Move the spade end of the seatbelt slowly and steadily across your body when fastening to prevent the lock from engaging. If the belt locks while extending, release the tension and allow it to retract fully. Then pull out to fasten.

3. Pull the swivel lock lever ③ (located near the base of the seat) to the left, and swivel the seat slowly toward the center line of the motorhome to prevent damage to the seat, door panel and post.



⚠ CAUTION

Swivel must be locked in the forward facing position when vehicle is in motion. Always open door slightly, and swivel driver's seat clockwise, or swivel passenger's seat counterclockwise.

LUMBAR SUPPORT

Use the lumbar support controls ④ to adjust the support to suit your comfort needs.

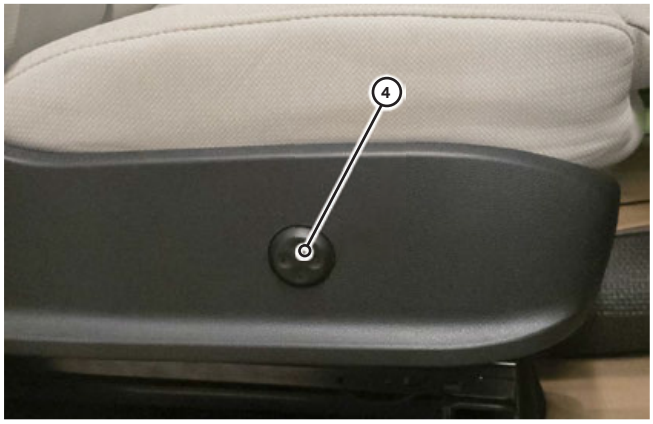

BACK REST ADJUSTMENT

Slide the back rest adjustment button ⑤ forward or backward to adjust the angle of the seat back.

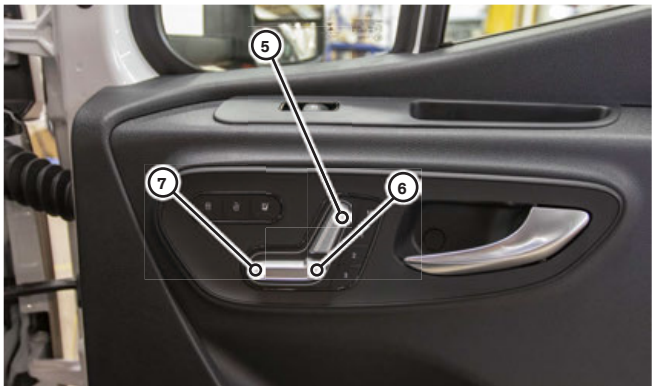

SEAT HEIGHT ADJUSTMENT

To raise the seat height, push the button ⑥ upwards until the desired height is reached. To lower the seat height, push the button ⑥ downwards until the desired height is reached.

SEAT CUSHION HEIGHT ADJUSTMENT

To raise only the seat cushion without raising the entire seat, push the seat cushion height adjustment button ⑦ up or down to adjust the height of the seat cushion.

TRAVELING

Refer to the chassis manual in the Motorhome Information Kit for engine starting, operation and stopping instructions.

DRIVING CHARACTERISTICS

CONTROLS

Your motorhome driver controls are similar to those of an automobile. Steering and braking controls are power assisted to help make driving as comfortable as possible. Your motorhome is much higher, wider and heavier than any automobile so the operator must anticipate and account for the differences.

GENERAL HANDLING

The motorhome power-to-weight ratio is lower than that of the average automobile. It is essential to compensate for slower acceleration when moving into traffic or when passing another vehicle. Allow extra room to corner and to change lanes. When going underneath a bridge or similar overhang, you must be aware of your maximum height. (Measurement must include the air conditioner plus 6 in. (152 mm). Height may vary depending on chassis, make, suspension, tire pressure, roof loads and air conditioner.)

HIGH WIND HANDLING

High winds or strong wind gusts may lead to unpredictable handling and motorhome control.
When encountering high winds or strong wind gusts, proceed as follows:

- Slow down significantly so you can maintain control of your motorhome.
- Find a safe place to pull of the road and take shelter.
- Park your motorhome facing directly into the wind to minimize high wind buffeting.

MOUNTAIN DRIVING

When driving in hilly or mountainous terrain, exercise safe driving techniques that match terrain conditions.

CLIMBING A HILL

The transmission of your motorhome is designed to automatically down-shift when required during long, uphill climbs. If the transmission frequently shifts up and down, select a lower gear for the duration of the climb to prevent repeated shifting. This will prevent unnecessary wear and tear on the transmission.

DESCENDING A HILL

Select a lower transmission gear when descending a hill to avoid prolonged brake applications. Under extreme conditions, prolonged brake applications could lead to excessive brake wear, overheating and failure causing you to lose control of the motorhome

⚠ CAUTION

Extended brake applications can cause excessive wear, overheating and under extreme conditions, brake failure that could cause you to lose control of the motorhome.

⚠ NOTICE

A safe driving practice is to use the same lower gear position when descending a hill that you used while climbing the hill.

⚠ NOTICE

Carefully observe the engine temperature, especially during long climbs. If you notice overheating, pull off the road and allow the engine to fully cool before continuing. Refer to the chassis manual in the Motorhome Information Kit for instructions on filling the engine cooling system of your motorhome.

DRIVING SAFETY TIPS

1. When backing the motorhome, have a person stand to the rear on the driver's side to guide you.
2. Before departing on a trip, check your routes for height restrictions. Remember, some tunnels prohibit motorhomes with LP Gas systems.
3. While traveling, make sure all occupants correctly use their seatbelts.
4. While traveling, make sure all doors are closed and that cabinets, drawers and loose objects are secure.
5. Instruct your family about what to do in case of fire and periodically hold fire drills.
6. Maintain a properly charged fire extinguisher.
7. Ensure LP Gas and smoke detectors are unobstructed and in proper working order at all times.
8. Keep a well-stocked first aid kit on board the motorhome.
9. Check tires often while traveling. Make it a habit to check tire pressures before each trip and each time you refuel.
10. If you have a cellular phone, carry it with you for emergencies. Do not text or use the phone while driving.
    - Do not drink and drive. Do not allow others to do so.
    - Do not text and drive.
    - Do not use a cell phone while driving. Always use a hands-free system while driving.

TRAVEL TIPS

As you travel with your motorhome, you will learn a great deal from your own experiences. Share your experience with other motorhome owners and learn from them as well. Read RV, outdoor and camping magazines for camping and travel tips. The following basic suggestions also may make your travel and camping easier and more enjoyable:

1. Make sure all compartment, refrigerator and freezer doors are closed securely. Carefully open these doors after traveling. Contents may have shifted while traveling and may fall when you open the door.
2. Know the height and width of your motorhome, and allow for adequate clearance.
3. Use your mirrors while driving to determine whether

you are crowding the center line or the outside edge of the highway. Remember, your motorhome requires a much different driving style than your family car.

4. When towing a vehicle, make sure the combined weight of the towed vehicle does not exceed the GCWR as stated on the vehicle certification label located on the passenger door frame (US models only).
5. Check your route carefully before you travel. Some jurisdictions prohibit vehicles with LP Gas containers to drive through highway tunnels.
6. Fill your water tank with clean, fresh potable water only. Do not use a new hose to fill the tank–it may leave a taste of rubber or vinyl.
7. Conserve water, especially when showering. The holding tanks have a limited capacity.
8. Dump sewage only at approved dumping sites.
9. Store all liquids in plastic containers with tight seals.
10. Watch the levels in your holding tanks. Dump regularly to avoid unnecessary buildup and potential odor. After dumping, add water to the black water tank to prevent solids from settling in the tank. Without adequate liquid in the black water tank, dumping can be difficult or impossible.
11. Be careful not to leave odor-causing food or materials in your motorhome for extended periods of time. Make sure wet clothing and towels are fully dried before storing.
12. Make sure your fire extinguisher is ready for use and that you know how to operate it.

SEVERE WEATHER INFORMATION

As a motorhome traveler, you may want to explore new and out-of-the-way places. These recreational areas can be vulnerable to unusual and severe weather conditions. The following suggestions and safety precautions may help you in case you find yourself in severe weather situations.

⚠ NOTICE

All motorhome occupants must be familiar with these safety precautions and should be alert to changing weather.

1. Be alert. Thunderstorms and heavy rains can occur suddenly and unexpectedly. Frequently check weather reports for the area in which you are camping or traveling so you will not be caught unaware of sudden weather changes.
2. Remember the following terms:
   - Weather Watch - Severe weather may develop in your area. Be prepared for an emergency.
   - Weather Warning - Severe weather is occurring or is imminent. Immediately find a safe location.
3. When camping near a body of water, leave plenty of space and elevation between your motorhome and the water.
4. Avoid canyons or dry washes during threatening weather. Prepare an alternate exit, and move to higher ground as soon as it starts raining.
5. If you get caught in a flash flood, do not attempt to move your vehicle. Abandon it, and return only after the water level has subsided. Never attempt to drive through any flooded area.
6. Comply with all warnings and instructions provided by local authorities.
7. Stock enough survival supplies for several days. This should include food, water, first aid supplies and necessary medications.
8. When you leave home, inform someone of your destination and your schedule. Notify the same person if your plans change.

EMERGENCIES WHILE DRIVING

Your motorhome is designed with features that allow the driver and occupants to resolve some emergencies or failures while traveling. Review this section to become familiar with the recommended procedures to resolve these conditions or situations. Review this section with all new drivers and before each trip.

HAZARD WARNING LIGHTS

Your motorhome is equipped with a hazard warning light system. Both the front and rear turn signals flash in unison when the system is turned on. Refer to the chassis manual in the Motorhome Information Kit for additional details and location of the hazard warning lights.

Activate the hazard warning lights whenever the motorhome is stopped on the side of a roadway or near moving traffic. The hazard warning lights alert other motorists of a potential hazard and to take extra care. The system is designed so the lights continue flashing when the switch is on, even if the key is in the off position or removed from the ignition.

FLAT TIRE

If you have a flat tire while operating your motorhome, slow down gradually to prevent loss of control and pull to the shoulder or the side of the road. Stop on a level paved surface and engage the parking brake. Refer to the following steps to change the flat tire:

1. Turn on the hazard warning lights.
2. Place wheel chocks in front and rear of tire located on the opposite side of the flat tire.
3. Immediately contact a qualified roadside repair service, because your motorhome is not equipped with a spare tire.
4. If a roadside service is unavailable, inspect the flat tire to determine whether you can service or repair it.
5. If you can service or repair the flat tire, you must raise the motorhome using the jack.
6. Consult the chassis manual in the Motorhome Information Kit to locate the jack and to determine the proper jack placement locations on the chassis.
7. If the ground is soft or unstable, carefully move the motorhome to a safe location before attempting to lift with the jack.
8. Use a jacking board for stability on loose or soft ground.
9. Raise the motorhome with the jack according to the instructions in the chassis manual.
10. Never allow any portion of anyone's body to be under the vehicle at any time while raising or supporting the motorhome with the jack.
11. Before resuming travel with a new or repaired tire, ensure the lug nuts are tightened in the proper sequence and to the torque specified in the chassis manual. Use a torque wrench to ensure the specified torque is achieved. Recheck and re-torque the wheel lug nuts after 25 and 100 miles (40 and 160 km) of operation.

WHEN THE VEHICLE IS DISABLED

EMERGENCY STARTING

Do not push or tow the motorhome in an attempt to start it. The powertrain is not designed to transmit torque to turn the engine over for starting.

⚠ NOTICE

Attempting to pull or tow the motorhome to start may result in major drivetrain component failure or damage.

JUMP STARTING/BOOSTING

Refer to the chassis manual in the Motorhome Instruction Kit for instructions.

BREAK DOWN

If the motorhome breaks down on the roadway, pull off the road and stop, engage the parking brake, turn on the hazard warning lights and chock the wheels if you are on uneven or unstable ground. Call an approved towing service and provide it with the vehicle make, weight, length, width and height to ensure they dispatch an appropriately sized truck to tow your motorhome to a qualified repair facility.

⚠ WARNING

BATTERY BOOST WARNING: Consult the chassis manual in the Motorhome Information Kit for proper jump starting/boosting procedures.

OVERHEATING

If the engine overheats while driving, follow these steps:

1. Pull to the side of the road and stop immediately.
2. Shut off the engine.

⚠ WARNING

To avoid burns or other injury, allow coolant to cool before removing any cap from a radiator or coolant recovery tank.

3. Check coolant level in the coolant recovery tank. The coolant level should be between the "full" and "add" marks on the tank.
4. If the coolant level is low, proceed as follows:
   - Check for visible leaks from the hose connections, radiator and water pump.
   - Make sure the serpentine or separate water pump belt is tight and the cooling fan is turning.
   - If coolant level is low, add coolant to the recovery tank as soon as possible.
   - If the coolant is leaking, the serpentine or separate water pump belt is loose or broken, or the red warning light stays on, do NOT start the engine until the problem is corrected.
5. Once the temperature gauge returns to normal, resume driving and keep an eye on the gauge. Do NOT resume driving until the problem has been corrected and the temperature has returned to normal.

PARKING

PARKING

You can stop and park your motorhome much like an automobile; however, always remember that the unit is longer, wider and higher than a typical automobile and requires more room and clearance.

⚠ NOTICE

Always set the parking brake and place wheel chocks in front and rear of wheels to prevent unexpected movement.

BACKING UP

Using Mirrors

Large mirrors are mounted on both sides of your motorhome to provide rearward visibility for the driver. They do not provide visibility directly behind or on top (clearance) of the unit, however.

USING SPOTTERS

For best results, have another person help guide the driver while backing. The driver and spotter should agree to the meaning of hand signals before starting the backing process. The spotter should always be in a position that is visible to the driver while backing

⚠ CAUTION

The rear view camera is only an aid. It cannot replace your own awareness of the immediate surroundings. You are responsible for safe parking. When parking and pulling away, make sure that there are no persons, animals or objects in the maneuvering area. The rear view camera is a visual parking aid only.

BACK-UP MONITORING SYSTEM

Your motorhome is equipped with a rear camera monitoring system. The rear camera ① view will automatically display on the in-dash entertainment system display ② when you shift the vehicle into reverse. For complete operating instructions, refer to the chassis manual in your Motorhome Information Kit.

⚠ CAUTION

Do NOT take your eyes off the road for extended periods of time or a crash causing injury or death could result. Do NOT give extended attention to the in-dash entertainment system while driving.

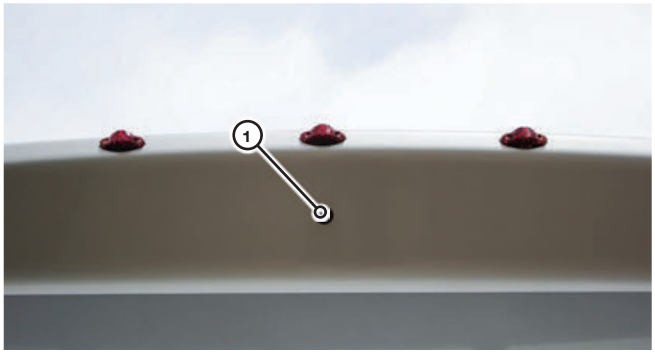



EXTENDED OCCUPANCY

Your motorhome is designed for recreational and short-term occupancy. In case of extended occupancy, there are a few things to keep in mind regarding humidity and condensation. Excessive moisture released inside the motorhome can cause water stains and mildew on the upholstery, wall materials and woodwork. Moisture condensing on the windows is an indication that the humidity inside your motorhome is too high. The following procedures will help to reduce the moisture level inside your motorhome:

1. Open windows and vents. This will allow fresh air to flow through your motorhome and reduce moisture levels.
2. Reduce the amount of moisture released inside the motorhome. Run the bathroom fan when using the bathroom and turn on the roof vent fan while cooking to help remove excessive moisture from your motorhome. Do not hang wet towels or swimwear inside the motorhome to dry.

LEVELING THE MOTORHOME

Level the motorhome frame before using any of the appliances. The refrigerator is especially sensitive and must be level to function properly. Spend the necessary time to level your motorhome to ensure maximum enjoyment and reliability of your appliances. Select the area to park your vehicle as follows:

1. Inspect the area you want to park your motorhome. Select an area that has a firm, prepared surface. Most campgrounds provide this type of parking area for motorhomes.
2. Select an area that is level, or as close to level, as possible.
3. Use a level on the floor to determine the locations where it is necessary to place planks under tires in order to level the motorhome.
4. Level from side to side first, then from front to back. To raise one side of the motorhome, place planks in front of the low side tire, and drive the motorhome forward until the tires are resting on top of the planks.

⚠ CAUTION

Exercise care and caution when parking and leveling your motorhome. Make sure all pets and people, especially children, are clear of the motorhome until leveling is complete and the motorhome is stable.

STABILIZERS

Your motorhome may be equipped with electric stabilizers. The stabilizer control panel ④ is located in the two door wardrobe. Refer to the detailed operating instructions in the Motorhome Information Kit before operating.

NOTE: Refer to the stabilizer system manual in the Motorhome Information Kit for details on manual operation of the stabilizers.



⚠ NOTICE

Always verify that stabilizers are completely retracted before moving the motorhome.

⚠ CAUTION

Use stabilizers to stabilize the motorhome only. Do NOT use stabilizers to level the motorhome.

REFUELING THE VEHICLE CHASSIS

⚠ WARNING

Make sure all LP Gas tanks and appliances are shut off before refueling.

Do not smoke when refueling. Keep flames, sparks and smoking materials away from fuel or flammable fumes.

⚠ CAUTION

Modern fuel systems may allow pressure to build up in the fuel tank during hot weather. Under certain conditions, small amounts of fuel may spray from the fuel filler tube when the fuel cap is removed quickly, creating a potential hazard.

FUEL TANK CAPACITY

Refer to the chassis manual in the Motorhome Information Kit for fuel tank capacities.

FUEL TYPES

Use only ultra-low sulfur diesel fuel. Refer to the chassis manual in the Motorhome Information Kit for details.

⚠ NOTICE

Use the correct fuel type for the motorhome. Using incorrect fuel can be hazardous and can cause significant and costly damage.

REMOVING THE FUEL CAP

The fuel tank filler cap ① is located behind a flap adjacent to the driver's door. Slowly remove the fuel cap to release any built up pressure. If you hear a hissing sound, wait for hissing to stop before fully removing the cap.

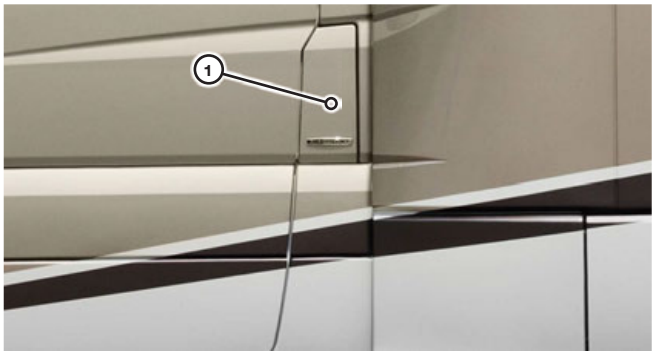

FILLING THE TANK

Do NOT overfill the fuel tank. Fill only until the automatic shut-off valve on the fuel nozzle stops the flow of fuel. This allows for expansion of the fuel and vapor as the fuel warms and expands in the fuel tank.

⚠ NOTICE

Overfilling the fuel tank may cause damage to the fuel evaporative emission system.

⚠ NOTICE

Travel vans for the U.S. market are designed with a fuel line intake for the auxiliary generator that will drain 75% of the fuel from the tank. For the Canadian market, the lines will completely empty the tank meaning there will be no reserve available to get the motorhome to a refueling facility. Take care in running the generator not to use all the fuel in the motorhome.

DOOR LOCKS

Separate keys are required for the ignition switch installed in the chassis and motorhome door locks. You can unlock the motorhome door lock using the key lock ②. There is a manually operated lock ③ on the inside of the coach door. The storage compartments ④ all use the same key.





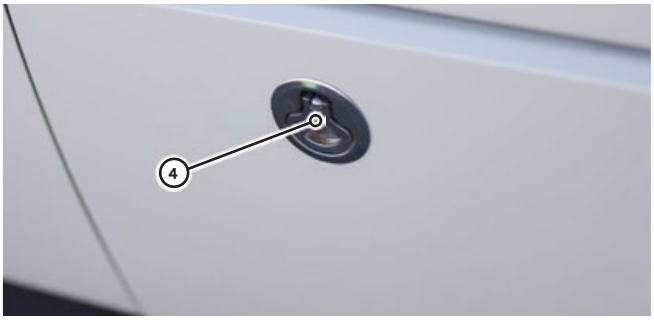

LOCKING AND UNLOCKING PROCEDURES

KEY FOB

Your motorhome chassis entrance doors can be locked/unlocked with the Mercedes Sprinter key fob. Using the key fob press the lock button ⑤ to lock the chassis entrance doors. Press the unlock button ⑥ to unlock the driver's side door. Pressing unlock button ⑥ twice within 2 seconds will unlock both chassis entrance doors.



INSIDE THE MOTORHOME

Your motorhome chassis entrance doors can be locked/unlocked from the inside using the button (7) located under the in-dash entertainment system. Press the button to unlock both chassis entrance doors; press the same button to lock both chassis entrance doors.



KEYS

Keep a record of all key code numbers and keep them in a safe place. Do NOT keep them in your motorhome. Key codes for the chassis can be obtained only through your local authorized Mercedes Sprinter dealer.

Each Serenity coach has 3 keys provided: Mercedes Sprinter chassis key (8), door handle lock (9) and baggage door key (10).

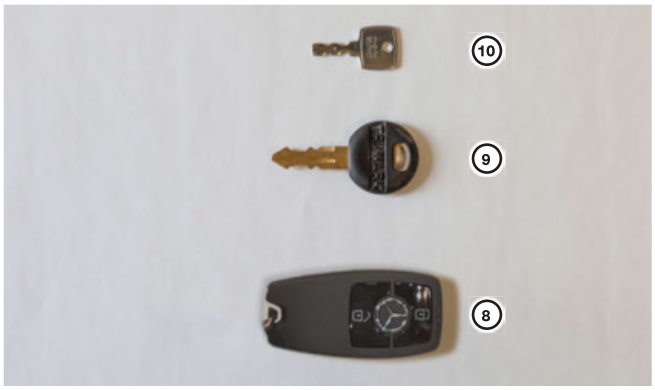

DOOR STRUT

Each motorhome is equipped with a strut (11) to connect between the coach and door. This strut is used to hold the door in the opened position as required for convenience or in windy conditions. Always store the strut in the brackets (12) adjacent to the fire extinguisher (13) located in the coach entry space.

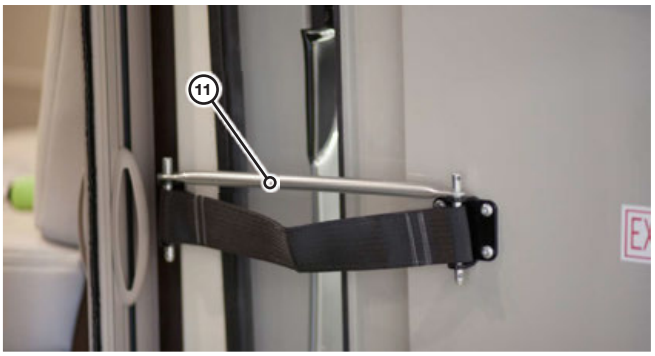



ENTRY DOOR STEP

The entry system is equipped with a magnetic interlock system that activates the lowering and raising of the Entry Door Step when the magnetic field is broken or created between the door ① and chassis ②. When the door is opened, the field is broken and the step is lowered. When the door is closed, the field is completed and the step raises.

In addition, the light on the underside of the step automatically illuminates when you open the coach door.

⚠ WARNING

Ensure the entry door step has fully extended before stepping out of the motorhome.

NOTE: The step light will remain illuminated for five minutes after extending the steps.

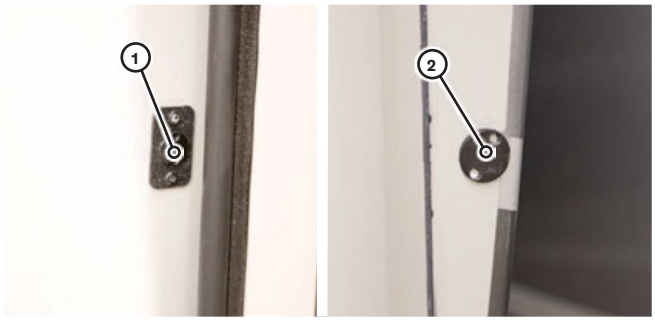

⚠ NOTICE

The entry door step ③ automatically retracts and the step light switches off when you close the coach entrance door and turn vehicle ignition switch to the "ON" position.

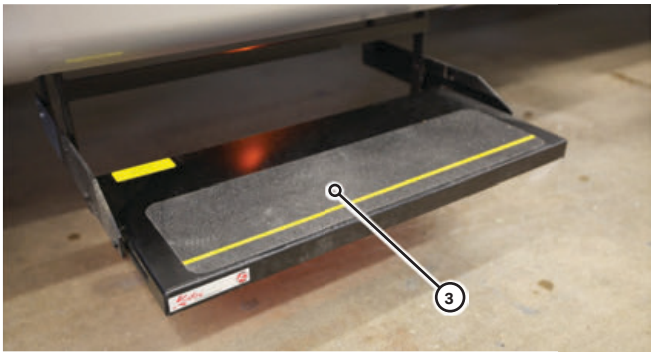

ENTRY STEP ELECTRICAL DIAGRAM

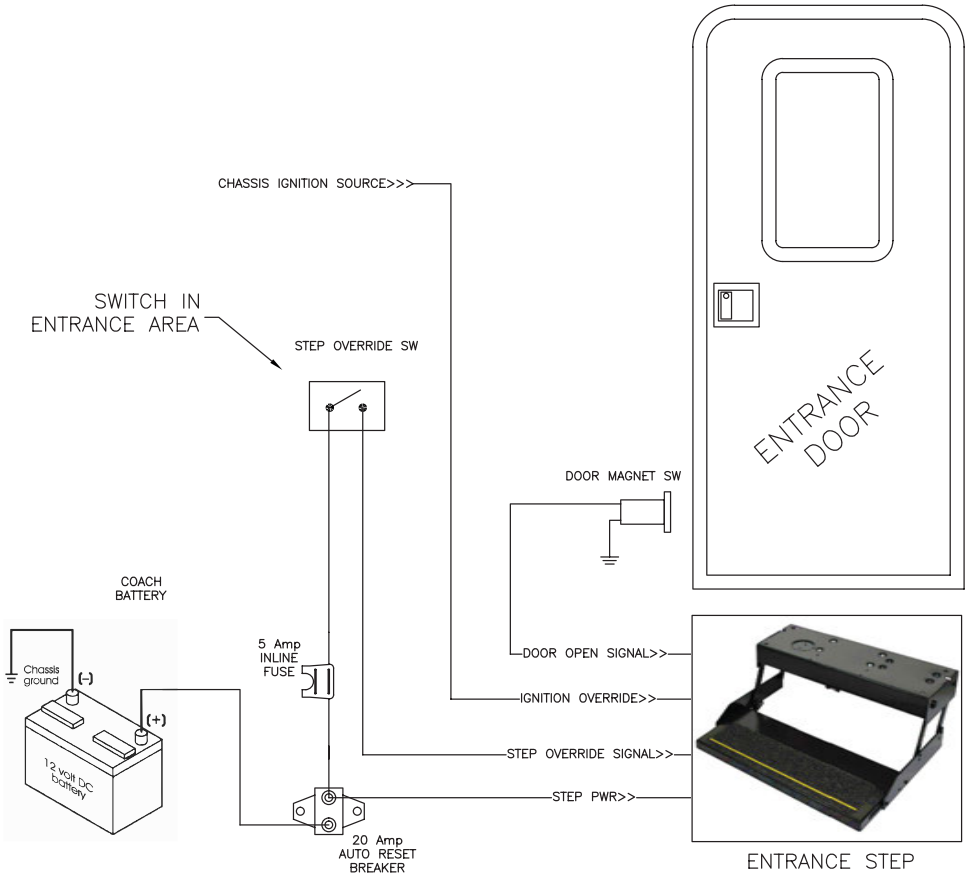

STEP OVERRIDE SWITCH

Depress the top of the step override switch ④, located inside the coach entrance, to prevent the steps from retracting when the coach door is closed.

NOTE: The vehicle ignition switch must be in the "OFF" position for the step override switch to work.

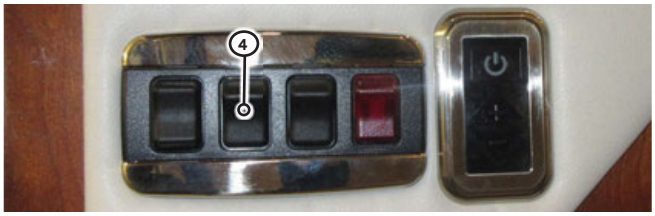

LIGHTING

CAB ENTRY LIGHT

A light ① is located above each cab door and comes on when the door is opened. It lights up the seat and cab area to facilitate entry. When the door is opened, light comes on. When the door is closed, the light goes out. The light is powered by the Mercedes Sprinter chassis system.

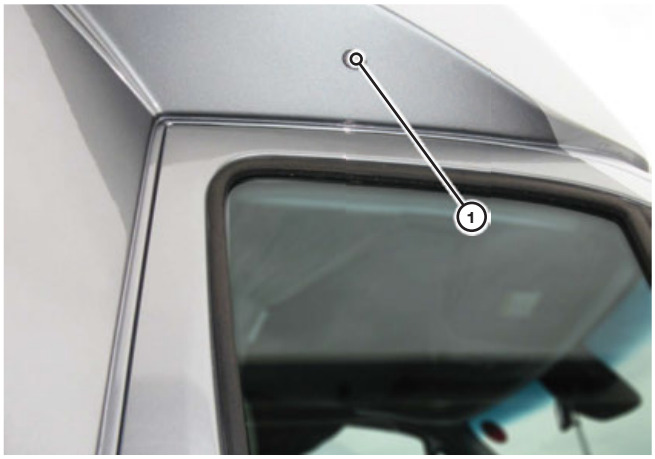

INTERIOR OVERHEAD LIGHT DIMMER SWITCH

Press the main power button ② to turn on the interior ceiling lights. To adjust the lighting, hold either the up or down buttons ③. Pressing the main power button ② a second time will turn off the lights. When powering back on, the lights will be at the previous lighting level when they were turned off.

NOTE: The main power button ② will have a soft blue glow when the power is off .

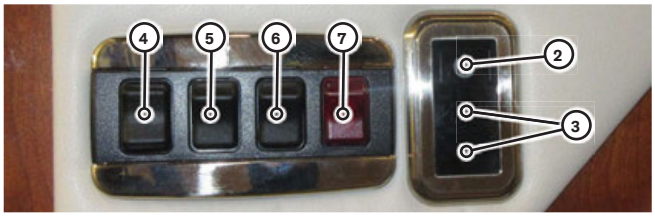

⚠ NOTICE

Turn the battery disconnect switch on to operate all internal 12 volt DC lighting. Refer to the "Electrical System Operation" section in this manual for battery disconnect switch details.

EXTERIOR/INTERIOR LIGHT SWITCHES

Depress the top of switch ④ to turn on the exterior patio lights, center switch to turn off and depress the bottom to turn on assist handle lights and entrance step light. Depress the top of switch ⑥ to turn on the interior accent lights. Depress the top of switch ⑦ to turn on the exterior storage and utility center lights.

NOTE: Depress the top of the step override switch ⑤, located inside the coach entrance, to prevent the steps from retracting when the coach door is closed. (Refer to the "Step Override Switch" section for details.)
Under Cabinet Light Switches

Under cabinet lights ⑧ are controlled by switches ⑨ mounted adjacent to the lights.

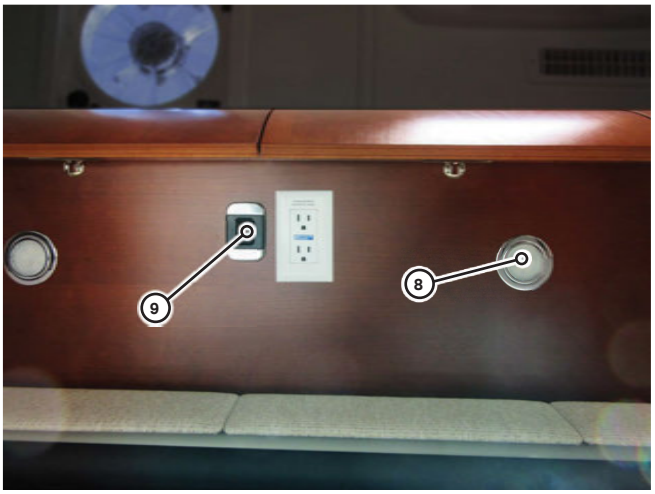

AWNING

EXTENDING THE AWNING

1. Turn the main awning power switch ⑩ located on the passenger side seat base to the "ON" position.
2. Press the bottom section of the awning control switch ⑪ to extend the awning fully.
3. Turn on the awning light ⑫ if desired.

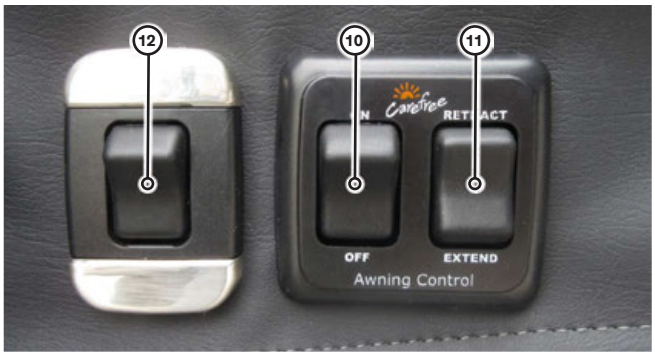

NOTE: The power awning will not operate with the motorhome ignition on. The power awning is equipped with a safety feature preventing the awning from extending while the motorhome ignition is on (driving). This relay (13) is located under the front driver's side dinette.

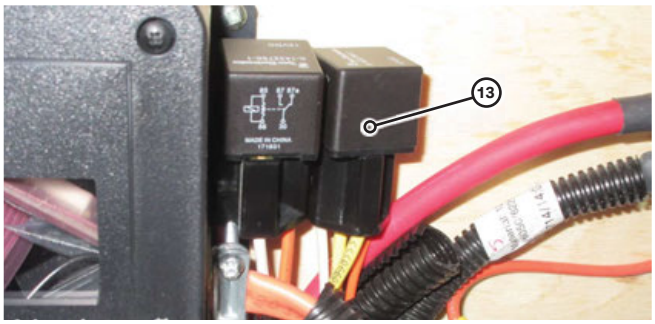

⚠ NOTICE

Awnings are designed to provide shade and protection from the sun. Retract awning if experiencing rain or wind conditions and when leaving unit unattended. Always secure awning in travel position when not in use.

RETRACTING THE AWNING

1. Ensure the main awning power switch (10) located on the passenger side seat base is set to the "ON" position.
2. Press the top section of the awning control switch (11) to retract the awning fully.

AUTO-RETRACT

Your awning is equipped with an auto-retract system that will automatically retract the awning in wind and rain conditions so long as the main awning switch power is set to ON. The system works by sensing movement at the end of the awning, and will retract if a certain movement threshold is surpassed. This includes, but is not limited to: wind gusts, heavy rain, excessive rocking of the motorhome, etc.

NOTE: Do not turn the main awning power switch (10) off while the awning is extended to allow for the auto-retract system to operate as intended.

⚠ CAUTION

Always place the main awning power switch (10) in the "OFF" position when the awning is not used and during transit. This prevents the awning from being accidentally opened.

⚠ CAUTION

Auto-retract systems provide protection against adverse elements; but no auto-retract system is a guarantee against severe or destructive weather; the effects of wind and rain on an awning are unpredictable and may cause severe damage to the awning and/or vehicle. If wind or extended periods of rain are expected, retract the awning.

⚠ DANGER

Keep all sources of heat and flame away from the awning canopy. Fabric is not fire-proof and can burn if left in contact with any flame or heat source.

⚠ CAUTION

The auto-retract system is disabled when the main awning power switch is in the OFF position.

APPLIANCE AND EQUIPMENT OPERATION

Appliances and equipment may vary according to your motorhome model, specifications and floor plan. Refer to the Motorhome Information Kit for operation and maintenance details relating to the specific appliances and equipment installed in your motorhome.

REFRIGERATOR

The refrigerator in your motorhome operates in any one of the following modes:

- 120 volt AC electric (2)
- LP gas with 12 volt DC ignition (3)
- 12 volt DC (4)

⚠ NOTICE

The motorhome MUST be completely level for the refrigerator to operate properly and safely.

⚠ CAUTION

Operating the refrigerator with the motorhome parked on unlevel ground could result in permanent damage to the appliance.

Parking and leveling the motorhome for comfortable living will usually place the refrigerator within satisfactory level limits. Use a level to ensure the motorhome is level.

If the refrigerator is unused for an extended period of time, make sure it is emptied, switched off, defrosted, cleaned and left with the door ajar. Use the travel latch to lock the door in the ajar position.

NOTE: Leaving the door slightly ajar allows air to circulate and prevents the build-up of odor or mold.

⚠ CAUTION

Do not cover or obstruct exterior refrigerator vents.

OPERATING THE REFRIGERATOR

Press and hold the power button (1) for 2 seconds to turn the refrigerator on and off. After the refrigerator has been turned on, press the button (1) and rotate the dial to select between temperature, power source, and settings. Press the button (1) to enter the menu, and rotate the dial again to make your selection, pressing the button (1) again to confirm your choice.



Refer to the refrigerator owner's manual in the Motorhome Information Kit for detailed operating instructions.

NOTE: The refrigerator is self-starting in all operating modes.



⚠ CAUTION

Do NOT store explosive substances in the refrigerator, such as lighter fluid, petrol, ether etc.

REFRIGERATOR OPERATING TIPS

1. Ensure the refrigerator is cold before placing items in it.
2. Allow items to cool before loading the refrigerator. Do not add warm or hot items.
3. Do not pack the refrigerator too full. To operate efficiently, the refrigerator needs air to circulate.
4. Use smaller containers to store items.
5. Use containers that seal tightly.
6. Place crumpled paper between items in the refrigerator to prevent them from rattling while driving.

EXTERIOR REFRIGERATOR COMPARTMENT

The exterior refrigerator compartment, accessible by an exterior door ①, allows access to the rear of the refrigerator for cleaning, inspection, maintenance and service. Keep this compartment clean and free of debris in order to maintain efficient operation of the refrigerator. Remove the exterior door by removing screw ② and pushing up the locking clips ③.

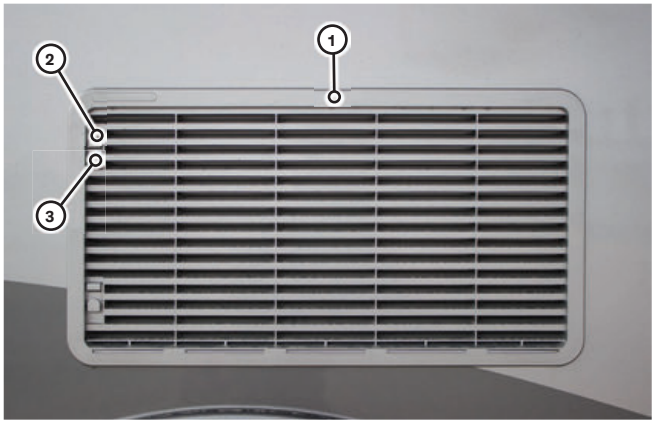

STOVE TOP

The stove top operates on LP Gas. It must be lit manually using the integrated igniter. Ensure the LP gas valve switch ④, located in the utility center, is turned to the "ON" position. Refer to the "Liquid Propane Gas System" section for details.

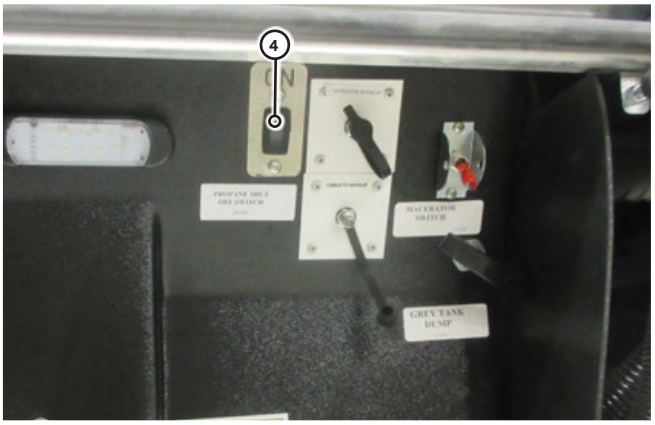

LIGHTING BURNERS

1. Turn on the appropriate burner control knob ⑤.
2. Depress and hold the igniter switch ⑥ until the burner lights.

NOTE: If the igniter fails to operate, check the 1 amp igniter fuse located in the cabinet below the stove top.



3. Do not operate the stove top or the igniter while traveling or while refueling your motorhome. The burners may ignite fumes present during refueling.
4. Do not allow stove top burners to remain lit for an extended period of time without placing cookware above the flame. Overheating the burner grates may cause damage.

5. Turn on the roof vent and open a window to ensure proper ventilation when operating the stove top.
6. Do not remove the warning label on the stove top lid.
7. Do not operate burners with glass stove top lid closed.

⚠ WARNING

Never use the stove top burners to heat the interior of your motorhome. Adhere to the warning labels in the cooking area. Always make sure you have adequate ventilation when operating the burners.

Light the burner immediately after turning on the burner control knob to prevent a gas build-up. Excess gas can cause a flare-up when lit.

MICROWAVE/CONVECTION OVEN

OPERATING THE MICROWAVE/ CONVECTION OVEN

Refer to the microwave/convection oven manual in the Motorhome Information Kit for detailed operating and safety instructions specific to your unit.



MICROWAVE/CONVECTION OVEN OPERATING TIPS

1. Do not attempt to operate the oven with the door open. This may result in harmful exposure to microwave energy.
2. Do not defeat or tamper with the safety interlocks.
3. Do not place any object between the oven front face and the door or allow cleaner residue to accumulate on sealing surfaces.
4. Do not operate the oven if it is damaged. Do not operate the oven if there is damage to the door hinges, latches, seals or sealing surfaces. Do not operate the oven if the door does not close properly or is bent.
5. Do not adjust or repair the oven door. Have the unit serviced by qualified service personnel if necessary.
6. Do not operate the oven when empty.

EXTERIOR BBQ CONNECTION

Your motorhome is equipped with an exterior supply source to furnish LP Gas to your own barbeque (BBQ). The connection point is located at the rear on the passenger side.

OPERATING THE EXTERIOR BBQ CONNECTION

1. Remove protective cover ① from the quick connect fitting ②.
2. Pull the collar of the quick connect fitting back and insert connecting hose to the quick connect fitting ②.

NOTE: Ensure collar is pulled forward once connecting hose is inserted.

3. Turn lever ③ to supply LP Gas to your BBQ.

NOTE: LP Gas supplied to the exterior BBQ connection is regulated; therefore, use only a non-regulated BBQ.

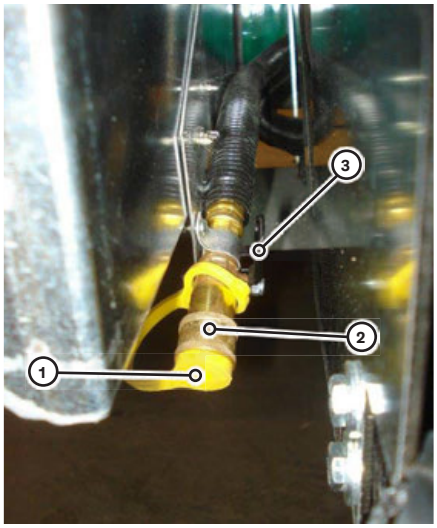

⚠ CAUTION

Any exterior heat source (BBQs, space heaters, etc.) must be positioned away from the sidewall and directed away from the motorhome.

LP GAS FURNACE

OPERATING THE LP GAS FURNACE

The LP Gas furnace is controlled by the single-zone thermostat ④ located in the coach living area.



⚠ WARNING

Before operating the thermostat, carefully read and follow the operating instructions in the LP Gas furnace manual located in the Motorhome Information Kit.

⚠ WARNING

Do NOT operate the furnace while the vehicle is moving.

⚠ CAUTION

Do not cover or obstruct exterior furnace vent.

LP GAS FURNACE OPERATING TIPS

1. Make sure the LP Gas valve switch ⑤, located in the rear utility center, is turned “ON.” Refer to the “Liquid Propane Gas System” section for details.



2. Do not attempt to manually light the furnace. The furnace does not have a pilot light. It is ignited by a direct spark ignition system.

NOTE: Press the °F/°C button ⑤ to switch between °F and °C.

3. If the burner fails to light, check the LP Gas level at the system monitor panel to ensure there is LP Gas in your tank. Refer to the "Liquid Propane Gas System" section for details.
4. If there is LP Gas in the tank and the burner fails to ignite, verify that the LP Gas valve switch ⑤ is in the "ON" position.
5. If there is LP Gas in the tank and the LP Gas valve switch ⑤ is on, but the furnace still fails to light, turn off the thermostat ④, turn off the LP gas valve switch and contact your dealer or a local RV service center.

⚠ NOTICE

Ensure the thermostat fan is set to "AUTO" mode before turning on heat.

DOMETIC COMFORT CONTROL CENTER

OPERATING THE THERMOSTAT

1. To turn ON, depress power button and select mode.
2. To turn OFF, depress power button.

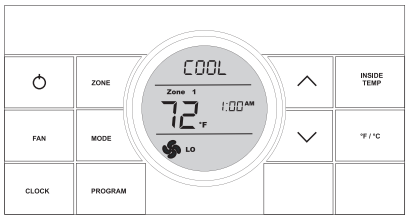

Refer to Dometic Comfort Control Center manual in the Motorhome Information Kit for detailed instructions.

ROOF AIR CONDITIONER WITH HEAT PUMP

The roof air conditioner is controlled by the same coach thermostat that controls the furnace. Refer to the "LP Gas Furnace" section for details. When the thermostat is switched to the "cool" position and the temperature is set below the ambient room temperature, the air conditioner will operate automatically.

Air flow into the coach cabin can be controlled and directed by adjusting the vents ⑦.

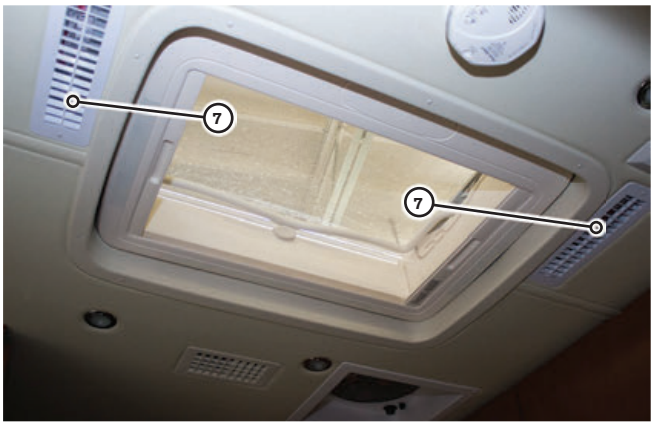

⚠ CAUTION

Before operating the thermostat, carefully read and follow the operating instruction in the manual located in the Motorhome Information Kit.

HEAT PUMP

The air conditioner has a heat pump designed to take the chill out of the air. To turn on the heat pump, turn the thermostat to "Heat Pump" mode and set the temperature just above the ambient room temperature.

⚠ NOTICE

The air conditioner/heat pump operates only on 120 volt AC shoreline or generator power.

MAINTAINING THE ROOF AIR CONDITIONER/HEAT PUMP

Clean or change the air conditioner filter at least every two weeks when the air conditioner is in operation. Do not operate the air conditioner without a filter.

CLEANING/CHANGING FILTER

1. Release the filter cover by depressing the retainer clip ①.

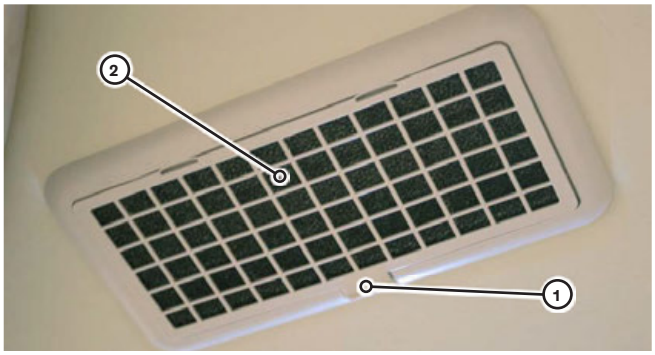

2. Remove the filter ② and wash in warm soapy water. Dry the filter thoroughly before reinstalling. If the filter is excessively dirty, replace with a new filter.

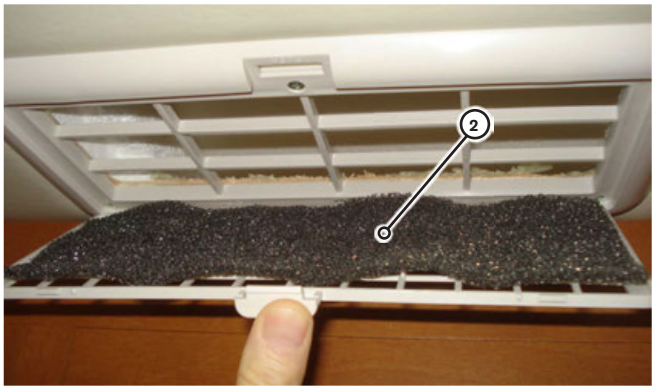

NOTE: Refer to the air conditioner manual in the Motorhome Information Kit for detailed maintenance instructions.

COACH POWER ROOF VENT

The coach power roof vent is used to provide controlled air flow throughout the coach cabin. Use the vent fan in conjunction with an open window to provide fresh air flow.

OPERATING CONTROLS

The on/off switch ③ controls the power to the fan. A three-position rotary switch ④ controls the fan speed. Turn the switch clockwise to positions 1, 2, or 3 to set the fan speeds to low, medium or high respectively.

The roof vent controls include an on/off switch and a thermostatically controlled fan speed switch. The 12 volt DC fan provides proper ventilation, comfortable temperature control and adequate air flow. It is also used to vent the shower and toilet. Opening a window while operating the fan produces maximum air flow. Opening windows farthest away from the fan will provide the best air exchange. Open windows sufficiently to allow proper air circulation.

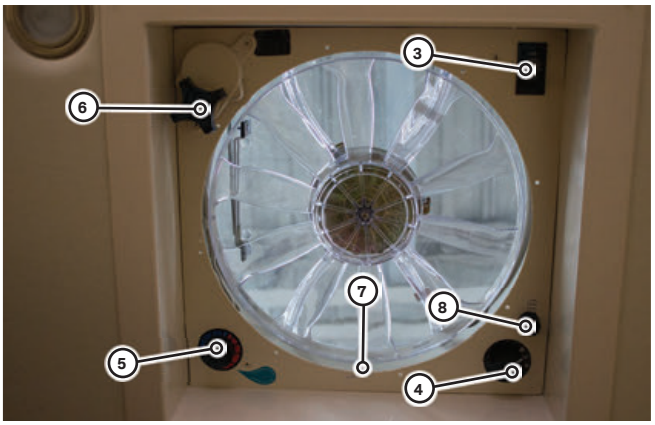

NOTE: The roof vent must be open at least 3 inches (76 mm) or the internal safety switch will prevent the fan from operating.

THERMOSTAT OPERATION

A rotary thermostat ⑤ controls the coach cabin temperature. If the roof vent is open, the fan motor will start and stop automatically as the interior coach temperature exceeds or drops below the selected temperature.

VENT HOOD HEIGHT CONTROL

The rotary knob ⑥ controls the height position of the vent hood. Turn the knob clockwise to pull the hood down and close it. Turn the knob counterclockwise to raise or open the hood.

CLEANING INSTRUCTIONS

1. Turn off the fan motor using the on/off switch ③.
2. Locate the thumb tab on the screen ⑦, and pull down to unsnap the screen.
3. Wash the screen and fan blade with a light, non-abrasive soap, rinse and dry.
4. Reinstall the screen by gently snapping it back into place.

CLEANING TIP

Once washed and dried, you may wipe or spray protectant onto the screen and blade (use only a water based protectant – do NOT use a petroleum based protectant). Buff to a high-gloss finish. This will minimize the amount of dust and dirt buildup.

⚠ NOTICE

The power roof vent is protected by a 4 amp fuse ⑧. If the fan fails to operate, verify that the fuse is intact and replace if necessary.

BATHROOM ROOF VENT

The bathroom roof vent ⑨ provides air flow and venting when using the shower.

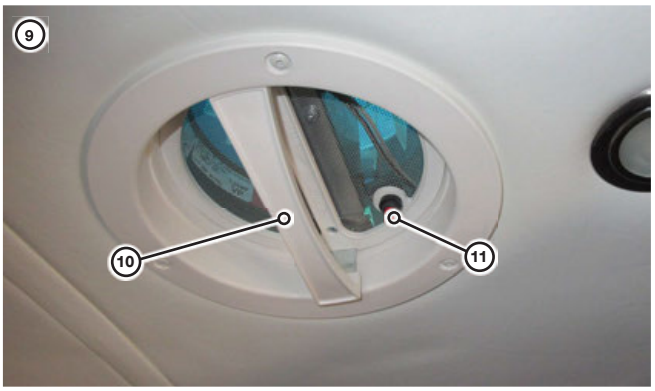

OPERATION CONTROLS

VENT HOOD OPEN/CLOSE

To open the vent hood, push the handle ⑩ up. To close, pull the handle down.

FAN ON/OFF SWITCH

The fan provides proper ventilation of the bathroom cubicle.

The switch ⑪ is used to turn the fan on and off. The vent must be open when the fan is turned ON.

SIDE WINDOW VENTS

Lift the handle ① and push outward till until it snaps into position to open the window vent and to close the window pull handle ① inward till window is fully closed and click handle ① back as shown.

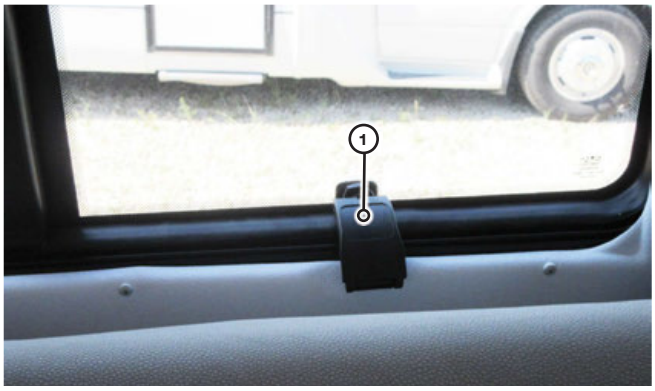

To open egress windows, pull up the two handles ② and push out the window.

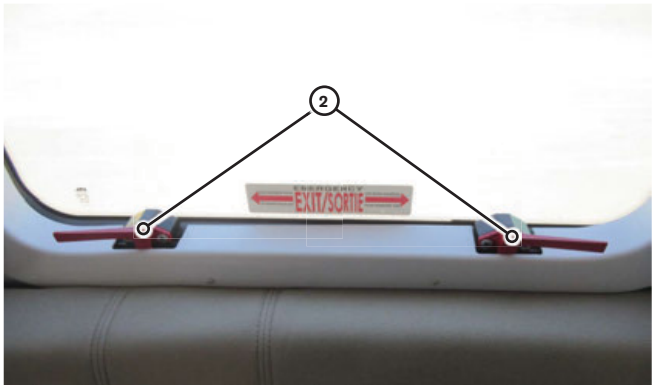

MANUAL ROOF VENT

Use the manually operated roof vent ③ in conjunction with the power roof vent to provide adequate air flow throughout the motorhome.

The roof vent is equipped with a blind ④ that slides across the opening to limit the amount of sunlight entering the motorhome.

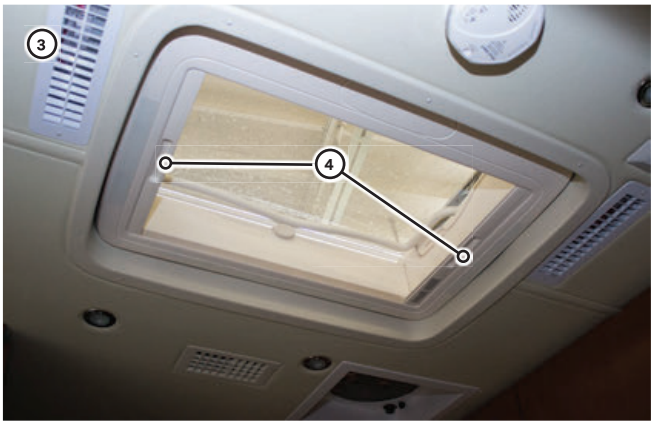

⚠ NOTICE

When leaving the motorhome for extended periods, ensure all roof vents are fully closed to prevent rain from entering the coach interior.

OPENING THE ROOF VENT

1. Press the latch release button ⑤ on the handle ⑥.
2. Push upwards on the handle ⑥ and latch the handle bar into the desired seat ⑦.

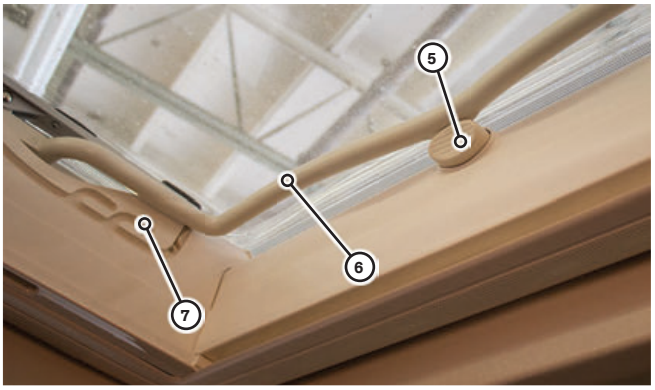

CLOSING THE ROOF VENT

1. Lift the handle (6) to release it from the seat (7).
2. Pull down the roof vent down using the handle (6).
3. Ensure latch (5) securely locks the handle (6) in the closed position.

DAY/NIGHT ROLLER SHADE CONTROLS

Your motorhome is equipped with manual day and night roller shades.

POSITIONING DEVICE

On the right side of the roller shades are positioning devices. The positioning device controls the upper stopping point of the shade. To make an adjustment, turn the dial either clockwise (right end view) to the lower stopping point (8) or turn the dial the opposite way (counterclockwise) to raise the stopping point (9).

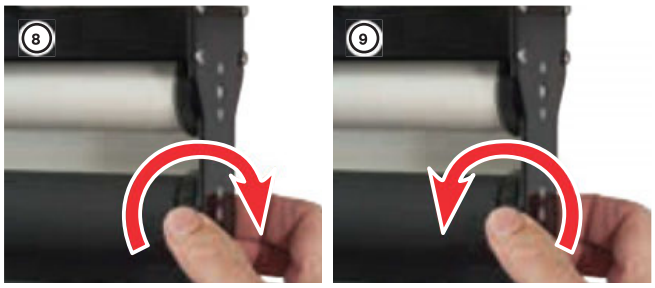

TENSION

On the left side of the roller shades are tension dials. The tension dial controls the upward speed. To make an adjustment turn the dial clockwise (left end view) to increase speed (10) or turn the opposite way (counterclockwise) to decrease speed (11).

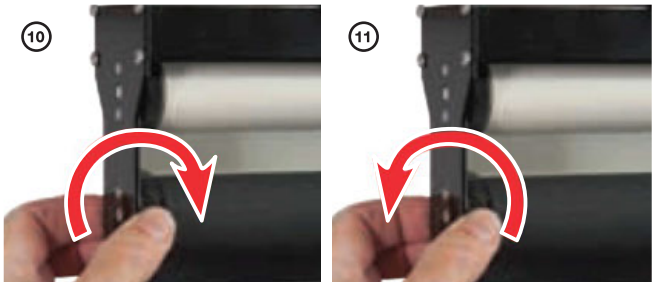

ENTERTAINMENT SYSTEMS

OPERATING THE TV

The TV is stowed against the dividing wall (12):

The TV (13) is located facing the couch and is locked in position when traveling. To unlock the TV, pull down the latch release knob (14) and reposition.

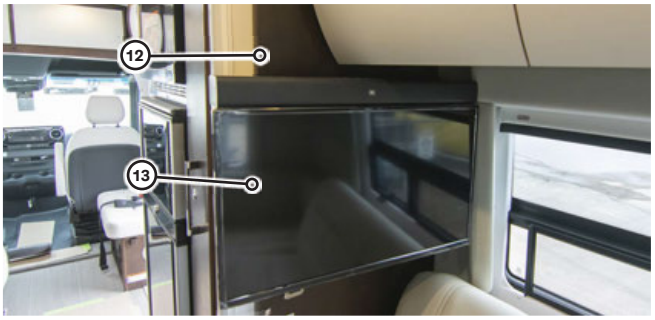



NOTE: It is possible to position the TV so it can be viewed from dinette (15).



To store the TV, fold the TV back against the dividing wall and secure with the latch.

NOTE: When traveling, ensure the TV is locked in the stored position.

Refer to the TV manual in the Motorhome Information Kit for detailed operating instructions.

⚠ WARNING

Do NOT watch TV while driving. Do NOT take your eyes off the road for extended periods of time or a crash causing injury or death could result. Do NOT give extended attention to the in-dash navigation or entertainment system while driving.

SOUNDBAR OPERATION

Your motorhome is equipped with a JBL soundbar. See the JBL manual in your Motorhom Information Kit for more information.

BLURAY OPERATION

All motorhomes are equipped with a smart BluRay ⑩ for viewing DVDs or Bluray Discs on the TV. Refer to the entertainment system operator's manual in the Motorhome Information Kit for detailed operating instructions for the entertainment system.



TV UTILITY PANEL

The TV utility panel ⑥ is equipped with a TV antenna booster/WiFi power switch. The TV antenna booster button ⑦ will enhance performance of the TV only when receiving a signal or program "over the air" while the WiFi power button ⑧ will enable or disable the 12v power to the WiFi router.

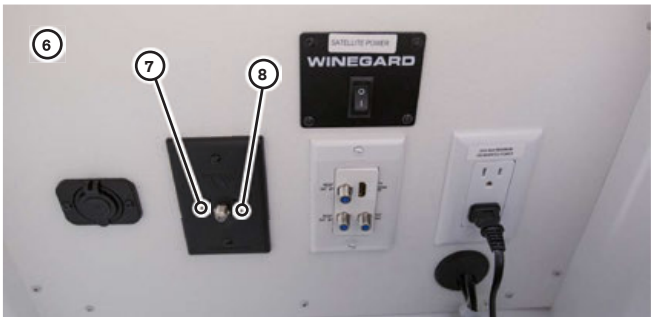

⚠ NOTICE

Press the black button ⑦ to turn on the antenna booster when viewing TV using only the roof antenna. Turn off the antenna booster for all other TV functions.

EXTERNAL CABLE TV CONNECTION

Your motorhome is equipped with an external cable TV hookup connector ⑨ located in the rear utility center.

NOTE: Perform a channel scan on your TV after connecting cable.

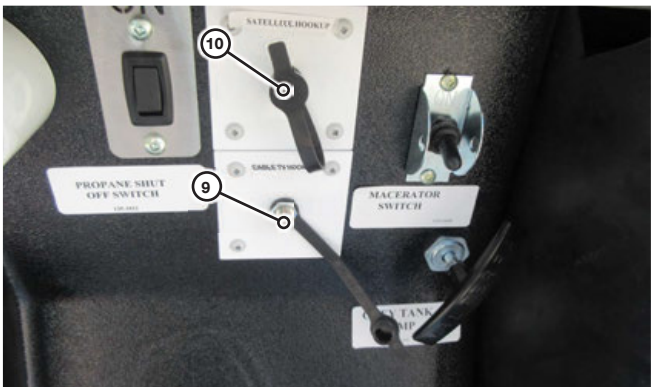

EXTERNAL SATELLITE TV CONNECTION

Your motorhome is equipped with an external satellite TV hookup connector (10) located in the rear utility center.

WIFI EXTENDER

Your motorhome is equipped with a Winegard ConnecT 2.0 WiFi Extender with a built in TV Antenna (11). This enables WiFi signal amplification or 4G/LTE data service (with subscription).

In order to use the WiFi extender, the WiFi power button (8) must be enabled.

Refer to the WiFi Extender manual in the Motorhome Information Kit for further details.



ENTERTAINMENT SYSTEM SCHEMATICS

SERENITY ENTERTAINMENT SYSTEM SCHEMATIC

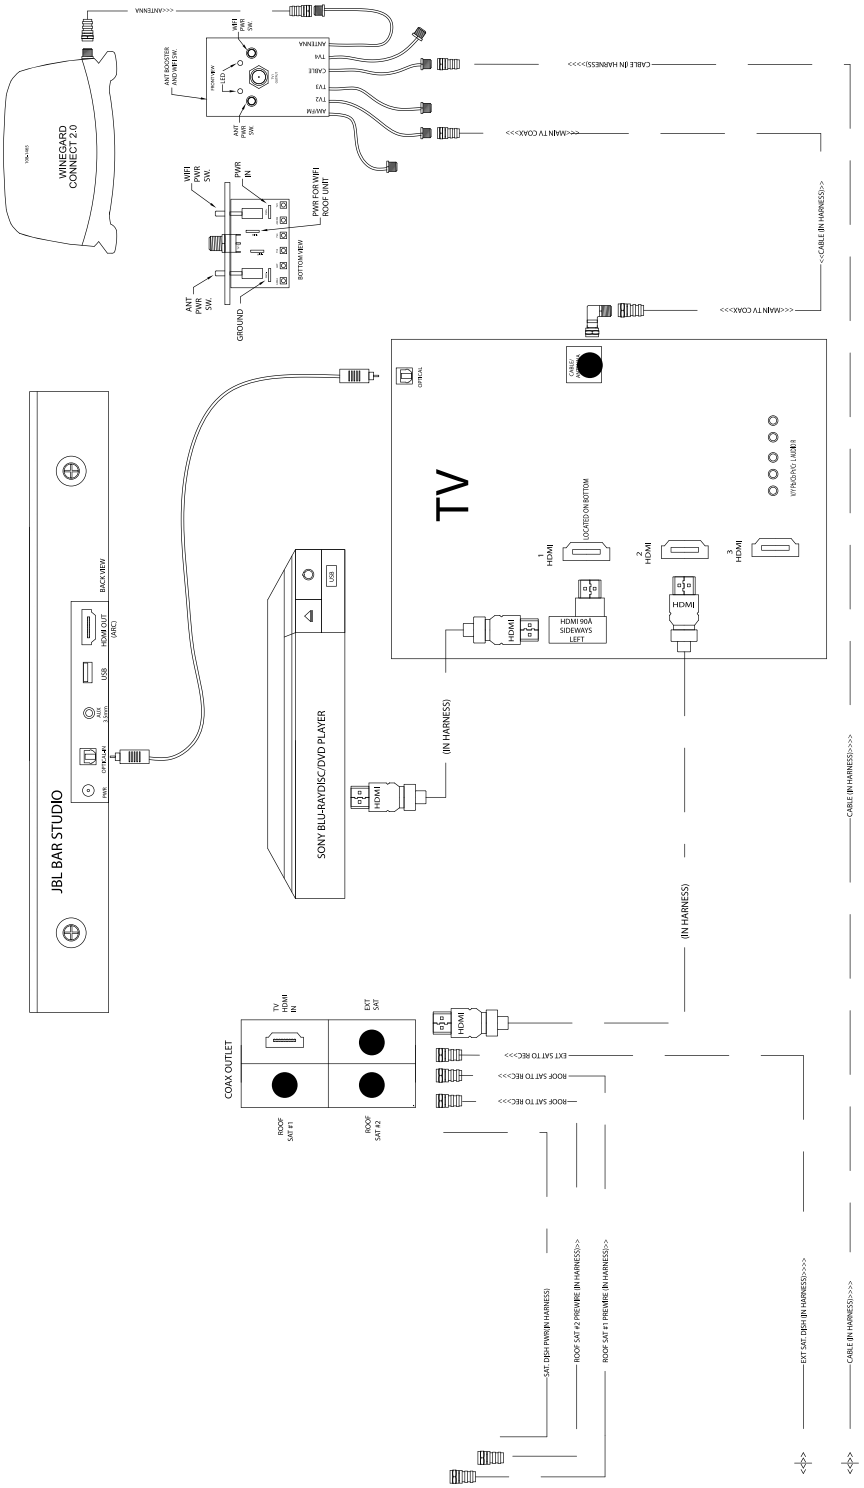

SATELLITE PRE-WIRE SCHEMATIC

Your motorhome is pre-wired for satellite dish installation (location varies according to floor plan).

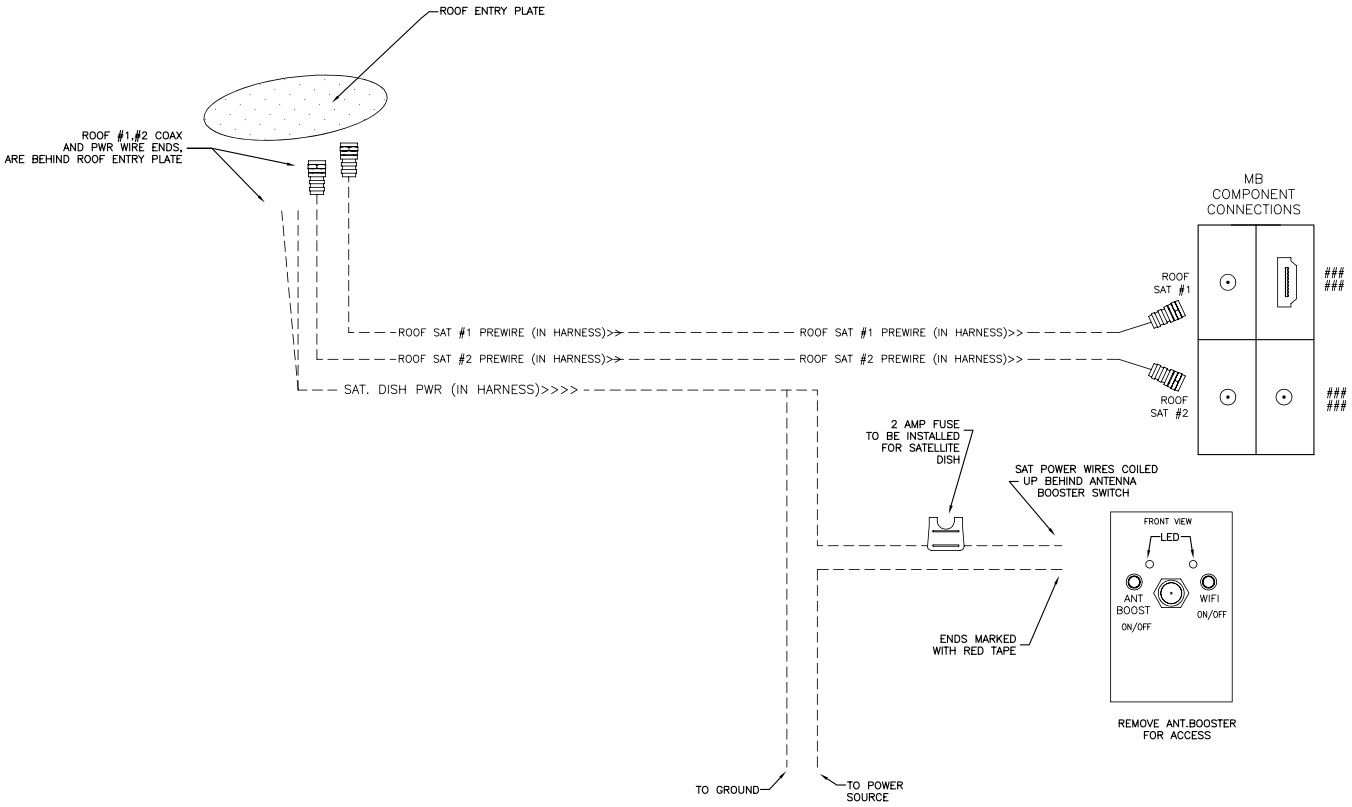

FORWARD BED

The forward coach seating can be converted into a double or single bed by following the procedures below.

DOUBLE BED

1. Remove the cushions from the forward sofa and chair ①.



2. Pull out the support bar ④ from the passenger side forward chair frame and fold out the cushion supports from the passenger side ② first then the driver side ③ forward sofa frame. Fold out the back seat cushion support ⑤.

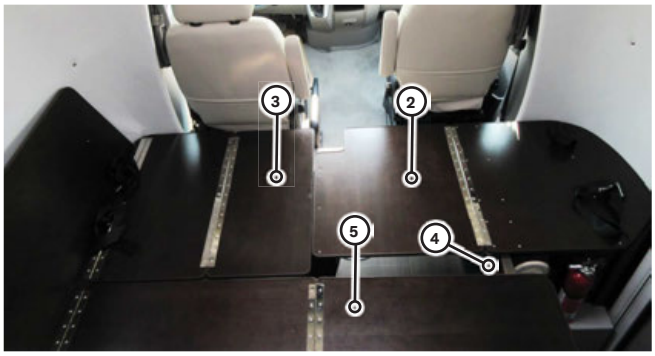

3. Arrange the seat cushions ⑥ as indicated on the seat frame label ⑦ to form a double bed.





SINGLE BED

1. Remove the cushions from the forward sofa and chair ①.



2. Fold out the cushion supports from the passenger side ② first then the driver side ③ forward sofa frame.

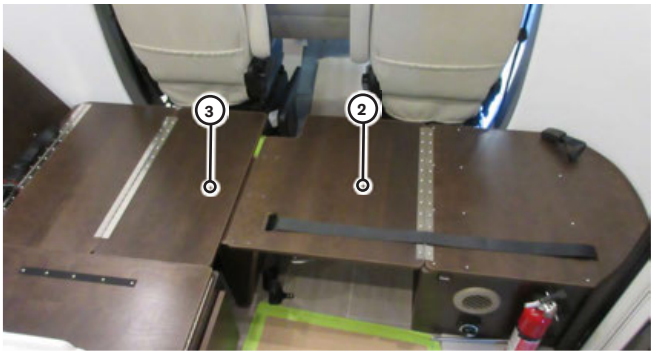

3. Arrange the seat cushions ⑥ as indicated on the seat frame label ⑦ to form a single bed.





ELECTRIC REAR SOFA

⚠ WARNING

The electric sofa bed should only be operated by an adult. The bed should not be operated while persons are seated on it.

The electric sofa bed ⑧ provides additional seating positions as well as accommodates sleeping when converted.



CONVERTING TO A BED

1. Depress the bottom of the switch ⑨ (located in the two-door wardrobe) to fold out the main cushion ⑩.

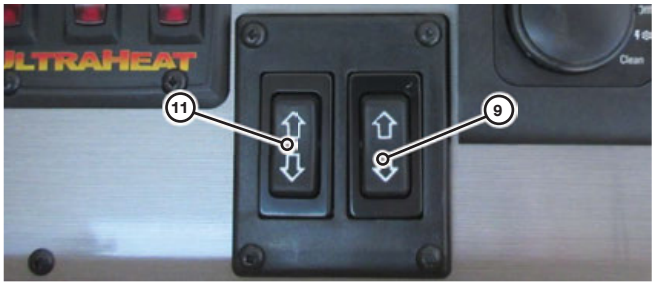

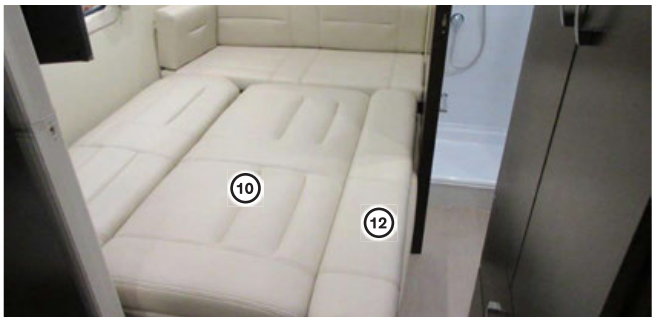

2. Depress the bottom of the switch ⑪ to fold out the lower cushion ⑫.

MANUAL OPERATION

If the electric fold out function fails to operate, the sofa can be converted to a bed manually by following the procedure below.

1. Open the rear curb side access door ⑬.



2. Locate and remove the left and right cotter pins ⑭.

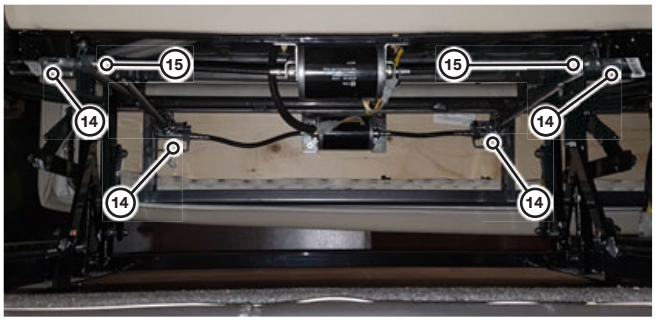

3. Remove the left and right drive cable nuts ⑮.
4. From inside the coach, fold out the sofa.

REMOVABLE TABLE

Depending on the selected options, there are either 1 or 2 brackets installed to support the table.

- Attached to the front Driver Side Dinette ①
- Attached to the rear sofa (Sofa option only) ②





ATTACHING THE TABLE

1. Remove table ③ and support ④ from storage location in the wardrobe .

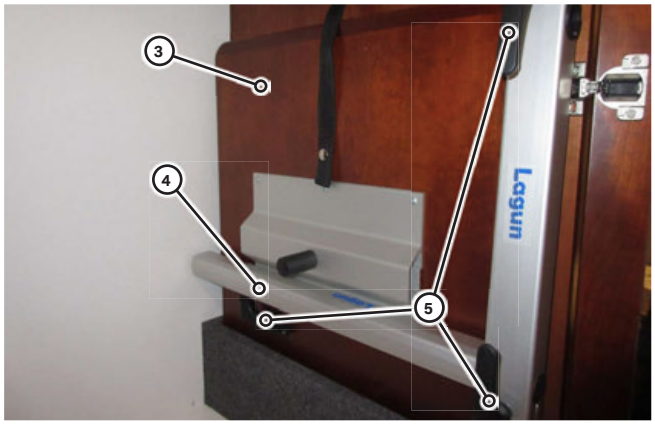

2. Loosen handles ⑤ on support to allow movement.
3. Slide bottom of table support ④ in to groove on table bracket and tighten handle ⑥ to secure support in place.

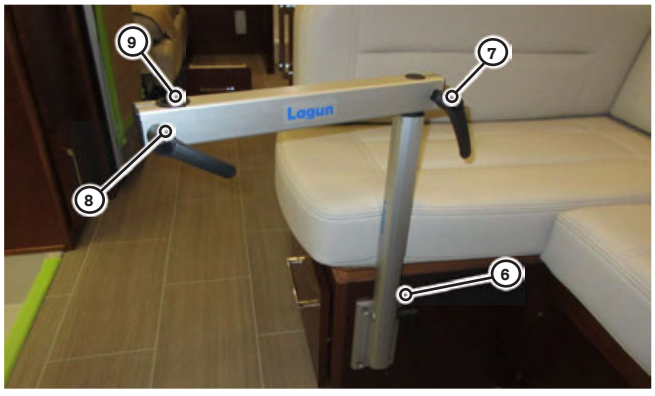

4. Place post on bottom of table ⑩ in to the opening at the top of the support ⑨.

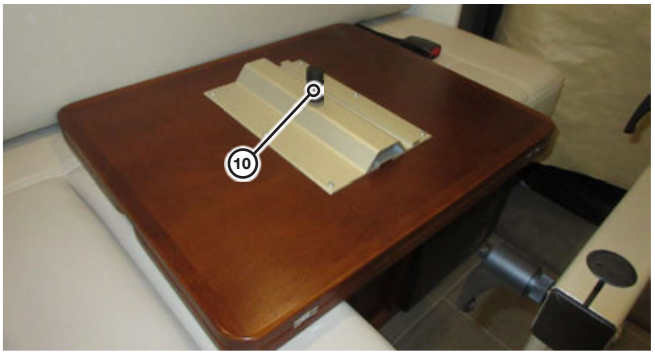

5. Adjust the position and rotation of the table to your liking, and tighten handles ⑦ and ⑧ to secure in place.



REMOVING THE TABLE

Follow steps 1 through 5 above in reverse order to remove and store the table.

ELECTRICAL SYSTEM OPERATION

ELECTRICAL SUPPLY

Your motorhome is equipped with two electrical systems that operate on separate voltages: an internal 12 volt DC system (coach batteries) and an external 120 volt AC system (shore power).

The 12 volt DC system draws power from the engine's battery and charging system while driving.

When parked, the 12 volt DC system operates from the coach batteries, from shore power cable through the inverter/charger or from the generator through the inverter/charger. The coach batteries charge automatically when the unit is connected to shore power or when the engine or generator is running.

The 120 volt AC system operates either from the optional 120 volt AC generator installed in your motorhome or from the outside shore power cable connection. 120 volt inverted AC power is available in designated receptacles restricted to the inverter wattage limitations.

⚠ WARNING

Do not connect the external power cord until you have confirmed the campground has the proper polarity and grounding. Improper grounding or reverse polarity may cause component damage or failure and/or personal injury or death.

SHORE POWER

To operate using shore power, connect the 120 volt AC power supply cable (stored in the driver's side rear exterior storage compartment) to the external receptacle located on the driver's side of the motorhome.

To connect the 30 amp power supply cable, rotate the cover ① counterclockwise and lift up. Insert the power cable ② into the socket by aligning the locking tab on the connector pin with the slot in the socket. Turn the socket clockwise to lock in place. Use a locking ring ③ to prevent accidental disconnection.

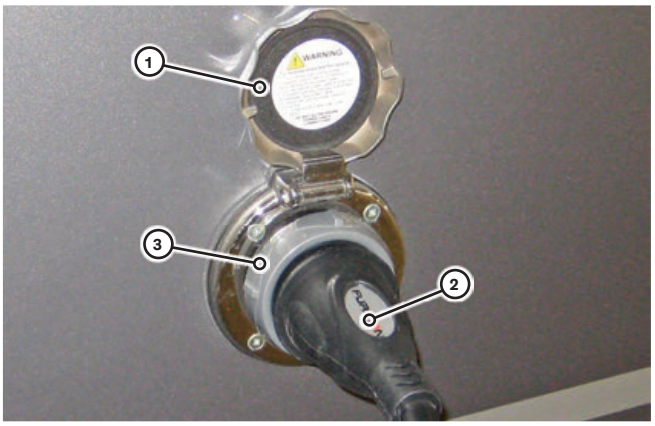

BATTERY DISCONNECT SWITCH

The 12 volt DC electrical supply to the coach portion of the motorhome is controlled by the battery disconnect switch located in the coach doorway. The switch reduces the demand on the coach batteries to a limited residual draw when the motorhome is not in use or in short-term storage. Rotate the switch to the 12 o'clock position ④ to disconnect the batteries. Rotate to 3 o'clock position ⑤ to connect the batteries.

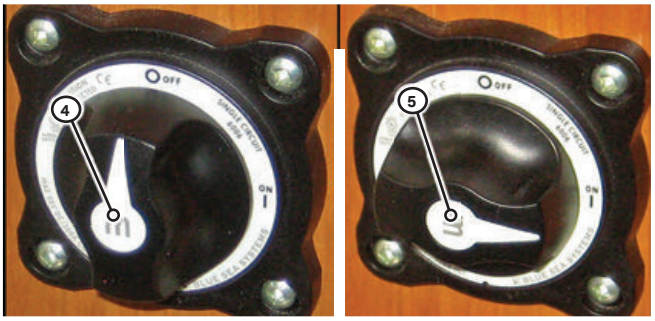

WIRING SCHEMATIC

SERENITY 30 AMP 120V WIRING SCHEMATIC

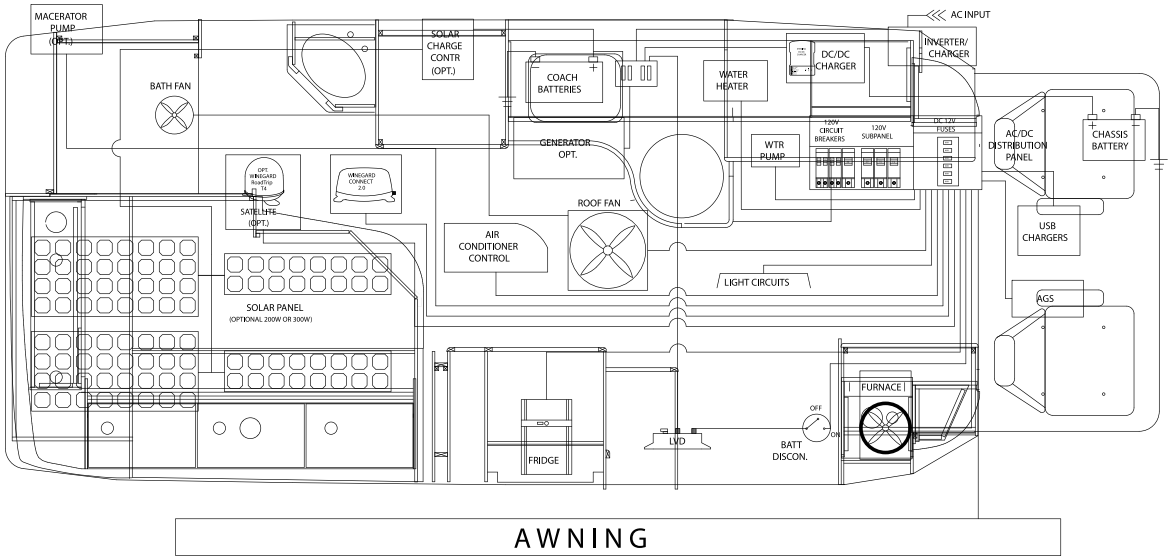

SERENITY 12V WIRING SCHEMATIC

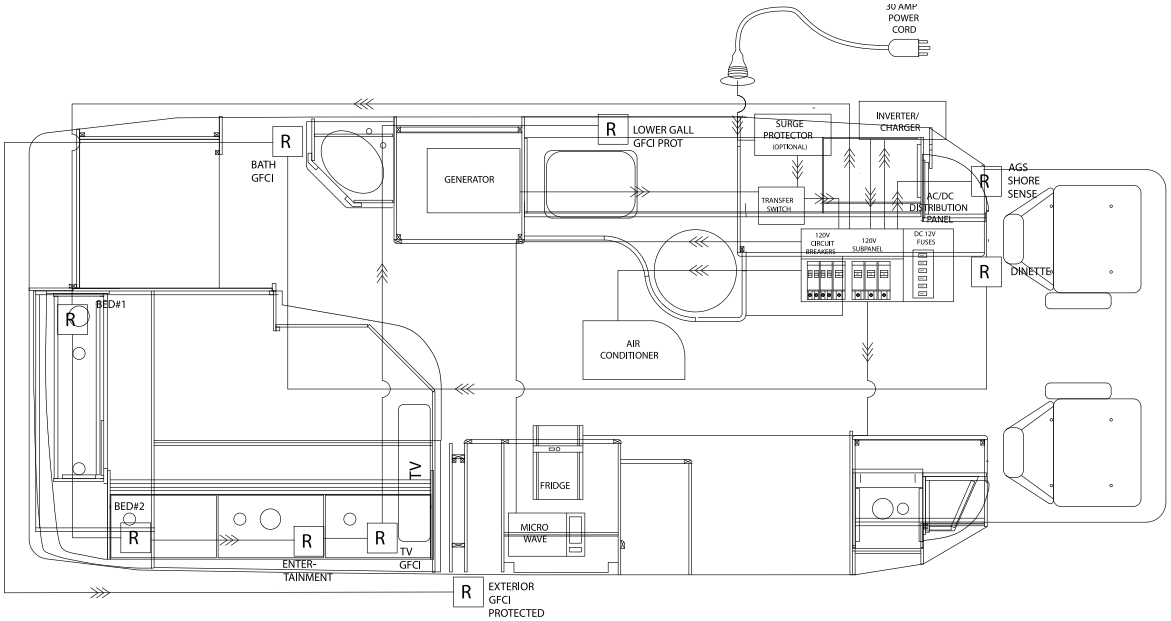

SYSTEM MONITOR

The system monitor panel, located in the wardrobe with the two doors, monitors the following systems:

WATER PUMP SWITCH ①

This switch controls the power to the water pump. The light above the switch illuminates when the water pump is activated.

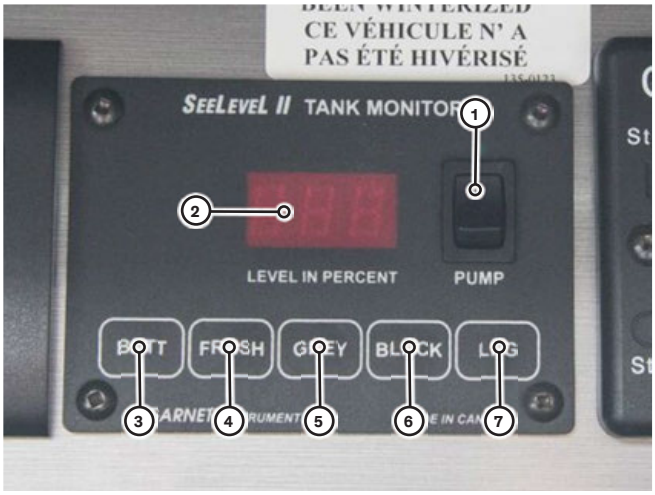

Switches ③ - ⑦

Depress the following switches to monitor the level of the system capacity used/available on the LED display ②:

- BATT ③ - Displays the coach battery power level
- FRESH ④ - Displays the fresh water holding tank level
- GREY ⑤ - Displays the grey water holding tank level
- BLACK ⑥ - Displays the black water holding tank level
- LPG ⑦ - Displays the LP Gas tank level

Refer to the detailed operating instructions in the Motorhome Information Kit

WATER HEATER SWITCH ⑧

This switch controls the power to the water heater. Turn the switch counterclockwise from the "OFF" position for water heater function or clockwise from the "OFF" position for winterization or cleaning. Reverse direction to the "OFF" position to turn off the water heater.

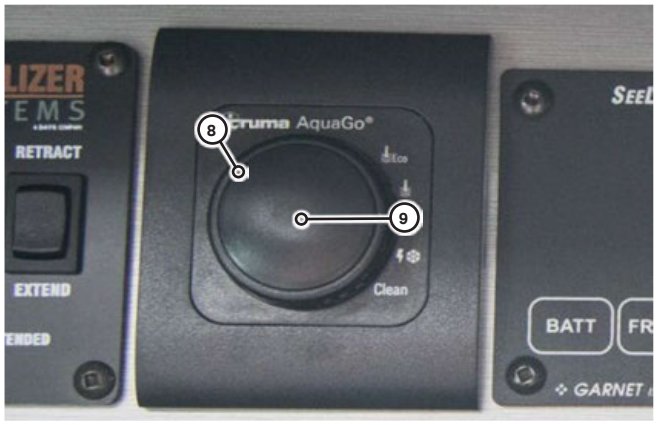

⚠ NOTICE

The on-demand water heater switch light ⑨ illuminates when the water heater is turned to the ON setting.

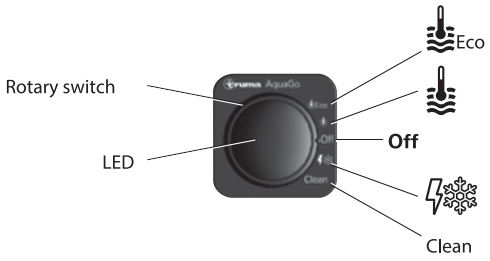

⚠ NOTICE

For safety reasons, after 30 seconds the decalcification process cannot be stopped until the system has been rinsed in accordance with the instructions.

ELECTRICAL SYSTEM COMPONENTS

The following major electrical system components are mounted in the dinette seat behind the driver's seat.

- Step 20 amp auto reset breaker (2)
- Stabilizer jacks 40 amp auto reset breaker (3)
- Jack module (4)
- Transfer switch (5)
- Awning relay (6)
- Ground bar (7)
- Surge protector (8)
- Step Override Fuse (11)
- Tail Light Relay (12)

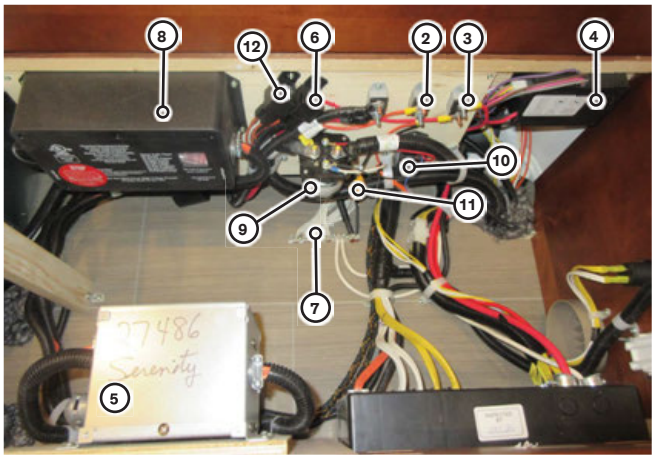

POWER DISTRIBUTION PANEL

The power distribution panel (13), located in a lower cabinet fascia, contains the 120 volt breakers for the 120 volt AC system and 12 volt fuses for the 12 volt DC system. Refer to your floor plan in the "Introduction" section for the power distribution panel location.



The right breaker panel (14) contains 120 volt AC breakers. Refer to the circuit breaker panel decal to identify the function of each breaker. The left breaker panel (15) contains 12 volt DC fuses. Refer to the circuit fuse panel decal to identify the function of each fuse.

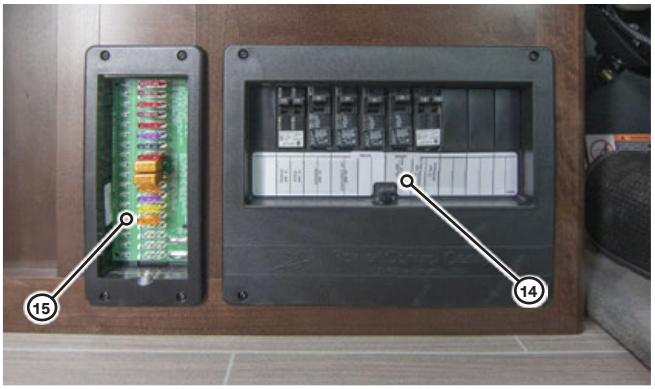

120 VOLT AC CIRCUIT BREAKERS

The circuit breaker panel protects all 120 volt AC equipment and components in the motorhome from overload, a short in the wiring or a short in the component itself. In the event of an overload, the circuit breaker cuts off the flow of electricity in the particular affected circuit of the system and helps prevent damage or fire.

If a circuit breaker "trips," allow a brief cool down period of 30–90 seconds, then reset the breaker by turning it "OFF" and then "ON." If a circuit breaker "trips" repeatedly, the circuit is overloaded or there may be a short in the wiring or in the equipment, and both should be checked and serviced by qualified service personnel. Refer to the control panel manual in the Motorhome Information Kit for further details.

NOTE: There is a single 30 amp main circuit breaker which protects the entire AC electrical system. Check the main breaker if the entire electrical system will not function on shore power or generator (if equipped).

12 VOLT DC COACH FUSES

Each 12 volt DC system circuit is protected by a dedicated fuse. When a fuse blows (refer to Figure 17), shut off all appliances or lights on the affected circuit and replace the fuse with a new one of the same amperage.

FUSE CONDITION

17



Fuse Rating	Color
5 Amp	Tan
7.5 Amp	Brown
10 Amp	Red
15 Amp	Blue
20 Amp	Yellow
30 Amp	Green

⚠ WARNING

The fuse rating for each dedicated circuit is determined by the use and character of the equipment on that circuit.

12 VOLT DC CHASSIS FUSES

Refer to the chassis operator's manual for chassis fuse functions.

DRIVER SEAT PEDESTAL FUSES

Fuse #4: 10 amp fuse powers the tail lights. Refer to Figure 18.

Fuse #24: 5 amp fuse powers the following components:

- Electric step safety retract
- Stabilizer jack safety retract
- Refrigerator (when on AUTO select 12 V power source
- Awning relay (safety lock)
- DC/DC Charger
- AGS

18

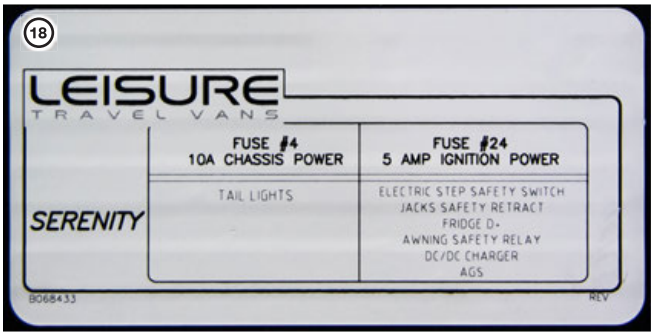

GROUND FAULT CIRCUIT INTERRUPTER (GFCI)

Various outlets in the motorhome, particularly those near sinks and water supplies, are connected to a GFCI. A GFCI detects electrical current that is traveling along an unintended path and automatically stops the current to reduce the risk of electrical shock and fire. If a GFCI breaker trips, unplug all the appliances on that circuit and press the reset button (19) on the outlet. To test the operation of the GFCI breaker, press the test button (20).



NOTE: GFCI receptacles may not appear as shown in this manual. If a GFCI trips repeatedly there is likely a significant fault in that circuit. Have the faulty circuit and the GFCI investigated and repaired by a qualified technician before using it again.

For detailed wiring, GFCI locations and GFCI-protected receptacles see the AC wiring schematics.

⚠ CAUTION

The GFCI will not completely eliminate the risk of electrical shock. Small children or persons with heart conditions should be extra cautious because electrical shock could cause burns or cause the heart to stop even when a GFCI is present.

NOTE: The GFCI circuit in the bathroom will trip when a fault occurs at the exterior receptacle. The galley receptacle is protected through a GFCI located in the bedroom or couch area.

AUXILIARY LP GAS GENERATOR (OPTIONAL)

The generator is located below the coach floor behind the second door on the driver's side.

⚠ CAUTION

Before operating the generator, refer to the LP Gas generator operator's manual located in the Motorhome Information Kit.

OPERATING THE AUXILIARY LP GAS GENERATOR

Turn on the LP Gas valve by depressing the top of the LP Gas shut off switch (1) located in the utility center in the driver's side exterior compartment.

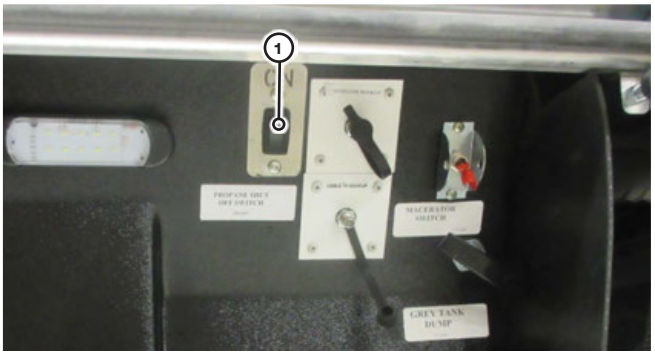

⚠ NOTICE

The generator starter draws power from the coach batteries, so the chassis ignition switch does not have to be on for the generator to operate.

The LP Gas generator control panel (2) is located in the two-door wardrobe.



STARTING THE AUXILIARY LP GAS GENERATOR

1. Depress and hold the STOP/PRIME ④ of either of the two generator start buttons for about 5 seconds or until the clicking sound stops.
2. Depress and hold the START/PREHEAT ③ button until the generator starts running.

NOTE: The buttons can be found in either of two locations. One is located behind the generator front panel (location may vary based on floor plan). The second button is located in the electrical utility panel (cabinet above the entrance door).

3. Allow the generator engine to settle and run smoothly before operating any electrical appliances.
4. Become familiar with the output capacity and capability of your generator.
5. Be careful not to overload the generator. Refer to the generator manual in the Motorhome Information Kit for further details.

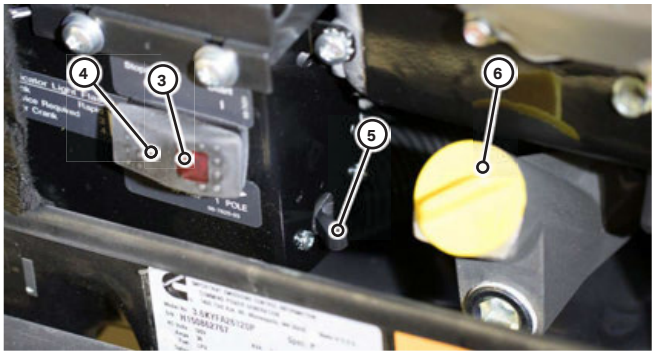

STOPPING THE AUXILIARY LP GAS GENERATOR

Prior to stopping the generator, turn off all large appliances and let the generator run for two minutes to cool down.

To stop the generator, depress and hold the bottom of the generator stop button ④ until the generator engine has completely stopped.

⚠ NOTICE

There is a breaker ⑤ on the side of the unit. If the power plant is running and there is no power, check this breaker. The generator should be run a minimum of two hours a month.

⚠ NOTICE

Be sure to check the generator oil reservoir on a regular basis ⑥.

AUXILIARY DIESEL GENERATOR (OPTIONAL)

The auxiliary diesel generator ⑦ is located below the coach floor.



⚠ NOTICE

Before operating the auxiliary diesel generator, refer to the diesel generator operator's manual in the Motorhome Information Kit.

The diesel generator control panel ⑧ is located in the two-door wardrobe.

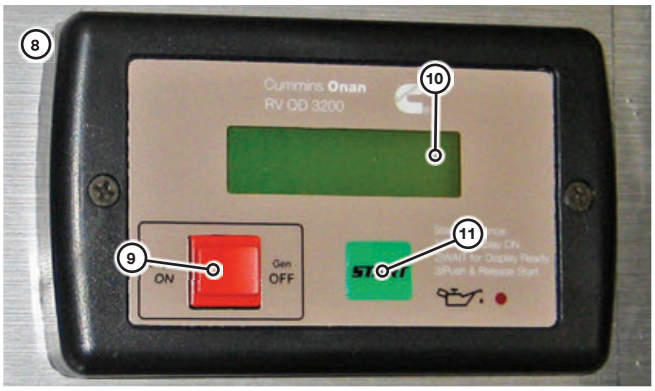

STARTING THE AUXILIARY DIESEL GENERATOR

1. Depress red “Display ON” button (9) to waken the generator set display screen (10) and start the fuel pump to prime the system (the fuel pump will only run for 5 minutes if the generator doesn’t start).
2. Depress the start button (11) until the diesel generator engine starts running then release the button. The display screen will show “GEN OFF” until the engine starts.
3. Allow the diesel generator engine to settle and run smoothly before operating any electrical appliances.
4. Become familiar with the output capacity and capability of your diesel generator.
5. Be careful not to overload the diesel generator. Refer to the diesel generator manual located in the Motorhome Information Kit for further details.

STOPPING THE AUXILIARY DIESEL GENERATOR

Prior to stopping the generator, turn off all large appliances and let the generator run for two minutes to cool down.

To stop the generator, depress the red “Gen OFF” button (9).

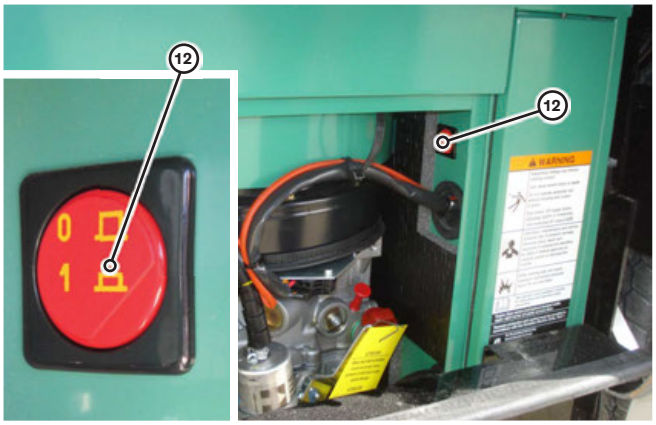

⚠ WARNING

Press the stop switch (12) to stop the generator set or to prevent it from starting while performing maintenance and/or service. To allow the generator set to run, press the switch again.

⚠ NOTICE

Overloading the generator for long periods of time can cause the generator windings to overheat. Keep electrical loads within the recommended wattage ratings.

⚠ CAUTION

Do not smoke while refueling. Keep flames, sparks, and smoking materials away from fuel or flammable fumes.

⚠ NOTICE

The "Gen OFF" button does not also function as a start switch. The diesel generator can only be started using the remote control panel inside the motorhome.

GENERATOR SAFETY

ELECTRICAL

⚠ WARNING

Exercise extreme care and caution when handling the generator and its components. Carelessness can be dangerous and even fatal.

Never touch any electrical leads, equipment or appliances when your hands or clothes are wet or when you are standing on wet ground or in water.

Do NOT attempt to repair the generator yourself. Have all service and repairs performed at an authorized service center only.

Never check the generator oil level while the generator engine is running.

ASPHYXIATION

⚠ WARNING

All internal combustion engines produce carbon monoxide (CO) gas fumes when running. This gas is poisonous, colorless, odorless, tasteless and is lighter than air.

1. Do not run the generator and an intake vent fan at the same time. This could draw gases into the motorhome.
2. Do not open windows or vents on the side where the generator exhaust pipe is located.
3. Park so the wind carries exhaust gases away from the motorhome. Be aware of potential gas fumes from other nearby vehicles.
4. Do not operate the generator if there are any obstructions such as vegetation, snow, buildings etc., which could deflect gas fumes under or into the motorhome.

AUTOMATIC POWER TRANSFER SWITCH

AUTOMATIC SWITCH OVER

Starting the generator will automatically switch power from 120 volt AC shore power to generator power.

BUILT-IN DELAY

An automatic 20–30 second delay feature prevents the generator from starting while under load. This delay allows the generator to have the required amount of warm-up time before transferring power.

This switch (13) automatically transfers power from 120 volt AC shore power to generator power and prevents damage to any circuitry if shore power and the generator are inadvertently connected and operated simultaneously.

⚠ NOTICE

Always verify that appliances are turned off before starting or stopping the generator. Do NOT start the generator while it is under load. Ensuring all appliances are in the off position will help prolong the life of the appliances.



12 VOLT DC SYSTEM

The 12 volt DC power system in your motorhome consists of the following two distinct, but interconnected, battery systems

CHASSIS BATTERY

The chassis battery ① operates the vehicle starter, vehicle accessories and all vehicle controls on the instrument console, such as the heater fans, exterior lights, horn, speed control, windshield wipers, etc.

Disconnect the chassis battery cables when parking the motorhome for an extended period of time. Refer to the chassis operator's manual in the Motorhome Information Kit for the chassis battery quick disconnect location.

⚠ NOTICE

Disconnecting the battery cables from the chassis battery can clear the engine/transmission logic modules. These modules will automatically re-calibrate when you reconnect the battery and start the engine.

CHASSIS BATTERY LOCATION

The chassis battery is located under the driver's side cab floor ①.



⚠ NOTICE

An 80 amp fuse ② located under the driver seat, protects 12 volt DC coach power system.

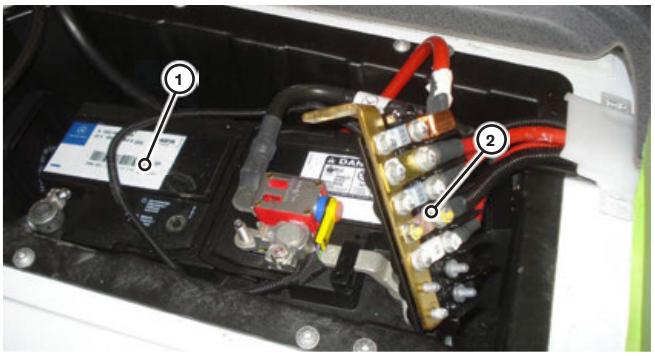

COACH BATTERIES (12 VOLT DC POWER SUPPLY)

The coach batteries ③ supply power to all the 12 volt DC lights and equipment in the living area of your motorhome. This includes the roof vents, refrigerator (when operating in 12 volt DC mode), generator starter, water pump, furnace fan, interior lights, holding tank, water level gauges, etc.

The coach fuse block and the fuse for the solar panel are located inside the chassis battery compartment. Inside the fuse block, a cable ④ connects the Solar Panel Fuse.

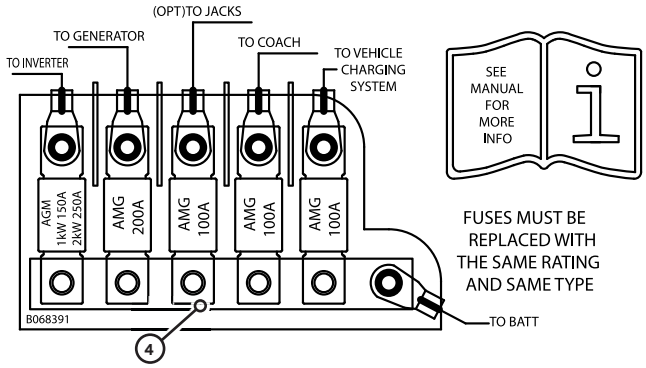

⚠ CAUTION

Fuses must be replaced with the same rating and same type.

⚠ NOTICE

A surge protection fuse is installed inside the coach battery storage compartment ③. If the coach batteries fail to operate, inspect this fuse and replace if necessary.

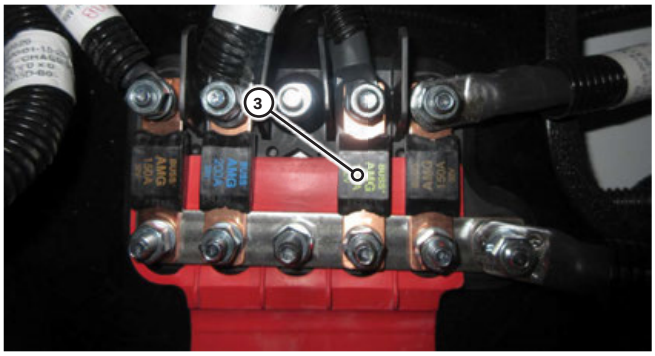

COACH BATTERIES LOCATION

The coach batteries ④ are located behind an access door on the driver's side of the coach.

Lift the latches ⑤ on the base of the battery mounting base rails to slide out batteries. Engage latches to secure batteries when battery work/inspection has been completed.

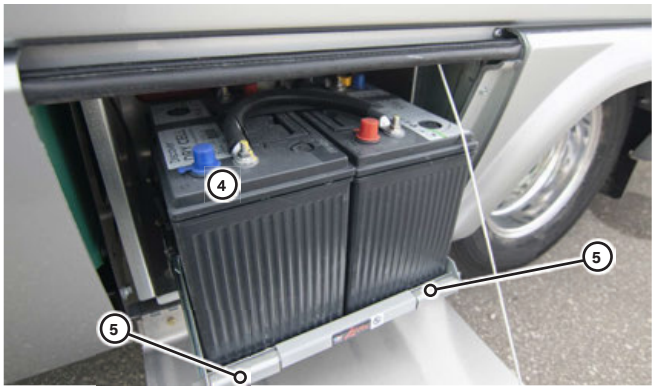

COACH BATTERY CONDITION METER

For voltage readings, refer to Xantrex Inverter Remote Control Status display ⑥.

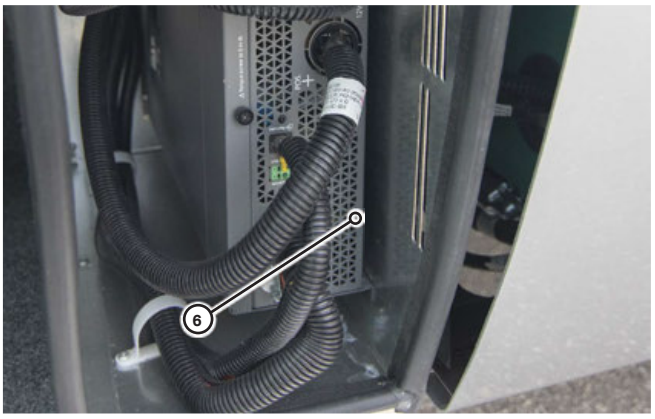

BATTERY MAINTENANCE

Automotive batteries store chemicals that react and convert chemical energy into electrical energy. When electrical energy resources are used the battery drains and becomes discharged. Directing charging current to the batteries from the engine alternator (when the motorhome's engine is running) or by using the motorhome inverter/charger will recharge the coach batteries and enable them to continue functioning normally.

BATTERY PROBLEMS

Several conditions can destroy the battery's function including sulfation and freezing.

Sulfation occurs when lead sulfate crystallizes and deposits on the negative plates inside the battery. This condition is caused when a battery is deprived of a full charge for an extended period of time (30 days or more, especially during warm weather). If sulfation occurs, you will have to replace the battery.

Freezing can discharge, damage or destroy a battery. Batteries must be maintained at a nearly fully-charged condition to prevent the liquid electrolyte inside the battery from freezing.

LONG-TERM STORAGE

Turn off the coach battery disconnect during extended periods of storage. Hook up a battery charger at least once a month, or connect the 120 volt AC shore line to a suitable power source.

NOTE: If the unit is equipped with a factory solar option, the battery disconnect does not need to be on for the solar option to charge the coach batteries.

NOTE: If storing your motorhome for an extended period of time and batteries cannot be routinely charged, it's advised to remove the batteries and store them in a cool, dry location. If batteries are not recharged routinely while in storage, ensure batteries are fully recharged prior to reinserting batteries into your motorhome.

ADDITIONAL BATTERY MAINTENANCE SUGGESTIONS

5. Ensure batteries are securely fastened in the proper position.
6. Make sure battery clamps are tight and free from corrosion.
7. Keep the batteries and terminals clean. Dirt accumulation can prevent sufficient current from flowing through the cables, and can permit current to flow between the terminals causing the batteries to discharge.
8. Clean the battery with a solution of baking soda and water to neutralize any acid present then flush with clean water. Foaming around terminals or on top of the battery is normal during the cleaning process.

⚠ NOTICE

Do NOT allow any baking soda solution to get into the battery. This can neutralize the battery acid.

9. Dry the cables and terminals before reinstalling them. Do NOT apply grease to the metal surfaces inside the cable terminals to prevent corrosion. Grease is an insulator and will prevent the flow of electricity. Use a plastic ignition spray to protect the terminals after you have cleaned and reinstalled them.

NOTE: When removing, replacing, boosting or charging the batteries, ensure the red positive (+) cable terminals are connected to the positive (+) posts and the black negative (-) cable terminals are connected to the negative (-) posts.

10. If installing batteries or booster/charger cables, attach the red positive (+) cable terminals first then attach the black negative (-) cable terminals.
11. If removing batteries or booster/charger cables, remove the black negative (-) cable terminals first then remove the red positive (+) cable terminals.
12. Do NOT attempt to recharge frozen batteries.
13. If using a battery quick-charge unit, disconnect the cables from the batteries.

NOTE: A battery quick-charge unit would be equivalent to a boost using booster cables from another vehicle but is not a battery tender or intelligent battery charging system.

⚠ NOTICE

Do NOT attempt to start the engine using a battery quick-charge unit.

14. If you do not have maintenance-free batteries, check the battery fluid level and fill with distilled water if necessary. Do not overfill.
15. Have the specific gravity of the battery fluid checked during regular motorhome service and maintenance.

INVERTER

Triple E RV uses a Xantrex 2000W Pure Sine Wave Inverter/Charger. The 2000W inverters are standard on all units. Inverters change 12V DC power stored in batteries into 120V AC power used in household appliances. The 2000W inverter can supply 16.7A AC at full capacity.



When shore power or generator power is absent, the inverter can be switched on and used to supply 120 volt AC power to the loads mentioned above. No other receptacles will have power. The 2000 watt inverter has an internal 50 amp battery charger. Once the inverter has accepted the AC input power, Charge Mode will begin. It is not possible to turn off this charge mode.

The Xantrex Remote Panel is a complex computer control and monitor device, it is used on all motorhomes. It is factory configured for the particular inverter and battery installation of Triple E RV. If any modifications are made to the battery bank, it may be necessary to change some internal settings. Please refer to the Inverter / Remote Control manual for setting or contact the manufacturer. The Xantrex Remote Panel controls the invert and charge features of the inverter.

⚠ NOTICE

The invert feature needs to be manually switched ON and OFF. However if the inverter feature is turned ON and the battery disconnect switch has been turned off, the inverter will need to be powered up and switched ON manually the next time it is turned on.

⚠ NOTICE

Please be aware that the inverters create a standby current drain even when your equipment is turned off. To ensure battery life, turn the inverter function OFF when not in use.

⚠ NOTICE

The inverter is not intended for appliances that consume more than the specified inverter wattage. Exceeding the specified wattage could result in damage to the appliance or the inverter. Extended use of the inverter-powered receptacles will drain your batteries.

⚠ CAUTION

Before performing any service, ensure the inverter is completely disconnected from power sources. Disconnect battery (12V DC) and shore power (120V AC). Inverter should only be services by a qualified technician.

INVERTER REMOTE CONTROL PANEL

The Inverter Remote Control Panel ① is located in the rear wardrobe cabinet. The Inverter Remote Control Panel is equipped with an Inverter Function - ON/OFF switch ⑤. The Inverter/Charger System Status Display ③ shows the Battery Voltage, different stages of Battery Charging, DC Power Usage while Inverting and more information.

1. Fault ②
2. Status Display ③
3. Inverting LED ④
4. Inverter Function ON/OFF ⑤



Refer to the Inverter Remote Control manual in the Motorhome Information Kit for more information.

⚠ NOTICE

The inverter remote control panel is factory-configured for the specific inverter and battery installed in your motorhome. If modifications are made to the battery bank, it may be necessary to reconfigure the remote. Have the inverter and controls serviced by authorized personnel only.

SURGE GUARD (OPTIONAL)



When shore power is connected it passes through the EMS-LCHW30 surge protection device to protect the wiring in the Serenity.

- Do not exceed the rating on the EMS for any reason. These devices are designed to be reduced down to 120V/15A and maintain full protection.
- Do not modify the EMS in any way, as this will void the warranty, compromise protection and could result in possible shock and/or a fire hazard.
- It is important to always check the pedestal power outlet for charring. Charring indicates the AC receptacle is providing a weak connection. Should this condition exists DO NOT USE as it could result in possible melting of the RV power plug.
- All AC power extension cords in conjunction with your EMS unit should be rated 10 gauge for 120V, 30A systems and rated for outdoor use to reduce the risk of electrical shock. We recommend the length not to exceed 20-25'. Small gauge cable has higher resistance and can result in voltage loss or an electrical fire.
- Whenever servicing or installing the EMS, or any other AC powered device, make sure AC power is disconnected.
- Refer to your floor plan in the "Introduction" section for the surge protector location.

Error Code Chart	
E0	Normal Operating Condition.
E1	Reverse Polarity (hot and neutral wires reversed).
E2	Open Ground (no ground wire connection).
E3	Line 1 High Voltage (line voltage above 132V).
E4	Line 1 Low Voltage (line voltage below 104V).
E5*	Line 2 Voltage High (Line voltage above 132).
E6*	Line 2 Voltage Low (Line voltage below 104 volts).
E7	Line Frequency High (line frequency above 69 cycles per second).
E8	Line Frequency Low (line frequency below 51 cycles per second).
E9	Data Link Down (call technical support)
E10	Replace Surge protector Module (call technical support).
*Codes only apply to EMS-LCHW50 models.	

NOTE: If the EMS cuts the power to the RV it will show a PE code following the E code. This denotes the previous error or why the EMS shut down. Example: The EMS cuts power for low voltage on Line 1, and then the power is restored. The Error Code reads E 0, but the PE code reads PE 4 which tells the user low voltage was the reason for the EMS previously cutting power. This PE error code will be deleted when power is disconnected from the EMS.

NOTE: There will be a 15 second delay after plugging the motorhome into shore power while the surge protector verifies the incoming voltage.

ACCIDENTAL 240 VOLT PROTECTION

Should this condition occur, the display will read 240 volts instead of displaying the voltage and the error code message will read E3. AC power will shut down instantly.

⚠ WARNING

Do not under any circumstances bypass the EMS. Any bypass will result in severe damage to the motorhome.

TROUBLESHOOTING GUIDE

In order to help troubleshoot the problem(s) you are experiencing and render the best possible solution, it is necessary you be at your motorhome when you place your call.

1. If the display is illuminated and scrolling information, note the Error Code. If there is an Error code of 1-9, the device will interrupt the power. See Error Chart for definition of AC power problem. The device being off when an Error Code is present indicates the product is working properly and protecting your motorhome.
2. If the display is illuminated and reading Error code E 0, and yet no power is present in the coach, please contact Technical Support. You must wait for the time delay light to stop flashing.
3. If the display is not illuminated and power is in the coach there is a connection issue between the display and the main control box. Contact a qualified service center.

Refer to the surge protector manual in the Motorhome Information Kit for further details.

SOLAR POWER UNIT

Your motorhome may be equipped with a solar power kit. The solar power unit continuously charges the coach batteries to maintain the optimal charge. The solar controller ① is located in the two door wardrobe. Refer to the solar controller manual in the Motorhome Information Kit for detailed operating instructions.



⚠ NOTICE

The solar power unit is intended to charge the coach batteries only. It does not generate enough power to run the motorhome's electrical system.

LIGHTING MAINTENANCE

The following procedures detail replacement of the coach interior and exterior lights.

⚠ CAUTION

Disconnect the chassis and coach batteries before carrying out maintenance on the lighting system.

EXTERIOR LIGHTING

UPPER CLEARANCE LIGHTS ②

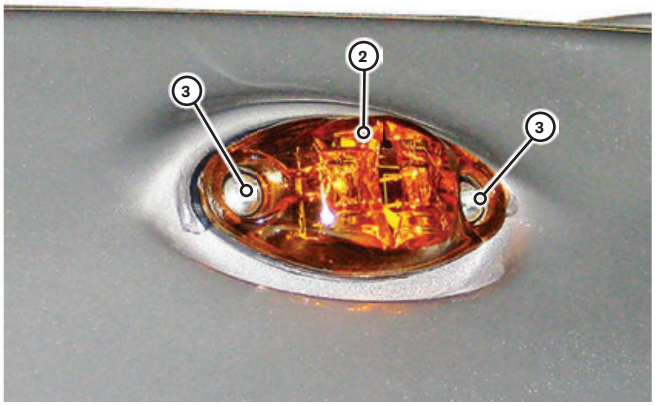

NOTE: This is a sealed LED unit and must be replaced as complete unit.

1. Remove the two screws ③ and pull the light out of the bodywork to gain access to the connections.
2. Disconnect the old and reconnect the new light.
3. Insert the new light into the bodywork and secure with the two screws ③.

REAR INDICATOR/REVERSE/BRAKE/ROAD LIGHTS ⑥

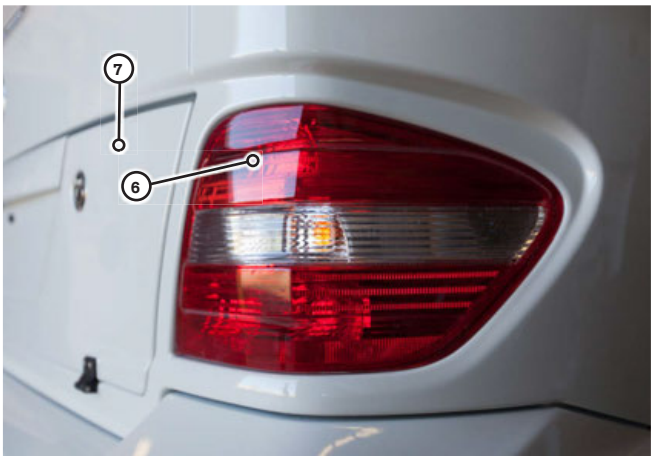

1. Open the rear compartment ⑦.
2. Remove screws ⑧.

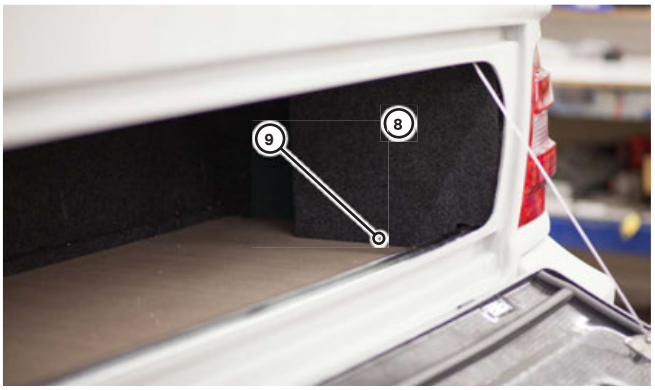

3. Remove the light compartment cover ⑨.
4. Remove the three screws from the side marker compartment ⑩.

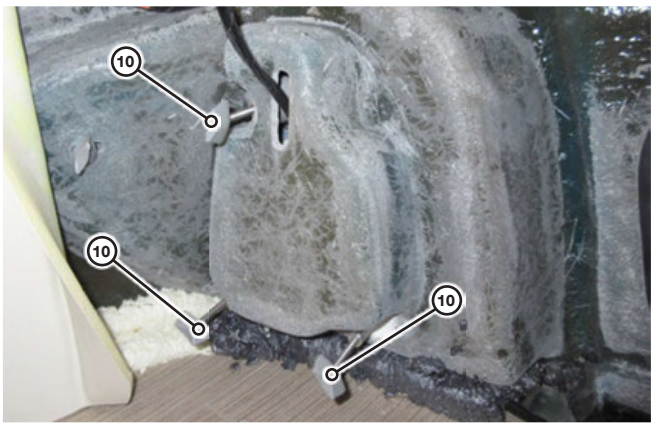

5. Disconnect the light assembly from the connector ⑪.

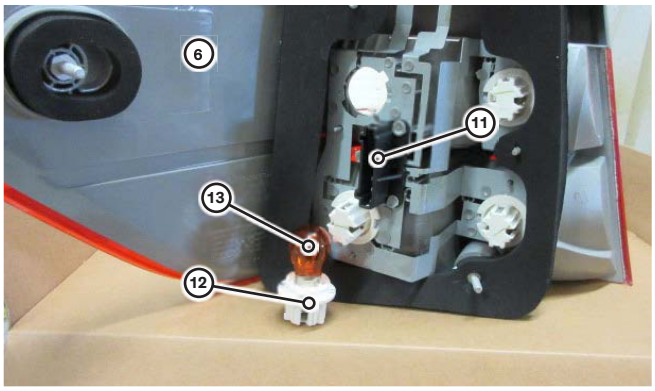

6. Remove the appropriate socket (12).
7. Remove defective bulb (13) and replace with new one.
8. Reinstall socket (12).
9. Reinstall the light assembly (6) by following Step 5 to Step 1 in reverse order.

EXTERIOR LIGHT (1)

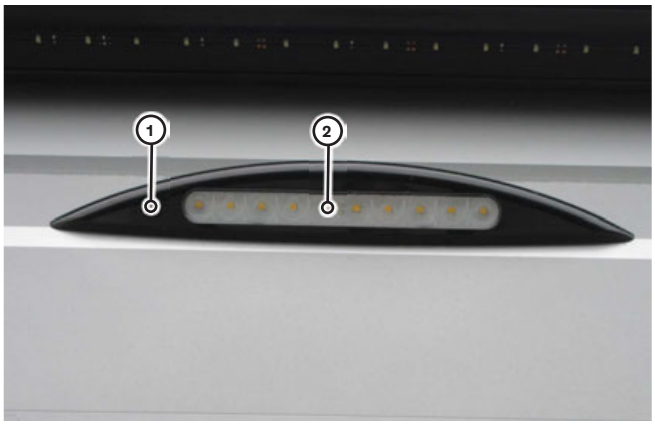

1. Unclip plastic cover (2).
2. Remove and replace light.
3. Install cover.

INTERIOR LIGHTING

CEILING AND OVERHEAD CABINET LIGHTS (3)

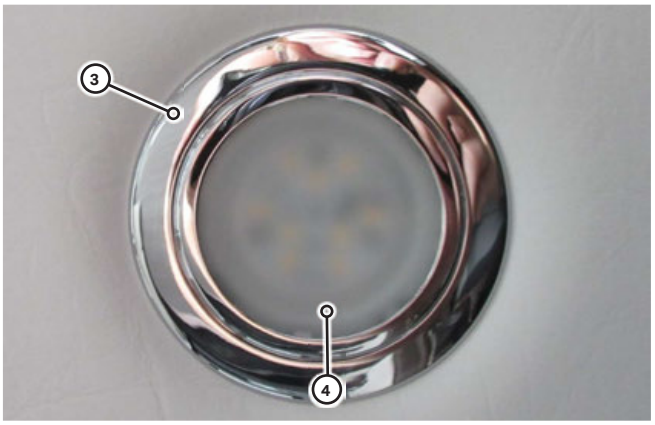

NOTE: This is a sealed LED unit and must be replaced as complete unit.

1. Pull down on the light fitting (4).
2. Install a new light into the opening.

⚠ NOTICE

LED lights are not serviceable. If any light stops working, have the entire light replaced by a qualified service technician.

READING LIGHTS (5)

The coach reading lights are not serviceable. If the reading light stops working, have the entire unit replaced by a qualified service technician.

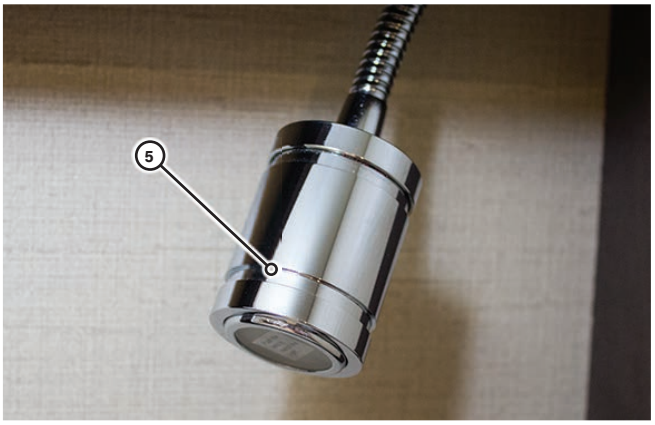

INTERIOR SHOWER LIGHT ⑥

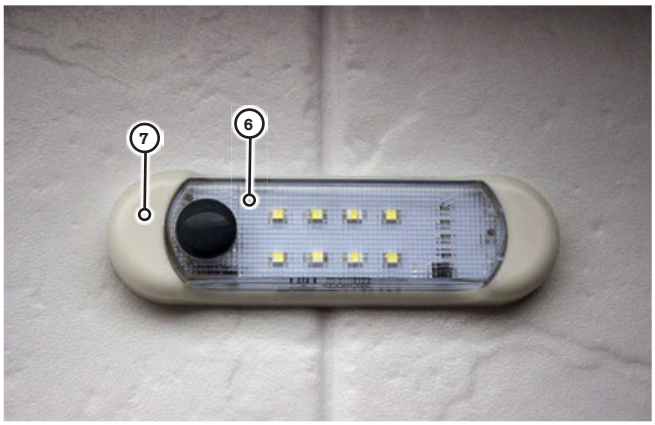

NOTE: This is a sealed LED unit and must be replaced as complete unit.

1. Unclip plastic cover ⑦.
2. Remove and replace light.
3. Install cover

EXTERIOR UTILITY CENTER LED LIGHT ⑧

The exterior utility center light ⑧ is controlled by the exterior storage and utility center light switch inside the coach. Refer to the “Exterior/Interior Light Switches” section in the “Motorhome Operation” section for instructions.

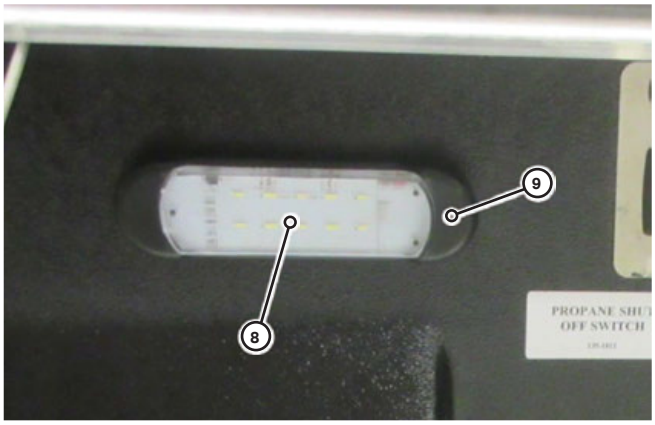

NOTE: This is a sealed LED unit and must be replaced as complete unit.

1. Unclip plastic cover ⑨.
2. Remove and replace light.
3. Install cover.

EXTERIOR UTILITY CENTER INCANDESCENT LIGHT ⑩

The exterior utility center light ⑩ is controlled by the exterior storage and utility center light switch inside the coach. Refer to the “Exterior/Interior Light Switches” section in the “Motorhome Operation” section for instructions.

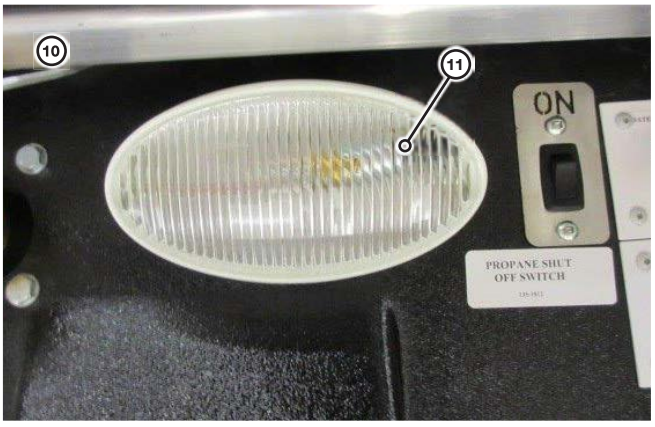

1. Unclip plastic cover ⑪.
2. Remove and replace light bulb ⑫.

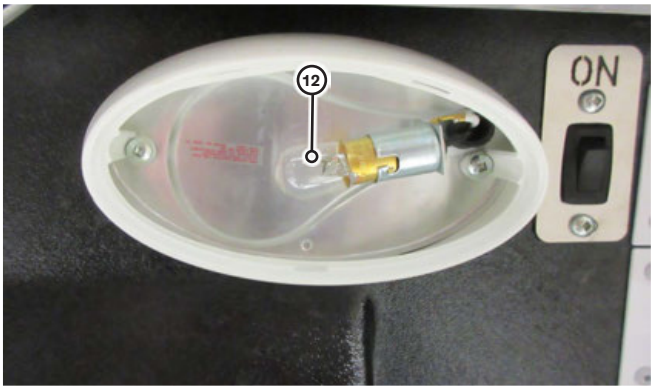



3. Re-install cover ⑪.

BAGGAGE COMPARTMENT LIGHT (13)

The baggage compartment light (13) is controlled by the exterior storage and utility center light switch inside the coach. Refer to the “Exterior/Interior Light Switches” section in the “Motorhome Operation” section for instructions.

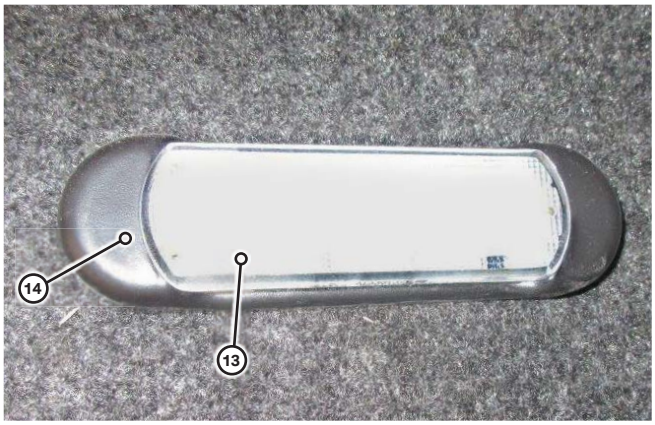

NOTE: This is a sealed LED unit and must be replaced as complete unit.

1. Unclip plastic cover (14).
2. Remove and replace light.
3. Install cover.

WATER AND PLUMBING SYSTEM

WATER SUPPLY

Your motorhome is designed with fresh water, grey water and black water systems and the associated plumbing to handle all of the water and waste water requirements. Review this section carefully to understand each system and how they function together.

FRESH WATER SYSTEM

The following two sources may supply fresh water to your motorhome:

- Fresh water tank - located under the unit in front of the rear axle on the driver's side with drain facing the rear.
- City water - a connection that supplies water to your motorhome through a hose

The fresh water tank system built into your motorhome provides full service similar to the system used in your home. A 12 volt DC self-priming pump draws water from the fresh water storage tank to all the cold water faucets and the water heater. An automatic pressure switch, located inside the water pump, maintains positive line pressure.

The city water connection ① and water fill selector valve ② are located in the rear utility center.

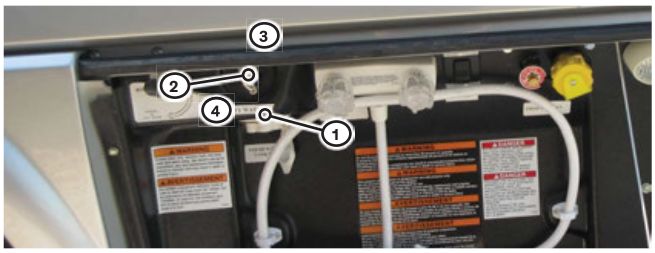

The water fill selector valve ② has the following two positions:

- City water ④
- Water tank fill ③

CITY WATER SUPPLY

The city water source supplies your motorhome's water system with water at pressure of the external source when the water pump is switched off.

CONNECTING THE EXTERNAL WATER SUPPLY

1. Press any water pump switch to turn off the water pump.
2. Attach a potable water hose to the city water connection ①. Turn the water fill selector valve ② to the city water position ④.
3. Turn on the city water supply.
4. Make sure water heater valves are set as shown below: Ⓐ, Ⓑ and Ⓔ should be open and Ⓒ and Ⓓ should be closed.

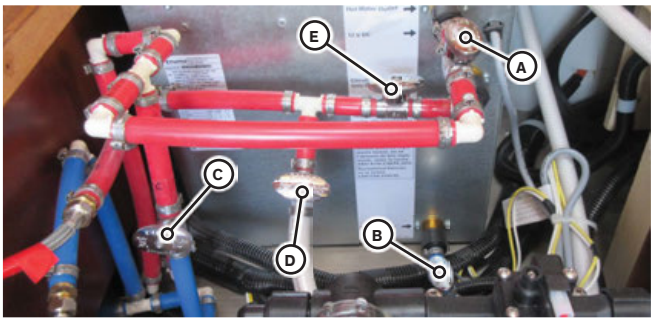

⚠ NOTICE

After connecting to the external water supply, open the faucets in your motorhome slowly and cautiously. Air trapped in the line can cause the water to splash into the sink. Drape a washcloth over the faucet to prevent excessive splashing.

DISCONNECTING THE CITY WATER SUPPLY

1. Turn off the city water supply.
2. Relieve the water pressure in the line by opening a faucet in the motorhome.
3. Disconnect the hose from the city water connection ①.
4. Replace the protective plug over the city water connection ①.

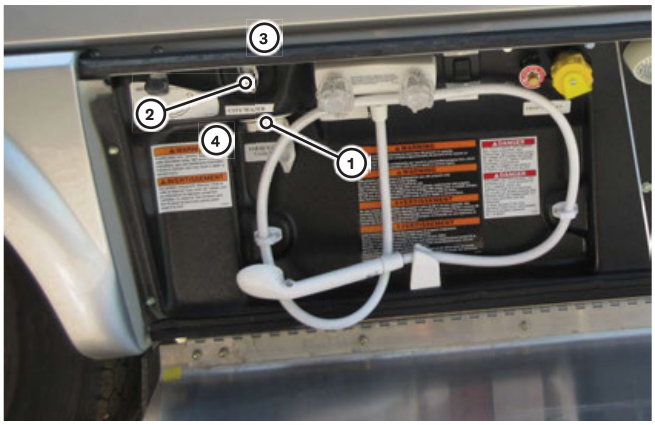

FILLING THE FRESH WATER TANK

CITY WATER

1. Connect the water hose to the city water connection ①.
2. Turn the water fill selector valve ② to water tank fill ③.
3. Turn on the city water supply.
4. Depress and hold the fresh water tank level switch ⑤ to show the percent-full level on the LED display ⑥. Once the fresh water level reads full on the LED display, turn off the city water supply.



5. Turn the water selector valve ② to the city water position ④.
6. Turn on the water pump switch ⑦ on the system monitor panel in the two door wardrobe.
7. Slowly open the cold water tap until the water runs smoothly. Repeat with the hot water taps.

⚠ NOTICE

Always turn off the water pump switch ⑦ if leaving the motorhome unattended for an extended period of time and when driving to prevent excessive damage and battery discharge in the event of a leak.

POTABLE WATER

When a city water supply connection is not available, fill the fresh water tank using the following procedure:

Fill a suitable water container with potable water. Place the suction hose ⑧ attached to the winterize by-pass valve into potable water container.

NOTE: The winterize by-pass valve ⑨ is located in the front driver's side dinette.



1. Turn the winterize by-pass valve ⑨ to "WINTERIZE" and water fill selector valve ② to water tank fill ③.
2. Turn on the water pump switch ⑦ on the system monitor panel.
3. Depress and hold the fresh water tank level switch ⑤ to show the percent-full level on the LED display .⑥ Once the fresh water level reads full on the LED display, turn off the water pump.
4. Turn the winterize by-pass valve ⑨ to "NORMAL FLOW" and the water fill selector valve ② to city water ④.

WATER PUMP SWITCH

To power the water pump one of the three switches needs to be turned on. The light (10) above the water pump switch (7) will light up. To shut down depress any switch, and the light (10) above water pump switch (7) should turn off. When the water pump is turned "ON" it will automatically activate when using the shower, toilet or any faucet. One of the water pump switches is located on the system monitor panel in the two door wardrobe. Additional switches are located in the bathroom (11) and in the rear utility compartment (12).





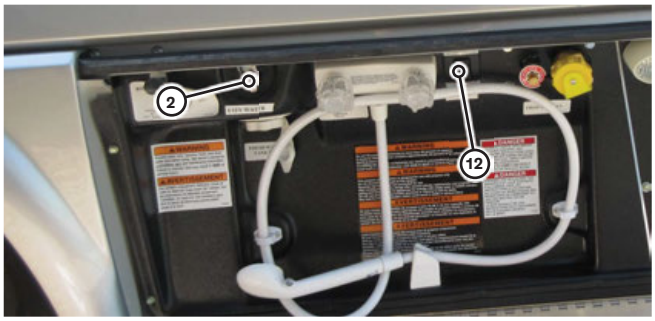

DISINFECTING THE WATER TANK

Periodically disinfect the fresh water system. Disinfect when the system is new or has not been used for an extended period of time. Disinfect the water tank as follows:

1. Prepare a solution of 1/4 cup household bleach to 1 gallon of water.
2. Place the suction hose (13) attached to the winterize by-pass valve (14) into the potable water container.



NOTE: The winterize by-pass valve (14) is located in the dinette behind the driver's seat.

3. Turn the winterize by-pass valve (14) to "WINTERIZE."
4. Turn on the water pump switch (7) on the system monitor panel located in the two door wardrobe. Turn water selector valve (2) to fill.
5. Fill the tank with fresh water. Run water from each hot and cold faucet until you detect a chlorine odor.
6. Leave the solution in the system for at least four hours. To reduce the waiting time to only one hour, double the concentration of household bleach in your solution.
7. After the required time has elapsed, drain and flush the system with fresh water.

WATER PUMP

The water pump ① is designed to supply on-demand water from the fresh water tank to the various water and plumbing systems in your motorhome. When a faucet is opened, the pump comes on automatically and pressurizes the various water lines.

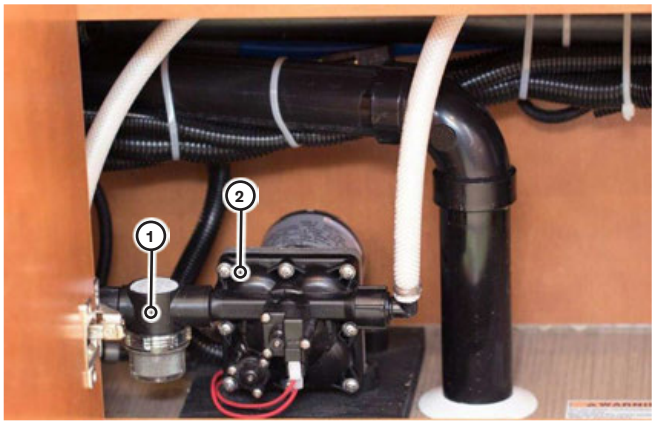

⚠ NOTICE

Periodically check the screen ③ on the intake side of the water pump .① Clean or replace the screen at least annually to ensure proper water pressure. Unscrew the filter bowl ② to access the screen, remove the screen and clean with fresh water. Replace in reverse order, ensuring the filter bowl is securely tightened. Refer to the water pump owner's manual located in the Motorhome Information Kit for further information.

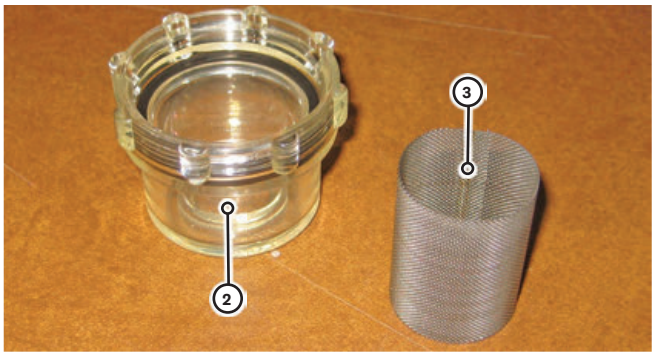

WATER PUMP INITIAL STARTUP

1. Make sure all drain valves are closed.
2. Turn off the water pump switch ④.
3. Fill the water tank.
4. Open the hot and cold faucets.
5. Turn on the water pump switch ④.
6. Close each faucet (hot and cold) as soon as water flows steadily through the faucet.
7. Verify that the water pump stops after closing all faucets.
8. The water pump is now ready for automatic operation.

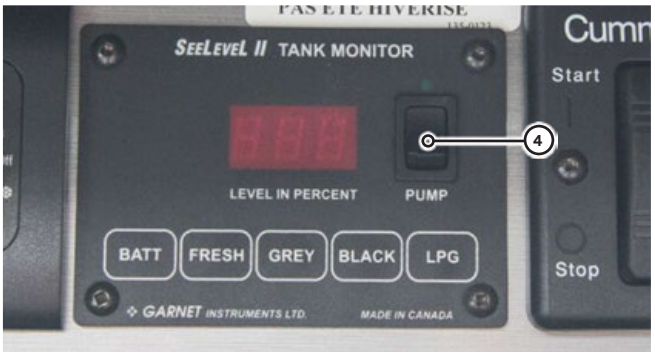

WATER PUMP TROUBLESHOOTING

IF THE PUMP WILL NOT PRIME

1. Make sure there is water in the tank.
2. Make sure the chassis battery is not discharged.
3. Make sure there are no kinks or obstructions in the inlet hose.
4. Make sure all inlet fittings and connections are air tight.
5. Make sure water selector valve ⑤ in the exterior utility center is set to "NORMAL POSITION" ⑥ as shown.

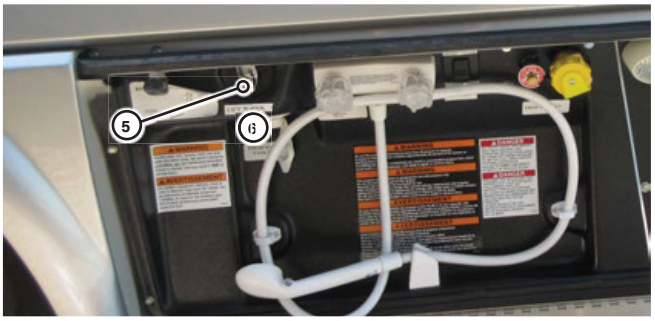

6. Check for clogged screens.

IF WATER PRESSURE DROPS

1. Check faucets and connections for leaks.
2. Make sure faucet aerators and filters are clean.
3. Make sure there is water in the tank.
4. Make sure the chassis battery is not discharged.
5. Make sure the water pump screen is not clogged.

IF PUMP RUNS WHEN THERE IS NO DEMAND FOR WATER

1. Make sure all faucets and fixtures are shut off and are not leaking.
2. Check all lines for leaks.
3. Make sure there is water in the tank.
4. Make sure no air is trapped in the system.
5. Make sure the tank fill water selector valve ⑤ is set to “NORMAL POSITION” ⑥ as shown.

WATER PUMP ELECTRICAL DIAGRAM

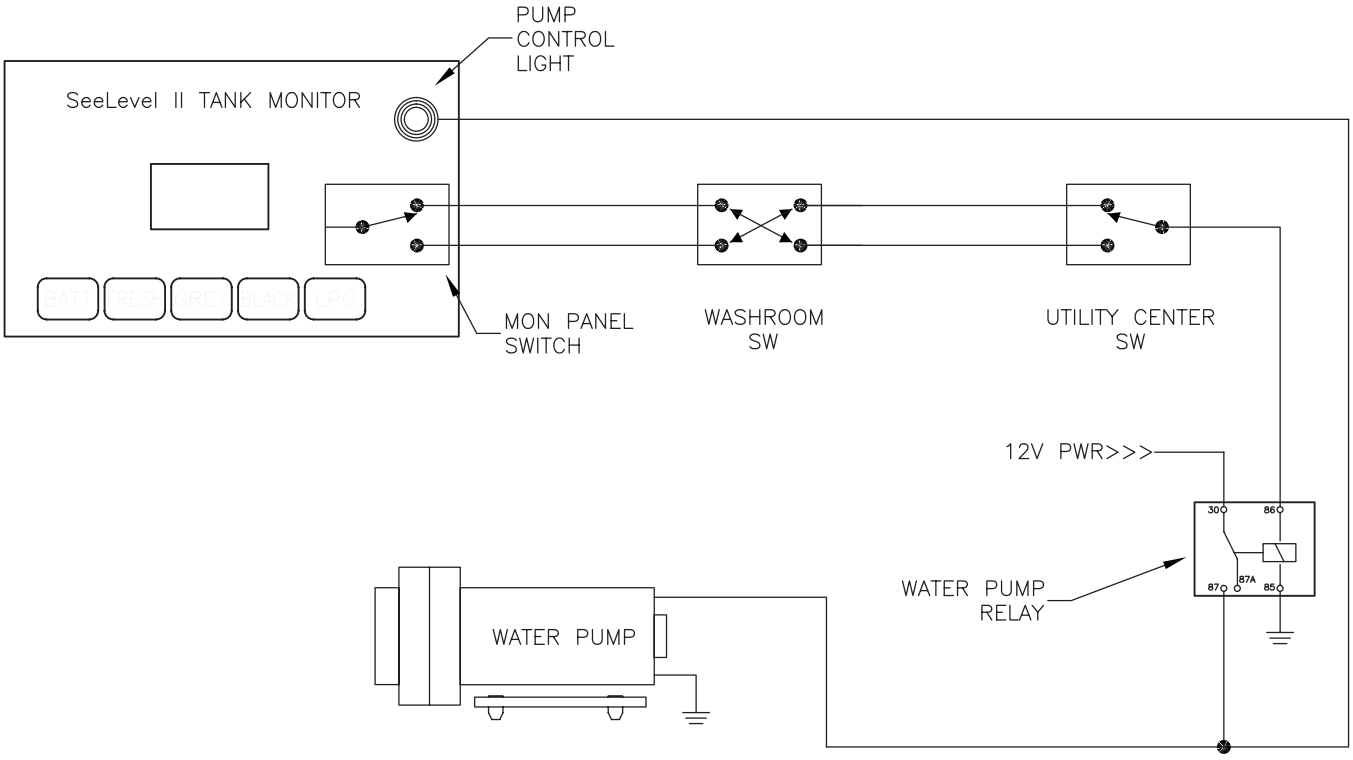

DRAINING THE FRESH WATER SYSTEM

To drain the fresh water tank ,① open the fresh water tank drain valve ② located on the underside of the coach between the frame rails.

NOTE: If the drain valve is located internally, the drain hose is routed outside through the floor.

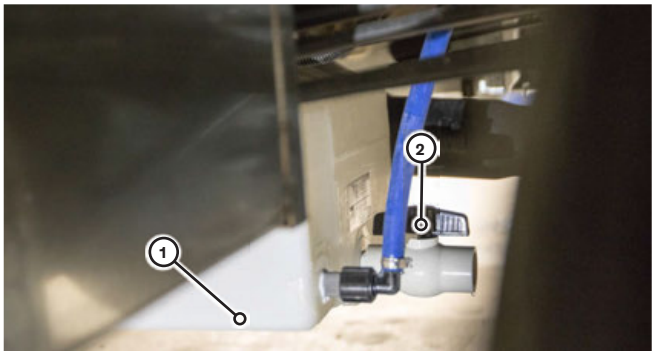

DRAINING THE HOT AND COLD WATER SYSTEMS

1. Disconnect the city water supply if connected
2. Turn off the water pump at any water pump switch.
3. Open all coach faucets.
4. Open the exterior shower faucets ③ (this is the lowest drain).The exterior shower faucet is located in the rear utility center.

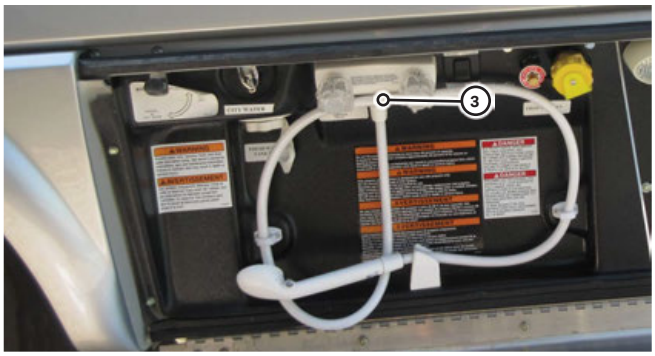

WATER FILTER

The water filter ④ is located in the rear storage compartment. Replace the water filter at least annually to ensure water quality. To replace the filter, unscrew the canister and replace the filter. Refer to the water filter manual located in the Motorhome Information Kit for further information.

NOTE: Your entire water system gets filtered through the water filter ④.



WASTE SYSTEMS

GREY WATER WASTE HOLDING TANK

The drainage from the kitchen sink and shower pan is collected in a separate grey water holding tank. This tank has its own dump valve which ties into the same termination valve outlet as the waste holding tank.

To display the grey water holding tank level, depress and hold the grey water tank level switch ⑤ to show the percent-full level on the LED display ⑥.

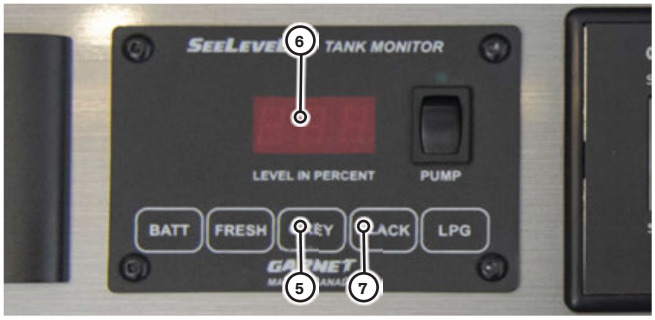

⚠ NOTICE

Overfilling the grey water holding tank could cause the overflow to back up through the shower drain.

BLACK WATER WASTE HOLDING TANK

The black water holding tank collects all the waste from the toilet and bathroom sink. Before using your waste holding tank, deodorize it by adding one gallon of water and a commercial holding tank deodorizer into the toilet.

To display the black water holding tank level, depress and hold the black water tank level switch ⑦ to show the percent-full level on the LED display ⑥.

⚠ NOTICE

Overfilling the black water holding tank could cause the overflow to back up through the toilet.

DUMPING HOLDING TANKS

1. Connect the sewer hose ① to the tank outlet located on the rear driver's side underbody. The sewer hose is stored on the driver's side in front of the rear mask. Open cover ② to access hose.

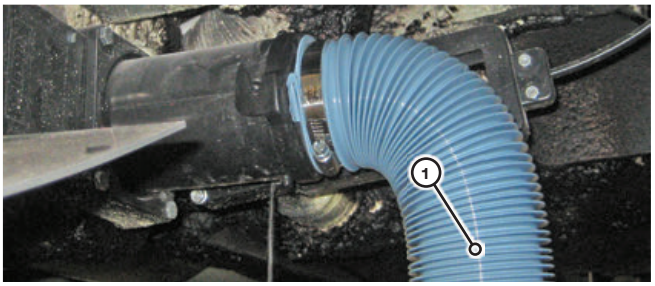



2. Pull the black water tank dump valve handle ③ first, then pull the grey water tank dump valve handle ④ . Push in the handles when you no longer hear or feel waste water flowing through the sewer hose.





BLACK WATER WASTE TANK RINSE

The motorhome is equipped with a black water waste tank flushing system to improve draining and to reduce odor. To flush the tank, follow these steps:

3. Remove the protective cap and connect the city

water supply hose to the connector ⑤ located in the exterior utility center.

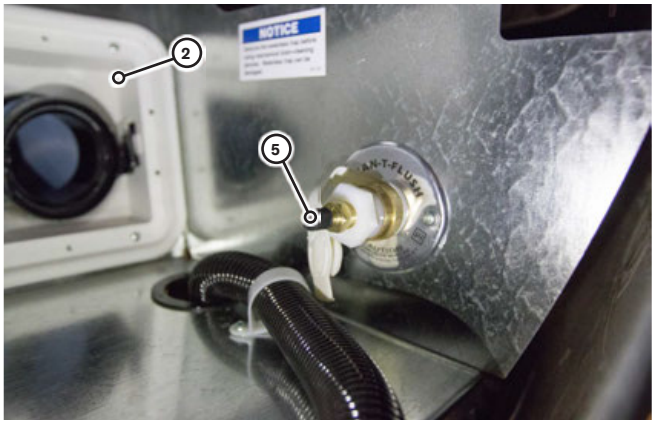

4. Open the black water tank dump valve ③.

⚠ NOTICE

Always open the black water tank dump valve before turning on the water supply.

5. Turn on the city water supply to thoroughly flush the system.
6. Turn off the city water supply, disconnect the city water supply hose and install the protective cap on the connector ⑤.
7. Close the black water tank dump valve ③.

NOTE: The black water tank flush line incorporates a non-return valve ⑥, which prevents black water contamination of the city water supply hose. If city water does not flow when connected as above, the non-return valve may be defective and require replacement. The non-return valve is located behind the shower faucet. Remove the shower faucet for access.

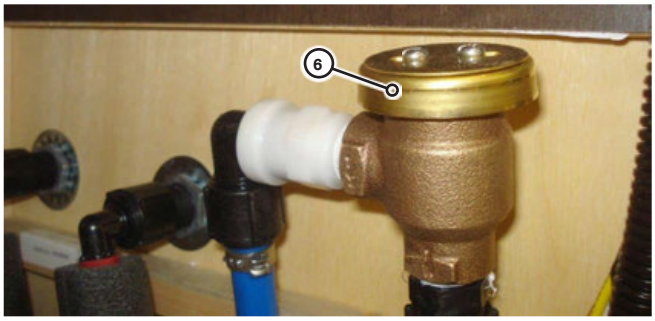

MACERATOR

Your motorhome may be equipped with a macerator ⑦. The macerator breaks down the solid matter in the black water holding tank.

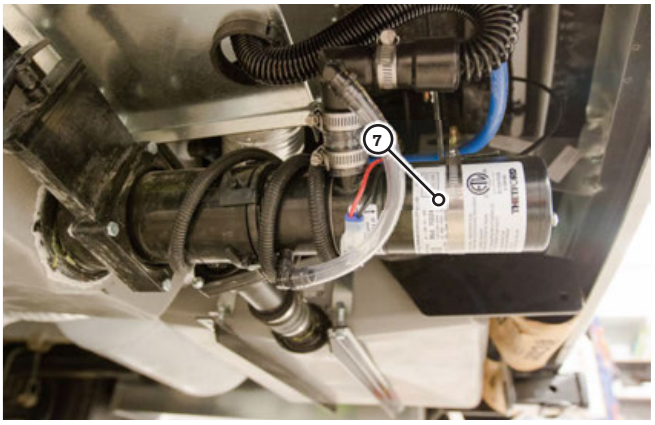

DUMPING HOLDING TANK WITH MACERATOR

1. Remove the cap from the sewer line and remove the macerator waste hose located in the rear driver's side utility compartment. Connect the macerator waste hose to the sewer line and a sewer hook-up.

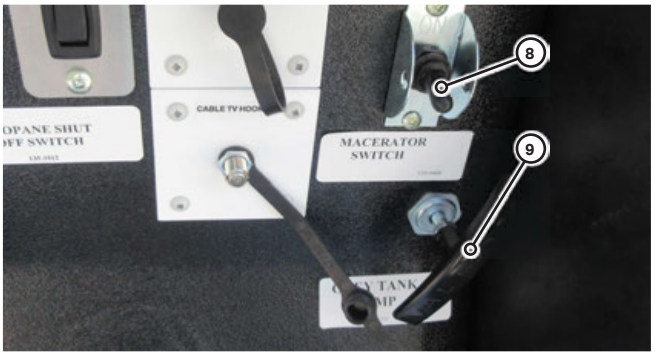

2. Open the black water tank dump valve ③ (to the rear of the sewer line).
3. Turn on the macerator pump switch ⑧.
4. While emptying the black water tank, open the grey water tank dump valve ⑨.
5. Turn off the macerator pump switch ⑧ and close the black water tank dump valve ③ and the grey water tank dump valve ⑨ when both tanks are empty. Replace the sewer line cap, rinse the macerator waste hose and return the hose to the rear driver's side utility compartment.

Refer to the macerator manual located in the Motorhome Information Kit for further information.

WASTE WATER HOLDING TANK DO'S AND DON'TS

DO keep your holding tank clean using a cleaning agent approved for recreational vehicle sanitation systems.

DO add a special deodorizer or chemical additive approved for recreational vehicle sanitation systems to reduce odor and help break down waste.

DO keep both tank dump valves closed to enable the tanks to fill before emptying.

DO keep both tank dump valves closed and the drain cap tightly in place while traveling.

DO use soft, single-ply, non-dyed, biodegradable toilet tissue.

DO open the shower room vent to provide fresh air and reduce excessive moisture buildup.

DO keep all roof vents and windows closed when traveling to prevent odors caused by negative pressure.

DON'T put facial tissues, paper, permanent (automotive) antifreeze, sanitary napkins or household toilet cleansers in your holding tank.

DON'T put anything solid in your holding tank that could scratch or damage the plastic components.

DON'T use any mechanical drain cleaning devices unless the in-line trap has been removed.

USING ON-SITE SEWER HOOK-UPS

When staying at a campsite where sewer hook-up is available, the sewer hose may be attached and left in place for the duration of the stay.

Do NOT leave the dump valves open. Open the dump valves only when the tanks are full, or when you are ready to leave the campsite. This will keep solid wastes in suspension allowing them to drain with the liquids when you open the valves. If the valves are left open, the liquid waste will drain, leaving the solids to collect on the floor of the black water holding tank. If solids collect, close the valves, fill the tank with water and drive a few miles. You can also help clean the tank by adding 1/4 cup of dish detergent to the water. The motion of the vehicle and the water will help dislodge the wastes and allow the tank to drain in the usual manner.

WATER HEATER

WATER HEATER OPERATION

The water heater is accessible from outside the coach. The water heater is designed to operate on LP gas only to provide hot water on demand.

⚠ NOTICE

Make sure the city water supply is turned on or the fresh water tank fill level is adequate for use.

⚠ CAUTION

Do not cover or obstruct exterior water heater vent.

OPERATION

1. Remove the water heater exterior cover ① by turning the latch ② counter-clockwise.

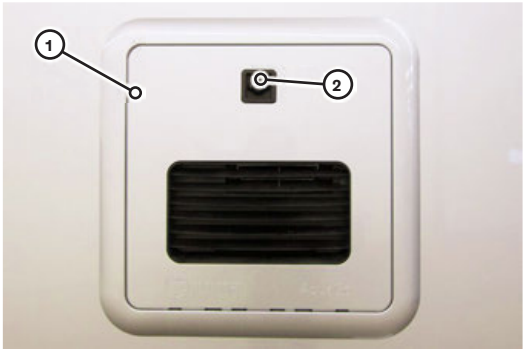

2. Ensure the water heater pressure relief valve ③ is closed.

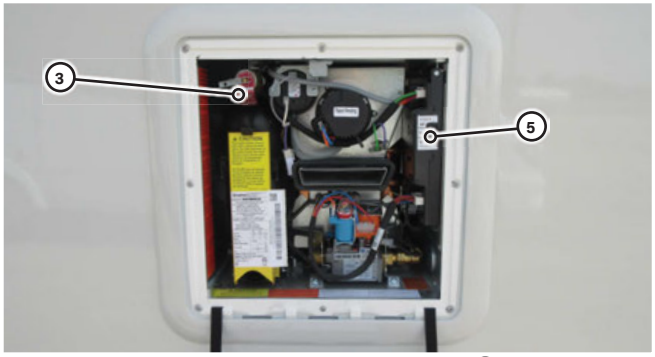

3. Turn the propane “shut off” switch ④ to ON.

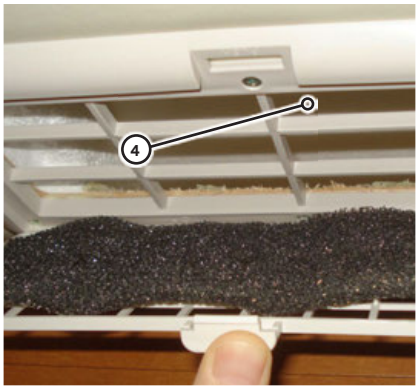



4. Press the exterior water heater switch ⑤ either up or down to turn on.
5. Ensure the water heater valves ⑥ are in the position shown for normal operation.

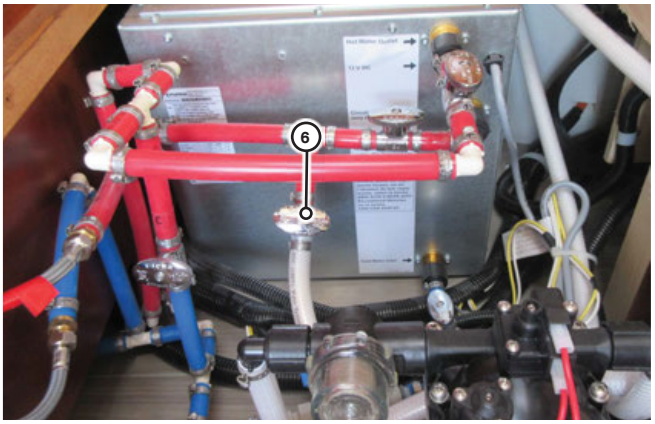

⚠ NOTICE

Always refer to the owner’s manual for the water heater (included in your Motorhome Information Kit).

WINTERIZING

Refer to the water heater operating instructions located in the Motorhome Information Kit for detailed winterizing procedures.

SWITCHING ON THE APPLIANCE

1. Open the access door.
2. To switch on the appliance, switch the POWER switch to one of the two “ON” positions. Both ON positions on the POWER switch have the same function. Choose your preferred position.
   - When the green power ON LED ① is lit, the appliance is switched on.
   - If the red error code LED ② is lit or flashes, there is a fault or warning.

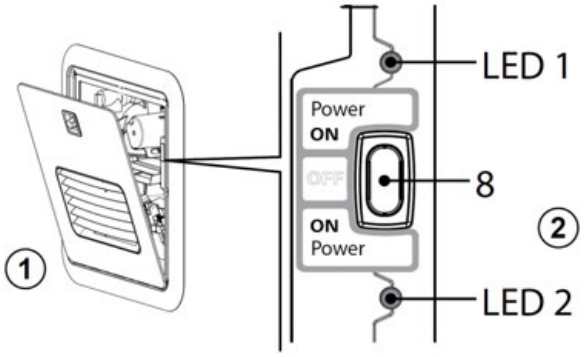

The appliance is now ready for using the control panel inside your vehicle.

OPERATING MODES

AquaGo® comfort / AquaGo® comfort plus feature a control panel to select the operating mode.

LED ROTARY SWITCH

With the rotary switch you can choose between the following operating modes:



OPERATING MODE / DESCRIPTION

ECO ①

The appliance is now running in energy-saving mode.

- Water temperature at outlet is approximately 120 °F (49 °C).
- Prevention of freezing by using propane gas. The temperature in the appliance is automatically kept above 41 °F (5 °C) .
- During operation, the yellow status LED 3 is lit

COMFORT ②

The appliance is now running in a mode that provides rapid availability of hot water.

- Water temperature at the outlet is approximately 120 °F (49 °C).
- Stand-by heat.
- The temperature in the appliance is automatically kept above 102 °F (39 °C).
- During operation, the yellow status LED 3 is lit.

OFF ③

Stand-by. The appliance is not running in any operating mode.

- The yellow status LED 3 is off.
- To switch off the POWER and gas supply.

DECALCIFICATION ④

Use to decalcify the hot water heater. Refer to the Truma manual for more information.

⚠ NOTICE

For safety reasons, after 30 seconds the decalcification process cannot be stopped until the system has been rinsed in accordance with the instructions.

WATER FIXTURES

FRESH WATER TOILET

The toilet in your motorhome operates much like a residential toilet except it uses much less water. Your motorhome is equipped with a manual flush toilet.

MANUAL FLUSH TOILET

Operating the Manual Flush Toilet
Push down the foot valve ⑤ to flush the toilet. A high-velocity stream of water produces a swirl effect to effectively cleanse the toilet. Use a deodorizing agent to eliminate toilet and holding tank odors.



Refer to the toilet operating manual in the Motorhome Information Kit for further details.

SPRAY NOZZLE

The manual flush toilet is equipped with a hand held spray nozzle ⑥.

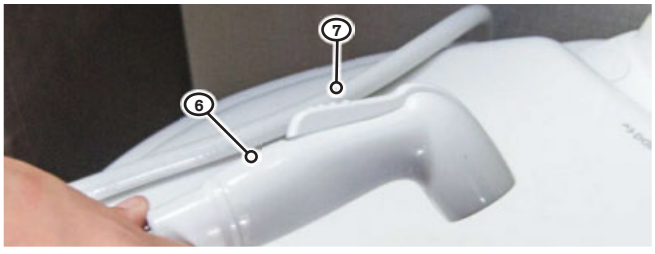

Press the lever ⑦ to activate the spray nozzle.

Refer to toilet operating instructions in the Motorhome Information Kit for further details.

MANUAL FLUSH TOILET OPERATING TIPS

1. Do not flush facial tissue or regular household toilet tissue down the motorhome toilet. It will not disintegrate properly and will cling to the sides and bottom of the holding tank, making it hard to clean. Use toilet tissue designed for motorhome toilets only.
2. Do not flush sanitary napkins or other non-dissolving items down the motorhome toilet.
3. Do not use automotive antifreeze or caustic chemicals such as household bleach in the toilet or holding tank. These liquids can damage plastic or rubber parts in the system.

CLEANING THE MANUAL FLUSH TOILET

1. Clean the toilet regularly for sanitary reasons and to ensure efficient operation.
2. Clean the toilet using a mild bathroom cleanser. Do NOT use caustic or abrasive cleansers. Do not allow cleansers to remain in the toilet bowl for any length of time or damage to plastic surfaces and seals could result.
3. Dump and rinse the black water holding tank after cleaning and flushing the toilet.
4. Add a small amount of deodorizing agent every few days to eliminate toilet and holding tank odors.
5. If the operation of the manual flush valve is diminished or becomes stiff, lubricate the toilet plunger. Keep the toilet plunger lubricated by leaving a small amount of water in the toilet or turning off the water pump, draining all the water from the toilet bowl and lubricating the plunger O-ring inside the toilet. Operate the valve several times to make sure it is operating freely.

Refer to the toilet operating manual located in the Motorhome Information Kit for details on preparing the toilet for cold weather storage. Also refer to the “Storage and Winterization” section of this manual for further details.

SHOWERS

HOT WATER

This standard water tap controls the flow of hot water to the shower head. Turn clockwise to turn off the water, and counterclockwise to turn on the water.

COLD WATER

This standard water tap controls the flow of cold water to the shower head. Turn clockwise to turn off the water and counterclockwise to turn on the water.

INTERIOR SHOWER

Your motorhome is equipped with a full shower unit (8). Lock the shower doors while in transit.



EXTERIOR SHOWER

Your motorhome is equipped with an exterior shower unit (9) located in the exterior utility center.

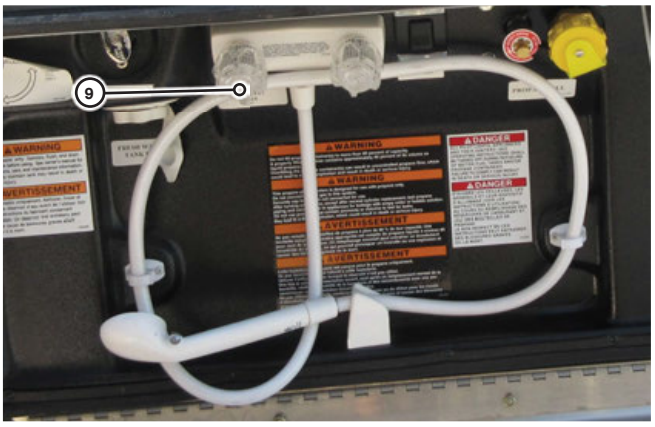

SHOWER HEAD

This standard flexible hose shower system is mounted in the exterior utility center. Turn the handle and lift the head to use it.

LIQUID PROPANE GAS SYSTEM

LP (Liquid Petroleum) Gas is a colorless gas compressed into liquid form for easy transportation and storage. It is the energy source for your range, oven, furnace, hot water heater and an alternate energy source for your refrigerator. LP Gas is an excellent fuel source that is safe and economical when used properly.

⚠ WARNING

These instructions are provided as a general guideline only. To ensure proper service and safety, always take your motorhome to a qualified service center.

LP GAS CONTROL VALVE

The LP Gas control valve ①, located in the exterior utility center, opens and closes the LP Gas valve. If there is no 12 volt DC power available in the motorhome, the LP Gas valve will automatically close.

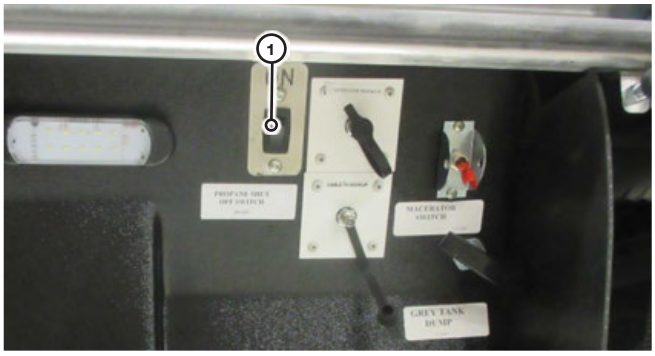

SAFE USE OF LP GAS

The LP Gas system is designed and built to adhere to federal government and industry regulatory requirements.

Many safety devices and backup systems have been installed in your motorhome to improve safety and reliability. These devices and systems include the following: LP Gas tank overflow valves, LP Gas detectors, and carbon monoxide (CO) detectors. In addition, although LP Gas is naturally odorless, LP Gas contains an odor additive so it can be more easily detected.

⚠ WARNING

Do not tamper with any part of the LP Gas system, piping or regulator. Service and maintenance must be performed by a qualified service center.

PRECAUTIONS FOR THE SAFE USE OF LP GAS

1. Familiarize yourself with the odor of LP Gas. If you suspect a leak, immediately turn off the LP Gas supply and have qualified service center determine the source of the leak.
2. Check the entire system for leaks every time the tank is filled. Take time to regularly inspect the system for leaks.
3. Turn off the LP Gas supply valve when the LP Gas system is not used.
4. Do NOT fill the LP Gas tank above 80% of its maximum capacity. LP Gas requires room to expand within the tank.
5. Make sure all appliance vents are open and free of obstruction when using the LP Gas system.
6. When drilling holes in walls or attaching objects, be careful not to damage gas lines or electrical wiring.

HOW LP GAS WORKS

There are two types of LP (liquid petroleum) Gas: propane and butane. Both are compressed into a liquid state for easier transportation and storage. Common names used for LP Gas are tank gas, bottle gas, or simply LP.

In the tank, LP Gas is in liquid form and under very high pressure. As it is released, it changes to a vapor or gas and expands to a much greater volume.

Exercise caution when temperatures fall below -40 °F (-40 °C). Propane will not convert from a liquid to a gas in extremely cold temperatures, and LP Gas appliances will not function proper

SELECTING FUEL TYPES

Propane burns at a lower temperature and will convert from liquid to gas at temperatures as low as -40 °F (-40 °C). Butane is not recommended due to its high vaporization temperature 32 °F (0 °C). Using butane in cold temperatures may block the system and cause components to malfunction.

LP gas dealers typically provide only the type of gas commonly used and suited for the climate in their area. If you travel from a warmer to a colder region, verify that you have the appropriate type of LP Gas for the climate.

LP GAS TANK SYSTEM

The LP Gas storage tank is mounted underneath the motorhome and is attached to the vehicle floor. It is accessible only from outside the vehicle. Before turning on the LP Gas control valve ① located in the exterior utility center, make sure all controls for the various LP Gas appliances are in the “OFF” position to prevent any LP Gas from leaking into the motorhome. The LP Gas supply valve is operated by the LP Gas switch in the exterior utility center. The valve is held open using 12 volt DC power. If the battery is dead or the battery disconnect is in the “OFF” position, the LP Gas supply valve will automatically close.

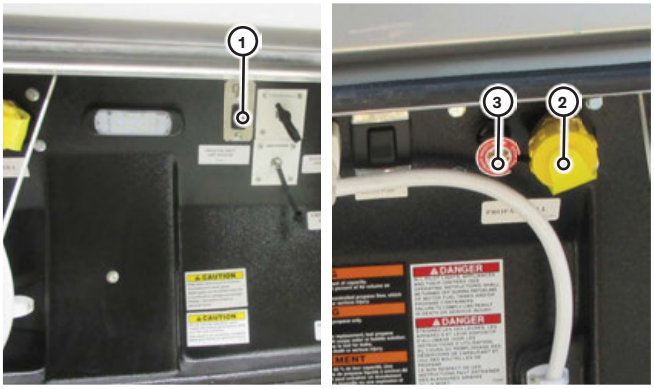

NOTE: The LP Gas storage tank is also equipped with a manually operated shut-off valve. Refer to the “Motorhome Maintenance” section of this manual for details.

REFILLING THE LP GAS TANK

1. Shut off the LP Gas control valve ① in the exterior utility center before filling the tank or traveling. Always refill an empty LP Gas tank as soon as possible.
2. Connect the LP Gas supply to the fill connector ②.
3. Do NOT overfill your LP Gas tank. Stop filling when liquid appears at the overflow valve ③(often called a 10% valve) which limits the liquid level to 80% of container capacity, allowing 20% for expansion.
4. Check the LP Gas level after refilling by opening the overflow valve and bleeding gas in a well-ventilated area until the white liquid stops emerging from the overflow valve. Overfilling may cause damage to the regulator and cause malfunction of LP Gas appliances.

⚠ NOTICE

The LP Gas tank has an automatic 80% stop-fill device to prevent overfilling of the tank. To prevent against overfilling, have the tank filled only by an authorized filling station.

The tank is permanently mounted to the motorhome, therefore, the motorhome must be taken to a fueling station for refilling. When liquid LP Gas appears at the overflow valve ③, the tank is full.

LP Gas stations are found in all parts of the country. Check the yellow pages in your telephone book or on-line if you have trouble finding a station. Look under "Gas - Liquid Petroleum - Bottled and Bulk" or "Propane."

⚠ DANGER

Do NOT smoke when refueling. Keep flames, sparks and smoking material away from fuel or flammable fumes.

⚠ DANGER

- **Never use an open flame to test for leaks.**
- **Never fill the LP Gas tank when either the engine or the generator is running.**
- **Keep all protective covers and caps in place.**

⚠ DANGER

Never carry LP gas or any other flammable liquid containers inside the living or driving areas of your motorhome. Gases may inadvertently be discharged into the confined space which could result in fire, asphyxiation or explosion.

⚠ WARNING

- **Never overfill the LP Gas tank. Make sure your motorhome is level when filling the tank.**
- **Make sure all pilot lights are off before refueling any of the gas tanks on your motorhome.**
- **Do not smoke or have any open flame in the area where refueling is taking place.**
- **Use a soap and water solution to test for leaks in the LP Gas system.**

⚠ WARNING

Remind the service attendant to use the 80% overflow valve when refueling. Space must be left in the tank for vaporization and expansion to occur.

AFTER REFILLING THE LP GAS TANK

1. Periodically check all container and line connections to be sure they are tight. Use soapy water when testing for leaks—do NOT use an open flame.
2. If you notice diesel or LP Gas fumes at any time, immediately determine and correct the source of the problem.
3. Before opening the LP Gas control valve in the exterior utility center, check that controls for all gas appliances are in the "OFF" position. An accumulation of LP Gas inside the motorhome could create a fire or explosion hazard.
4. Remember, LP Gas is potentially lethal if inhaled.

AIR IN THE LP GAS TANK

If your LP Gas appliances burn poorly or do not stay lit even though there is a sufficient fuel supply, there may be air trapped in the LP Gas tank. The air should eventually escape along with the LP Gas, but it may be necessary to have your LP Gas tank purged of air by your LP Gas dealer.

TRAVELING WITH LP GAS

⚠ NOTICE

In some jurisdictions it is illegal to transport LP Gas on certain roads or through tunnels. Check state or provincial regulations to make sure your trip will not be halted or impeded unexpectedly as a result of transporting LP Gas.

LP GAS TANK REGULATOR

The LP Gas tank regulator has a plastic cover to protect it from the weather. Only qualified service personnel are permitted to remove this cover.

The pressure regulator has a vent hole on the underside. Make sure this vent hole is open and not obstructed in any way.

An LP Gas regulator may freeze in extremely cold temperatures. This may result from a small amount of moisture in the fuel, even though LP Gas dealers take precautions to prevent this from happening. Keep the LP Gas control valve closed when not in use, even when the LP Gas tank is empty. This helps to prevent condensation from forming and helps to prevent freezing. If necessary, hold a light bulb near the regulator to thaw it.

If moisture in the LP Gas tank is a recurring problem, ask your LP Gas dealer to inject a small amount of dry methyl alcohol into the tank to absorb the moisture.

LP Gas vaporizes quickly and easily in warmer temperatures. In colder conditions, this vaporization process significantly slows down. When large amounts of fuel are required, when using the furnace for example, the fuel may not vaporize rapidly enough to keep all the appliances operating at a high level. In this case, you may have to reduce the consumption of fuel by lowering the temperature setting on the furnace, reducing the consumption of hot water, turning down the temperature setting on your refrigerator, or switching from LP Gas to electric power if possible.

The LP Gas regulator pressure is preset. Do NOT attempt to adjust it. Adjustments must only be performed by an authorized service center. Do NOT expose the regulator to the elements.

If the LP Gas regulator fails, the LP Gas tank may be overfilled or impurities may mix with the propane. Regulator failure could cause LP Gas components to malfunction.

⚠ CAUTION

Do not use an open flame or a heat lamp to thaw the regulator.

LP GAS LEAKS

Read, understand and follow the safety label affixed near the range area in your motorhome's galley. Do NOT remove this label. If you ever smell LP Gas inside the vehicle or if the detector alarm sounds, carefully follow the instructions on the label.

Road vibration can loosen propane fittings. Check the propane system for leaks at least every 5000 miles (8000 Kms) and whenever the tank is refilled. Have the entire propane system inspected annually by qualified service personnel regardless of the number of miles driven.

1. Read, understand and follow safety labels, signs and directions in the motorhome.
2. Use soapy water to check for leaks and watch for bubbles. Never use an open flame.
3. Correct or repair leaks before using appliances or operating the vehicle.

⚠ DANGER

If you smell propane, follow these steps:

1. **Extinguish all open flames, pilot lights and smoking materials.**
2. **Do NOT touch any electrical switches.**
3. **Shut off the propane supply at the tank valves or propane supply connections.**
4. **Open doors, windows and vents.**
5. **Leave the area until the odor clears.**
6. **Have the propane system checked and repaired by a qualified service technician before using the LP Gas system. Failure to comply could result in asphyxiation, fire or explosion causing serious injury or death.**

AVOIDING ASPHYXIATION

1. Do not use portable fuel-burning equipment such as wood or charcoal grills, heaters or stoves inside the motorhome. The use of this equipment can produce deadly carbon monoxide gas or cause fires.

⚠ WARNING

Do not bring or store LP Gas containers, gasoline or other flammable liquids inside the motorhome because a fire or explosion may result.

⚠ WARNING

Do not use materials that contain ammonia or chlorine to check for LP Gas leaks.

2. Ensure there is proper ventilation before using the gas range to prevent asphyxiation. Do NOT use the range to heat the motorhome. Long term use of these appliances for space heating increases the chance of asphyxiation. Open the overhead vent and open a window before using the range.
3. Avoid breathing the exhaust fumes from gas or diesel engines and LP Gas burners. Poisonous exhaust fumes are produced from operating the motorhome or generator engine, stove, oven, refrigerator, furnace and hot water heater. Position the motorhome so the wind blows exhaust fumes away from the motorhome. Ensure proper ventilation and adequate air exchange when using LP Gas appliances to prevent a buildup of deadly carbon monoxide gas. Be sure all alarms are in proper working condition.
4. Do not run the motorhome or generator engine in a confined area such as a garage, except to remove the motorhome from the confined area.
5. Use the vent or air conditioning fan to force fresh air into the motorhome if the vehicle is not moving but the engine is running for more than just a few minutes.
6. Maintain engine and generator exhaust system components to prevent fumes from entering the motorhome. Check exhaust systems when changing oil, when exhaust system sounds change or when the underbody of the motorhome makes contact with an object or becomes damaged.
7. Close rear windows when driving to prevent drawing exhaust fumes into the motorhome.

NOTE: When the motorhome is new, some of the appliances will burn off paint or residue which has accumulated during production. You also may notice some odors from cleaners which will dissipate with use and ventilation.

MOTORHOME MAINTENANCE

EXTERIOR CARE AND MAINTENANCE

ROOF

The roof is manufactured with a bowed aluminum frame and constructed using a laminated 'sandwich' method. It is strong enough to support the weight of an average adult if it becomes necessary to repair the roof or any of the roof mounted components. Avoid carrying large heavy objects onto the roof. The additional strain of the weight, along with the movement of the motorhome, could cause damage to the roof. Check the roof regularly for possible leaks, especially the sealant around the vents, air conditioners, body-to-roof seams, etc. Immediately repair any suspected leaks. Any leakage could result in damage to the interior of the motorhome.

UNDERBODY

Mud and dirt mixed with corrosive materials used to control dust or ice on the roads can accumulate underneath your motorhome and cause premature deterioration and rusting. In addition, any build up will add unnecessary weight to the motorhome. Rinse and flush the undercarriage and the entire underbody every time you wash the motorhome.

WASHING, WAXING AND POLISHING

Damaging salts, calcium chloride, road tar, tree sap, insects and other foreign material can accumulate on the body of your motorhome. To reduce the harmful effects of these agents, wash the motorhome frequently and thoroughly using mild soap and warm water. Do not wash the exterior in direct sunlight and never use hot water. Avoid using pressure washers because they can loosen decals and sealants. Regularly wax your RV to reduce the negative effects of UV exposure on the exterior fiberglass parts.

Carefully inspect all caulking around windows, doors, vents and all other joints. Re-caulk if necessary using the correct caulking material available from a qualified service center. If water fails to bead on the surface of the motorhome, it is time to polish and wax it.

This will not only improve the appearance of your motorhome, but will also protect the painted surfaces from oxidation and corrosion making it easier to wash.

⚠ NOTICE

These instructions are provided as a general guideline only and may not be complete. To ensure proper service and safety, always take your motorhome to a qualified service center.

⚠ NOTICE

Please refer to the "How to Maintain and Care for your Exterior Finish" document in the Motorhome Information Kit for further instructions.

STRIPES AND DECALS

Follow these steps for the care and maintenance of your motorhome's stripes and decals:

- Wash with mild soap and warm water and rinse thoroughly.
- Never wash using a high-pressure washer at close range. The force of the water can lift the edges of decals.
- Do not use solvents. They can smear the colors and damage the adhesive.
- Never use lacquer thinner or paint on decals.
- Avoid splashing gasoline or diesel fuel on stripes and decals and rinse immediately if splashing occurs.

EXTERIOR LIGHTING

Before each trip, inspect all clearance lights, identification lights, marker lights, stop lights, turn signal lights and backup lights. Immediately replace burned out bulbs. Use soap and water to keep all light lenses clean.

SOLAR PANELS

Solar panels should be cleaned monthly using water and a soft sponge or cloth. If required, a mild non-abrasive cleanser can be used for more stubborn residue. Ensure solar panels are rinsed thoroughly following cleaning.

For best performance, solar panels should be cleaned more frequently during drier months as they may become covered in dust more quickly. Use of a pressure washer to clean the solar panels is not recommended.

⚠ NOTICE

Solar panels contain acrylic (Plexiglas®) components. Refer to the acrylic manufacturer's cleaning instructions. Do NOT clean using Windex® style glass cleaners.

INTERIOR CARE

Dirt and dust accumulation can not only detract from the motorhome's appearance, but can also shorten the life of carpets and fabrics. Clean and vacuum weekly to keep your motorhome in pristine condition.

CARPETS

Refer to the carpet manufacturer's recommendations for carpet cleaning and care and for information about stain removal.

UPHOLSTERY

Use care when cleaning the motorhome's upholstery and choose an appropriate cleaner or spot remover to avoid damaging the materials. Regular vacuuming and wiping with clear water will remove most stains. Any major cleaning problems should be referred to a professional cleaning service.

⚠ NOTICE

Direct sunlight will fade upholstery and fabrics. To minimize fading, close drapes, blinds and shades whenever possible.

SPOTS AND STAINS

Most spots and stains can be removed using clear warm water. To prevent a stain from spreading, start from the outside of the stain and clean toward the center.

Stains such as lipstick, grease, ink or mustard are very hard to remove and might require the help of a professional cleaning service.

VINYL FABRICS

Clean vinyl surfaces using a soft, damp cloth and mild detergent. Never use solvents of any kind on vinyl surfaces.

NOTE: The vinyl manufacturer recommends the following: "To clean most common household stains use warm soapy water and a clear water rinse. For more stubborn stains, Fantastik™ or Mr. Clean™ diluted 3:1 with water are recommended."

DRAPERIES, CURTAINS AND BEDSPREADS

Draperies, curtains and bedspreads are made from a variety of fabrics and materials. Many of these materials could shrink up to 5 percent during the cleaning process. Always use a professional cleaning service for you motorhome's textiles.

⚠ NOTICE

Using water-based or detergent-based solvent cleaners on fabrics may cause excessive shrinkage and permanent stains.

WALLS

Clean walls using warm water and mild soap. For extensive accumulations of dirt and grime, add a small quantity of rubbing alcohol to the water. Do NOT use solvents or abrasives.

CABINETRY, TABLES AND COUNTERTOPS

The wood's beauty comes from the natural variations in grain and density. Some minor variations in color and shading are normal.

Sinks The sinks can be cleaned with warm water and soap. Wipe dry to avoid streaks. For stubborn stains, a mild abrasive may be necessary. Always work in the direction of the polish lines.

⚠ NOTICE

Some units contain acrylic (Plexiglas®) components. Refer to the acrylic manufacturer's cleaning instructions. Do NOT clean using Windex® style glass cleaners.

REFRIGERATOR

Clean the refrigerator interior regularly. Remove the shelves and wash inside the refrigerator using warm water and mild soap. Dry thoroughly, especially around door frame and door gasket. Use only warm water to clean the cooling evaporator, ice trays and shelves. Never use strong chemicals or abrasive cleaning materials on any part of the refrigerator cabinet. Refer to the refrigerator manual in the Motorhome Information Kit for additional information.

STOVE TOP - GENERAL

Clean the stove top as soon as it cools using warm water and a mild detergent solution. Clean the stove top regularly to help keep the appliance looking and operating like new.

STOVE TOP - BURNERS

Clean the stove top burners (caps and grates) after they have cooled using warm water and a mild detergent solution. Clean plugged burner ports with a toothpick. Do NOT clean burner ports using metal objects of any kind because it could enlarge the port.
If washing a cap or grate in the sink, dry it immediately by shaking off all excess water, reinstalling it onto the stove top and lighting the burner until all water evaporates.

MICROWAVE/CONVECTION OVEN

Keep the door and inside of your microwave/convection oven clean. Do not allow grease, spatter or solid matter to build up. An accumulation of solid matter can absorb microwave energy and increase cooking time. Clean the microwave/convection oven as follows:

- Wipe walls with a damp cloth and mild detergent to remove spatters and spills. Do not use harsh detergents or abrasives.
- Clean the outside surface of the oven with soap and water. Rinse and dry with a soft cloth. Do NOT allow water to enter the oven's ventilation openings to avoid damaging the oven's internal components.
- If the control panel becomes wet, clean it with a soft dry cloth. Do not use harsh detergents or abrasives on the control panel. When cleaning the control panel, leave the oven door open to prevent the oven from accidentally turning on. After cleaning, touch the cancel pad to clear the display window. Remove the glass tray for cleaning. Wash the tray in warm soapy water or in a dishwasher.
- Refer to the microwave/convection oven manual in the Motorhome Information Kit for further details.

BATHROOM - GENERAL

Use warm water and mild soap to clean the walls and surfaces in your bathroom. Clean mirrors using a good-quality glass cleaner. Do NOT use harsh cleansers, detergents or abrasives.

TOILET

Refer to the toilet manual in the Motorhome Information Kit for cleaning and care instructions.

DOORS AND WINDOWS

Periodically lubricate the door locks and hinges with powdered graphite for smooth operation and protection from freezing. Clean windows using a good-quality glass cleaner. If cleaning ice from windows, use a plastic scraper and avoid damaging the seals and sealant along the edge of the windows.

STORAGE AND WINTERIZATION

Inspect all systems, components and appliances prior to storing your motorhome.

STORAGE CHECKLIST

1. Fill the motorhome fuel tank to reduce excessive moisture buildup.
2. Check coolant level and add antifreeze if necessary. Use an appropriate coolant/water ratio that will protect to the lowest temperature expected during the storage period.
3. Change the engine oil to the recommended viscosity to aid with cold weather starting.
4. Park the motorhome as level as possible.
5. Ensure the battery has a full charge, then disconnect both the chassis and coach batteries using the battery disconnect switch. Charge the batteries monthly with a trickle charger or smart charger.
6. Wash the motorhome. If exposed to road salts, thoroughly wash and flush the exterior and undercarriage.
7. Remove all perishable items and anything that can freeze (canned goods, medicine, etc). Leave the refrigerator door ajar. Ensure all controls are turned off.
8. Ventilate the living area by opening drawers, cabinets, closets, etc.
9. Drain the grey and black water holding tanks, toilet and living area water system. Deodorize and allow to dry. Turn off the water heater. Drain the fresh water tank and water heater. Refer to the "Cold Temperature Storage" section in this manual for winterizing procedures.
10. Turn off the LP Gas tank valve switch ①.

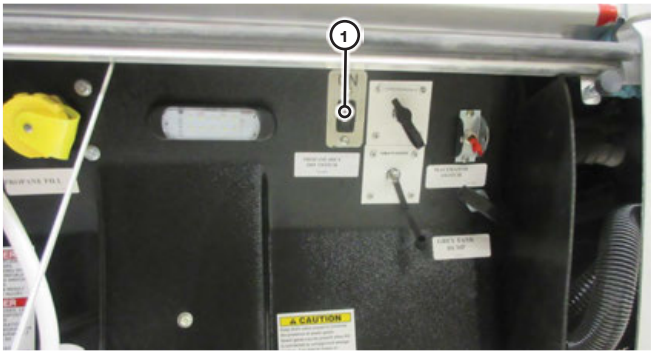

COLD TEMPERATURE STORAGE

WATER SYSTEM WINTERIZATION - DRAINING

1. Drain the fresh water tank by opening the fresh water tank drain valve ②. Refer to the “Water and Plumbing System” section for location details.



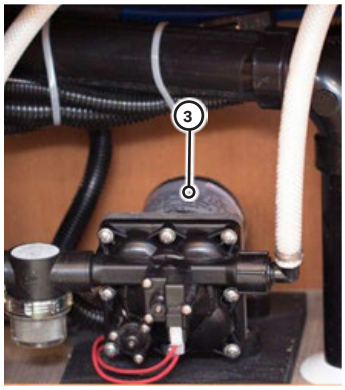

2. When the fresh water tank is completely empty, run the water pump for 1 minute to drain out any water remaining in the pump.
3. Remove the water filter screen ③ and clean. Re-install the clean screen.

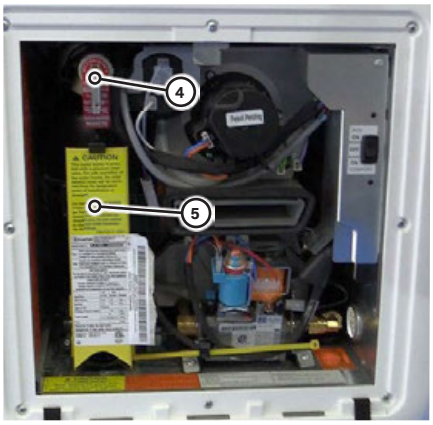



4. Drain the water heater by relieving the pressure at the pressure relief valve ④.
5. Unclip the Easy-Open drain lever ⑤ and remove filter screen ⑥. The filter should then be stored in a drawer ⑦ over the winter.

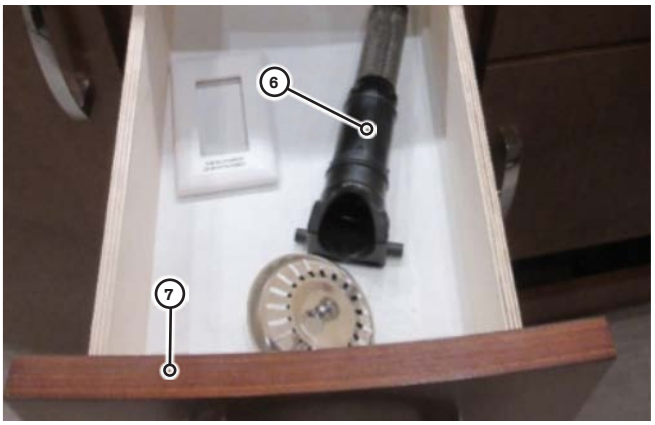

6. Attach the blow out plug to the city water hookup in the utility center.
7. Connect a compressed air line to the blow out plug.
8. Open all hot and cold water faucets, including the exterior shower, and blow out all water.

NOTE: Place filter/screen in a secure location during the storage period.

⚠ NOTICE

Do NOT depress the toilet flush pedal if there is air pressure in the system or damage to the toilet flush valve could result.

9. Disconnect the compressed air line and remove the blow out plug. Release air pressure by opening all faucets.
10. After releasing all air pressure from the lines, depress the toilet flush lever while an assistant applies compressed air into the blow out plug. Disconnect the compressed air line and remove the blow out plug. Release air pressure by opening all faucets.
11. Remove the water filter canister, empty any remaining water and reinstall the water filter canister.
12. Drain the black and grey waste holding tanks.
13. Add approximately 1 cup of non-toxic plumbing antifreeze to the kitchen sink, bathroom sink, shower drain and toilet bowl.
14. With the termination valves closed, run the macerator (if equipped) for 10 seconds or until the pump is completely empty.

SPRING STARTUP

After storing the motorhome for an extended period of time, run the water pump to pressurize the water system and check for leaks. Visually inspect the water system for 15 minutes to ensure there are no leaks.

Clean all your appliances and have the LP Gas line purged by a qualified service center. Ensure everything in the motorhome is working correctly. Refer to the chassis manual in the Motorhome Information Kit for any chassis maintenance recommendations.

COLD TEMPERATURE OPERATION

The plumbing system in this motorhome is not designed for cold weather use. Temperatures at or below freezing will cause damage to the plumbing system.

CHASSIS

Check engine coolant level and add antifreeze, if required, to protect against lowest expected temperature. Change engine oil to the recommended viscosity to aid cold weather starting. Refer to the chassis manual in the Motorhome Information Kit for further recommendations.

LP GAS

Use propane for winter traveling because it will vaporize in extremely cold temperatures -40 °F (-40 °C). Butane is not recommended due to its high vaporization temperature 32 °F (0 °C). Using butane in cold temperatures may block the system and cause components to malfunction.

WASTE SYSTEM

Prevent winter freeze-up by adding regular non-toxic RV antifreeze into the toilet and kitchen drains to protect the holding tanks from freezing. Be sure to add a sufficient amount of non-toxic RV antifreeze to protect the total volume of the holding tanks.

⚠ WARNING

Do NOT use alcohol-based antifreeze or other petroleum products.

WATER SYSTEM WINTERIZATION

DRAINING THE WATER SYSTEM

NOTE: Remove the water filter from the cannister before this procedure is performed.

1. Switch off the water pump and disconnect the water hose at city water outside.
2. Switch off the water heater inside the motorhome (above the entrance door).
3. Switch off LP Gas in the outside utility compartment.
4. Drain the fresh water tank. You may want to leave the water tank valve open for winter storage.
5. Relieve the water pressure by opening the hot and cold taps on any faucet.
6. If heater is still hot, be sure to allow the water to cool before proceeding.

⚠ WARNING

If the water heater contents are still hot, serious burns and scalding may occur

7. Drain the water heater (avoid the risk of being scalded.) Outside at the yellow easy drain lever, lift the black clip and fold down the yellow easy drain lever. Remove the water inlet filter and store in a warm dry place. Close the yellow easy drain lever.

⚠ CAUTION

Failure to drain the water heater reservoir may cause damage to the water heater.

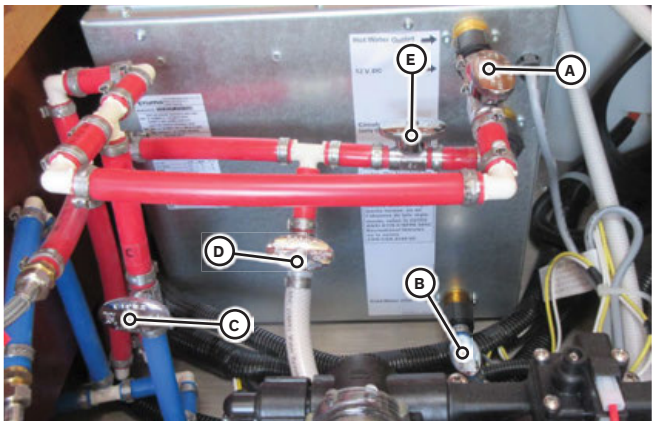

8. Close valves Ⓐ, Ⓑ and Ⓔ.

⚠ CAUTION

Ensure no air pressure or winterization fluid enters the water heater as part of this process.

9. Valve Ⓓ should remain closed at this point.
10. Open valve Ⓒ.
11. Remove the water filter canister (stored under the sink), remove the filter cartridge from the canister and reinstall the water filter canister (make sure it is tight.) Store the filter cartridge in a warm dry place.
12. At this point, you can continue the winterizing process by either adding plumbing anti-freeze to the system, **or** blowing out the airlines. See below for the process on each.

ADDING PLUMBING ANTI-FREEZE

1. Place the suction hose attached to the winterize valve in the utility compartment into a non-toxic plumbing antifreeze container and turn the valve to the winterize position (making sure the city water/ tank fill valve is in the city water position) in order not to get antifreeze into fresh water tank.
2. Switch on the water pump inside (above entrance door) and pump antifreeze through all hot and cold faucets one at a time (including toilet flush with the rinse hose (if equipped)) and outside shower until pink antifreeze appears.
3. Go inside and switch off the water pump. You can now open valve Ⓓ at the water heater inside to drain and relieve the pressure in the water lines. Access the water pump inside the coach, unscrew the filter bowl to access the screen, remove the screen and clean the screen and filter bowl with fresh water before reinstalling both components on the water pump.
4. Go outside and remove the screen from the city water fill connection, depress the center stem until no more fluid drains out (you may or may not see any fluid) and replace the screen in the city water fill connection. Turn the winterize valve to normal flow and place the suction hose in the utility compartment.
5. Remove the water filter canister from under the sink, empty the antifreeze from the canister and reinstall the water filter canister (making sure it is tight.)
6. Remove the cap from the black tank San-T-Flush connection in the utility compartment and attach the blowout plug to the San-T-Flush connection. Blow compressed air through the San-T-Flush connection for about 15 seconds, remove the blowout plug and replace the cap on the SanT-Flush connection.
7. Drain the black and grey waste holding tanks (pull the black waste tank lever first and wait for it to empty then pull the grey waste tank lever.) Make sure tanks are empty and put one cup of antifreeze down each sink drain, shower drain and toilet. If equipped with a macerator pump, put ½ gal. of plumbing antifreeze down the bathroom vanity sink and run the macerator pump until the antifreeze can be seen running through the hose.

BLOWING OUT THE AIR LINES

1. Attach the blow out plug to the city water hookup in the utility center.
2. Connect a compressed air line to the blow out plug.
3. Open all hot and cold water faucets, including the exterior shower, and blow out all water.

NOTE: Place filter/screen in a secure location during the storage period.

⚠ NOTICE

Do NOT depress the toilet flush pedal if there is air pressure in the system or damage to the toilet flush valve could result.

4. Disconnect the compressed air line and remove the blow out plug. Release air pressure by opening all faucets.
5. Remove the water filter canister, empty any

remaining water and reinstall the water filter canister.
6. Drain the black and grey waste holding tanks.
7. Add approximately 1 cup of non-toxic plumbing antifreeze to the kitchen sink, bathroom sink, shower drain and toilet bowl.

DE-WINTERIZING THE WATER SYSTEMS

NOTE: Flush entire water system before filling the hot water tank.

1. Refill the water tank with fresh city water.
2. Turn the bypass valve, located in the utility center, to the “NORMAL FLOW’ position.
3. Turn the hot water heater bypass valve to the “NORMAL FLOW” position.
4. Turn on the water pump switch located on the system monitor panel in the cabinet above the coach door.
5. Open the water faucet furthest away from the water tank. Run the water until clear water appears then shut off the faucet. Repeat this procedure for all remaining faucets including the shower and exterior faucets.
6. Open the hot water line until clear water appears.

MAINTENANCE AND SERVICING

LP GAS TANK VALVE

If the electrically operated LP Gas valve ① (located underneath the motorhome) fails to operate the LP Gas tank, manually turn the valve clockwise to shut off the LP Gas supply.

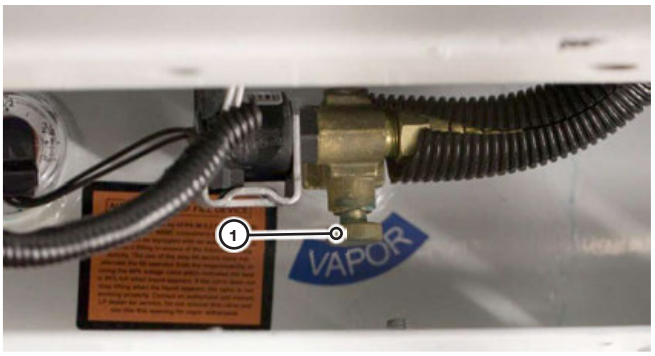

STABILIZERS

If the electrically operated stabilizers ② fail to operate, manually operate the override coupler ③ (located underneath the motorhome) to raise or lower stabilizer units.



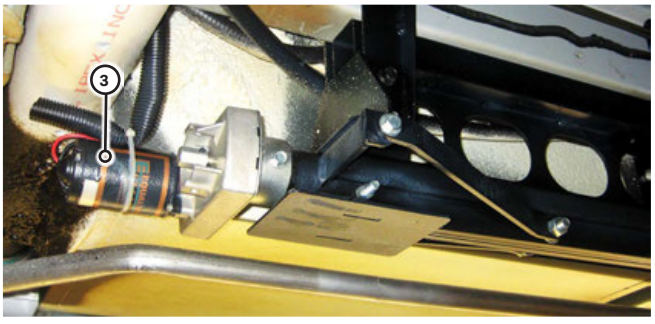

⚠ NOTICE

Refer to the detailed operating and safety instructions in the Motorhome Information Kit before performing the stabilizer override procedure.

Stabilizer force can be adjusted using the stabilizer control module ④ located under the driver's side dinette.



Periodically lubricate the stabilizer jack worm gears ⑤ with silicone spray to ensure consistent performance.

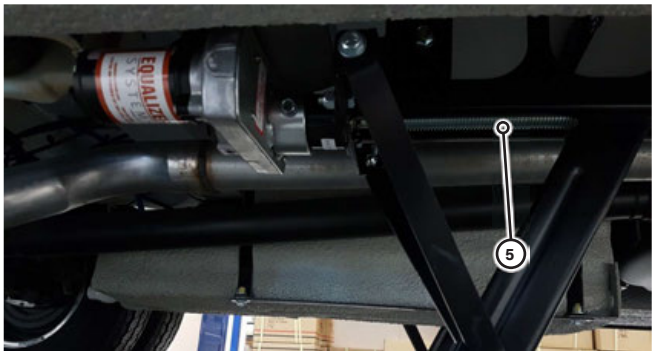

Refer to the stabilizer installation guide located the Motorhome Information Kit for further details on adjustment and maintenance.

ENTRY DOOR STEP

Periodically lubricate the electric entry door step mechanism ⑥. Refer to the electric step manual in the Motorhome Information Kit for details.

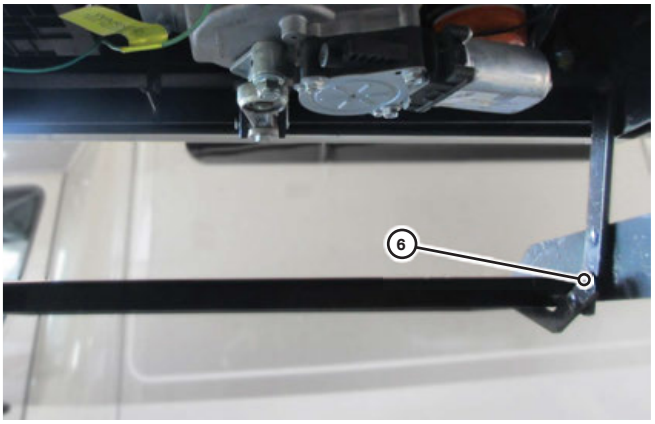

NEW VEHICLE LIMITED WARRANTY

TRIPLE E CANADA LTD.
(REVISED SEPTEMBER 2017)

This New Vehicle Limited Warranty is the sole and only warranty applicable to your new Motorhome. This Warranty is issued by Triple E Canada Ltd., only, which is the manufacturer of your Motorhome. Triple E Canada Ltd., uses a variety of trade and/or division names in marketing or advertising its motorhomes. Triple E Canada Ltd., is referred to throughout this Warranty as "Triple E RV."

1. **Basic Coverage**
   Triple E RV warrants to the first retail purchaser of the Motorhome that all parts of the Motorhome manufactured by Triple E RV will be free from defects in materials and workmanship for a period of twenty-four months or 24,000 miles (40,000 kilometers), whichever occurs first, after the date of purchase by the first retail purchaser of the Motorhome from an authorized Triple E RV dealer. Defective parts shall be repaired or replaced at the election of Triple E RV upon return of the Motorhome to an authorized Triple E RV service center or dealer. In addition, Triple E RV will cover the cost of labor by an authorized Triple E RV service center or dealer to remove, repair and/or replace such defective parts covered by this Warranty.

2. **Structural Coverage**
   Triple E RV warrants to the first retail purchaser of the Motorhome that all structural parts of the Motorhome manufactured by Triple E RV will be free of defects in materials and workmanship for a period of thirty-six months or 36,000 miles (60,000 kilometers), whichever occurs first, after the date of purchase by the first retail purchaser from an authorized Triple E RV dealer. All such defective structural parts shall be repaired or replaced at the election of Triple E RV upon return to an authorized Triple E RV service center or dealer. In addition, Triple E RV will cover the cost of labor by an authorized Triple E RV service center or dealer to remove, repair and/or replace such defective structural parts. For purposes of structural warranty coverage, structural parts shall include only the metal structure of the coach and all metal members welded to it, studs and framing in the walls of the coach, roof rafters and delamination of the fiberglass body parts of the coach. All other items are covered solely by and are limited by the Basic Coverage of this Warranty. On Motorhomes where the chassis is designed and built by another separate manufacturer, Triple E RV makes no structural coverage warranty whatsoever, and the sole and only structural warranty coverage is provided by the manufacturer of the chassis.

3. **Additional Warranty Terms**
   In the event a Motorhome is used for commercial or rental fleet purposes, the Basic Coverage and Structural Coverage Warranties specified above shall be limited to a period of twelve months or 12,000 miles (20,000 kilometers), whichever occurs first, from the date of original purchase. All mileage warranty limitations set forth in this Warranty will be increased by that number of miles or kilometers equal to the miles or kilometers that the Motorhome was driven from its place of original manufacture to its original selling Triple E RV dealership.

   Although the Warranty is extended only to the first retail purchaser of the Motorhome, the Warranty is transferable to the second owner of the Motorhome upon written request to Triple E RV received within thirty (30) days after sale and transfer of title to the Motorhome from its first retail purchaser to its second owner, accompanied by satisfactory proof of sale and transfer. Warranties for any Motorhome used in an RV rental or lease fleet or for a commercial use are not transferable to any subsequent dealer, owner, fleet operator or retail or consumer purchaser.

4. **Component Warranties**
   Triple E RV obtains many items of equipment, appliances, components, sub-assemblies and/or the chassis of the Motorhome (referred to in this Warranty as a "Component") from other manufacturers. Each of these manufacturers offers its own separate warranty (and in some cases warranty extension programs) covering its respective Component(s). Triple E RV assigns to the first purchaser of the Motorhome each and

every such separate warranty with respect to a Component as the sole, exclusive and only warranty in respect of such Component. Triple E RV provides no separate or independent warranty coverage for any such Component(s). The rights of a purchaser or owner of a Triple E RV Motorhome in respect of such separate Component(s) or the warranties covering such Component(s) may be conditioned upon or limited by the specific terms and conditions of such separate warranties. Information on separate Component warranties and registration for such warranties from Component manufacturers may be found in the Information Kit.

5. Chassis

The Motorhome chassis and all components, assemblies, equipment or parts supplied or affixed to the chassis as received by Triple E RV from its supplier or manufacturer are Components and are covered only under separate warranties issued by the original chassis or Component manufacturer. Even if Triple E RV modifies the chassis in order to assemble the Motorhome, the sole warranty in respect of the chassis is provided by the manufacturer of the chassis. Please contact us for details about our responsibilities for chassis modifications before beginning any repairs.

6. Exclusions from Warranty

The foregoing Warranty does not apply to any Motorhome which has been altered outside of the Triple E RV factory in a way which in our judgment affects its stability, operation or reliability or which has been subject to misuse, negligence or accident. The foregoing Warranty does not cover any Motorhome that has been shipped to a location outside of the United States or Canada. The foregoing Warranty excludes and does not cover or provide any remedy for damage, defects or loss resulting from abuse or misuse of the Motorhome or its equipment, appliances, components, sub-assemblies and/or chassis, failure to properly winterize the Motorhome, failure to provide regular maintenance and/or service, adjustments, tune ups, alignments, road service or failure to protect the Motorhome from further damage if any initial indication of damage has occurred. The Warranty excludes failure caused by overheating (regardless of cause), contamination of lubricants, coolants, failure of hoses, fittings, connections or lines and failure to operate and maintain the Motorhome as recommended or required in the Owner's Manual.

Your Warranty may be lost, restricted or limited if your Motorhome is not properly maintained in accordance with regularly-scheduled maintenance recommendations of both Triple E RV and any manufacturers of Components, and/or the chassis of your Motorhome. Your Warranty does not cover loss, defects or failures resulting from exposure to extreme conditions, including extremely cold weather.

Your Warranty does not cover defects or repairs required because of improper loading, load distribution, accident, collision, vandalism, abuse, misuse, neglect, fire, flood, normal wear or improper or inadequate maintenance, rust or corrosion, exposure to elements or costs incurred in towing, transporting or presenting your Motorhome for repair under the Warranty. This Warranty does not cover any Component not manufactured by Triple E RV, nor does it cover sealant, trims, fabrics, floor coverings, upholstery, draperies, blinds, paint, gel coat or decals which have experienced normal pigmentation or color changes as the result of use, age, exposure to the sun or weather.

This Warranty excludes and does not provide coverage for consequential or incidental damages, such as the loss of your Motorhome, loss of time, inconvenience, expenses, transportation to and from the dealer or manufacturing plant location, bus, taxi or air fares, telephone, travel, rental vehicle, overnight accommodations, loss or damage to your personal property, commercial loss, loss of income, loss of use or other incidental or consequential damages or expenses.

T**he express warranties stated herein are the sole and only warranties issued by Triple E RV in respect of your Motorhome, and Triple E RV hereby expressly disclaims all other warranties, including implied warranties of merchantability or warranties of fitness for any particular purpose. Neither your dealer nor any other person is authorized to create or imply any other warranty on behalf of Triple E RV**

beyond those expressed herein. Your warranty expressly excludes liability for incidental or consequential damages.

7. Obtaining Warranty Repairs

To obtain warranty repairs, you must at your own cost present your Motorhome to an authorized service center or dealer during normal business hours and provide a written list of claimed defects or items to be repaired. If requested, you may be required to provide records showing that the Motorhome has been maintained as required or recommended by the Owner's Manual. As the owner, you are solely responsible for maintenance of the Motorhome as required or recommended by the Owner's Manual and associated costs of that maintenance. Repairs necessitated by failure to maintain the Motorhome as required or recommended are not covered by this Warranty.

If an authorized service center or dealer is unwilling or unable to make a warranty repair, Triple E RV may request the opportunity to cause those repairs to be made at another authorized service center or dealer. Refusal to grant a request to transport the Motorhome to another authorized service center or dealer at Triple E RV's cost and expense for mileage for such travel may void Warranty coverage for the requested repairs.

8. Questions about Warranty Services

You may contact the Triple E RV Warranty Department at its toll free number (1-877-992-9906) if you have a question about this Warranty or need assistance in locating an authorized service center or dealer or if you are dissatisfied with Warranty repairs. You should also contact the Triple E RV Warranty Department at this toll free number in the event it is necessary to have Warranty repairs performed at a site other than an authorized Triple E RV service center or dealer. All such repairs performed at a site other than an authorized Triple E RV service center or dealer must be authorized by the Triple E RV Warranty Department before Warranty work can be done. Prior authorization is necessary to ensure the availability of Warranty coverage and to determine that the facility is qualified to perform such repair work.

9. Time Limitation for Initiating Claims

Any claim for breach of this Warranty or any applicable implied or statutory warranty must be initiated within one year after the date on which the breach allegedly occurs.

10. Sole and Exclusive Remedy

Your sole and exclusive remedy for breach of this Warranty is monetary damages in an amount equal to the actual cost of material and/or labor necessary to repair or replace defective parts that were not repaired or replaced under this Warranty. Incidental and consequential damages are not recoverable. Some states or provinces may not allow for the exclusion or limitation of incidental or consequential damages, and in such states, the above limitation or exclusion may be limited or may not apply at all.

Product improvement is an ongoing process at Triple E RV. We reserve the right to change specifications, operating instructions, standards and options on any and all products without prior notice and without imposing any additional obligation on Triple E RV to install the same upon its products which were manufactured prior to such changes.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state and/or by province.

NOTES



LEISURE

TRAVEL VANS

LTV Roadside Assistance

4287 Beltline Road, Box #198
Addison, TX 75001

for EMERGENCY ROADSIDE CALL
1•877•219•3831





Triple E Recreational Vehicles and Leisure Travel Vans are brands and trademarks of Triple E Canada Ltd.

301 Roblin Blvd., Box 1230 Winkler, MB Canada R6W 4C4
Telephone: 204-325-4361 Fax: 204-325-5241

US Address: P.O. Box 68 Walhalla, ND 58282

www.tripleerv.com • info@tripleerv.com • www.leisurevans.com • general@leisurevans.com

Product improvement is a continuing process at Triple E Recreational Vehicles.
We reserve the right to change specifications, operating instructions, standards and options on any products without prior notice. The information, illustrations and pictures within this document are current at the time of printing.

Copyright, Triple E Canada Ltd.
P/N 146-4593 - April 2020

Printed in Canada